


塑膠浪管 CORRUGATED TUBE



(尺寸 DIMENSION : mm)


規格 SPECIFICATIONS

標準管徑 NOMINAL TUBE SIZE	平均外徑D AVERAGE OUTSIDE DIAMETER		平均內徑d AVERAGE INSIDE DIAMETER		參考厚度 THICKNESS	備註 REMARKS
	外徑 OUTSIDE DIAMETER	容許差 ALLOWANCE	內徑 INSIDE DIAMETER	容許差 ALLOWANCE		
COT5-7	7.7	±0.4	5.5	±0.4	0.2	
COT7-10	10.2	±0.4	7.6	±0.4	0.2	
COT10-13	14.0	±0.4	10.7	±0.4	0.2	
COT13-16	17.5	±0.4	13.5	±0.4	0.2	
COT16-20	20.0	±0.4	15.6	±0.4	0.2	
COT20-24	24.8	±0.4	19.6	±0.4	0.2	
COT24-28	28.0	±0.4	23.8	±0.4	0.2	
COT28-34	34.5	±0.4	28.5	±0.4	0.2	
COT5-7X	7.7	±0.4	5.5	±0.4	0.2	
COT7-10X	10.2	±0.4	7.6	±0.4	0.2	
COT10-13X	14.0	±0.4	10.7	±0.4	0.2	
COT13-16X	17.5	±0.4	13.5	±0.4	0.2	
COT16-20X	20.0	±0.4	15.6	±0.4	0.2	
COT5-7-UL	7.7	±0.4	5.5	±0.4	0.2	
COT7-10-UL	10.2	±0.4	7.6	±0.4	0.2	
COT10-13-UL	14.0	±0.4	10.7	±0.4	0.2	
COT13-16-UL	17.5	±0.4	13.5	±0.4	0.2	
COT16-20-UL	20.0	±0.4	15.6	±0.4	0.2	
COT20-24-UL	24.8	±0.4	19.6	±0.4	0.2	
COT24-28-UL	28.0	±0.4	23.8	±0.4	0.2	
COT28-34-UL	34.5	±0.4	28.5	±0.4	0.2	
COT5-7X-UL	7.7	±0.4	5.5	±0.4	0.2	
COT7-10X-UL	10.2	±0.4	7.6	±0.4	0.2	
COT10-13X-UL	14.0	±0.4	10.7	±0.4	0.2	

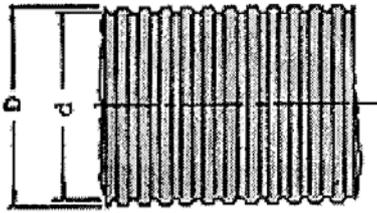


項次 ITEM	項目 DESCRIPIONS	編號 PART NO.	耐熱溫度 MAXIMUM SERVICE TEMPERATURE(°C)
1	PP	COT__-__X	80
2	PP剖開 (SLIT)	COT__-__	80
3	NYLON	COT__-__X-UL	120
4	NYLON剖開 (SLIT)	COT__-__-UL	120

PVC TUBE

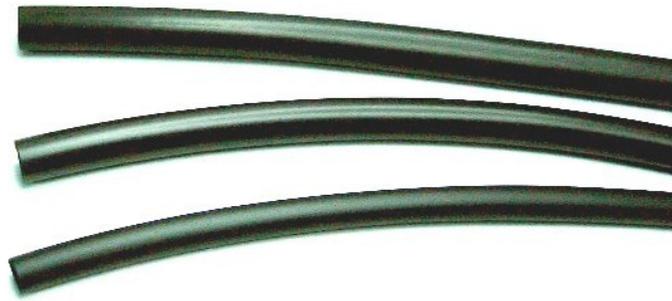

(尺寸 DIMENSION : mm)

規格 SPECIFICATIONS

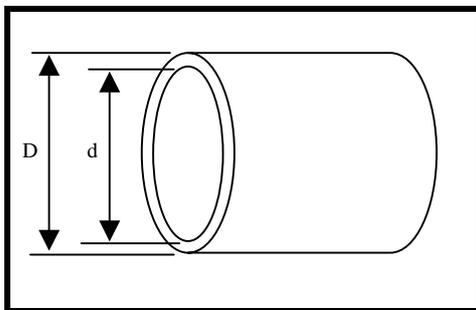

標準管徑 NOMINAL TUBE SIZE	平均外徑D AVERAGE OUTSIDE DIAMETER		平均內徑d AVERAGE INSIDE DIAMETER		參考厚度 THICKNESS	備註 REMARKS
	外徑 OUTSIDE DIAMETER	容許差 ALLOWANCE	內徑 INSIDE DIAMETER	容許差 ALLOWANCE		
VTV15	6.0	+0.1 -0.08	5.0	+0.1 -0.08	0.5	
VTV18	6.5	+0.1 -0.08	5.5	+0.1 -0.08	0.5	
VTV20	7.0	+0.1 -0.08	6.0	+0.1 -0.08	0.5	
VTV25	9.0	+0.1 -0.08	8.0	+0.1 -0.08	0.5	
VTV30	10.5	+0.1 -0.08	9.5	+0.1 -0.08	0.5	
VTV35	12	+0.1 -0.08	11.0	+0.1 -0.08	0.5	
VTV40	13.5	+0.1 -0.08	12.5	+0.1 -0.08	0.5	
VTV45	15.5	+0.1 -0.08	14.5	+0.1 -0.08	0.5	
VTV50	17.0	+0.1 -0.08	16.0	+0.1 -0.08	0.5	
VTV60	20.0	+0.1 -0.08	19.0	+0.1 -0.08	0.5	
VTV65	21.5	+0.1 -0.08	20.5	+0.1 -0.08	0.5	
VTV70	23.0	+0.1 -0.08	22.0	+0.1 -0.08	0.5	
VTV80	26.5	+0.1 -0.08	25.5	+0.1 -0.08	0.5	
VTV90	29.5	+0.1 -0.08	28.5	+0.1 -0.08	0.5	
VTV20-1.0	8.0	+0.15 -0.1	6.0	+0.15 -0.1	1.0	
VTV25-1.0	10.2	+0.15 -0.1	8.0	+0.15 -0.1	1.0	
VTV30-1.0	11.5	+0.15 -0.1	9.5	+0.15 -0.1	1.0	
VTV35-1.0	13.0	+0.15 -0.1	11.0	+0.15 -0.1	1.0	
VTV40-1.0	14.5	+0.15 -0.1	12.5	+0.15 -0.1	1.0	
VTV45-1.0	16.0	+0.15 -0.1	14.0	+0.15 -0.1	1.0	


項次 ITEM	項目 DESCRIPIONS	編號 PART NO.	耐熱溫度 MAXIMUM SERVICE TEMPERATURE(°C)
1	PVC	VTX__	105
2	PVC剖開 (SLIT)	VTV__	105

SILICONE COATED FIBERGLASS SLEEVES / TUBES



(尺寸 DIMENSION : mm)

規格 SPECIFICATIONS

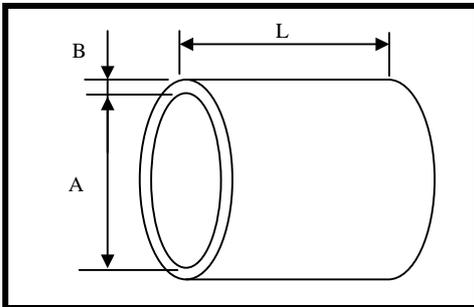

標準管徑 NOMINAL TUBE SIZE φ (A)	容許差 ALLOWANCE	厚度 THICKNESS (B)	長度 LENGTH (L)	溫度(°C) TEMPERATURE	耐電壓(V) VOLTAGE	備註 REMARKS
1.0	+0.3 -0.1	0.4 ± 0.12	1000 以下 ±5 1000 以上 +20 -0	180	1500	
1.5	+0.3 -0.1	0.4 ± 0.12				
2.0	+0.3 -0.15	0.4 ± 0.12				
2.5	+0.3 -0.15	0.4 ± 0.12				
3.0	+0.3 -0.15	0.5 ± 0.12	+5 -0			
3.5	+0.3 -0.15	0.5 ± 0.12	1000 以下 ±5 1000 以上 +20 -0			
4.0	+0.3 -0.15	0.5 ± 0.12				
5.0	+0.5 -0.5	0.5 ± 0.12				
6.0	+0.5 -0.5	0.5 ± 0.12				
7.0	+0.5 -0.5	0.5 ± 0.12				
8.0	+0.5 -0.5	0.5 ± 0.12				
9.0	+0.5 -0.5	0.6 ± 0.12				
10.0	+0.5 -0.5	0.6 ± 0.12				
12.0	+1.5 -0.5	0.6 ± 0.12			2000	
14.0	+1.5 -0.5	0.6 ± 0.12				
16.0	+1.5 -0.5	0.6 ± 0.12				