
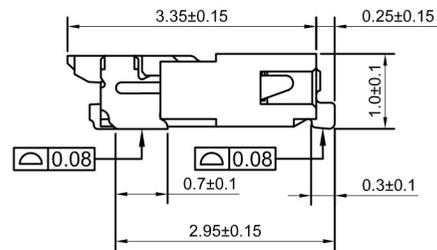
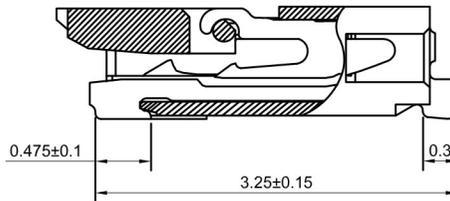
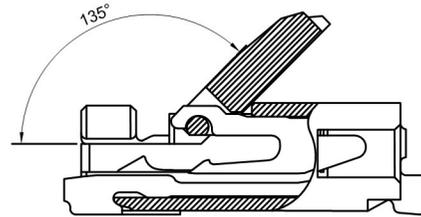

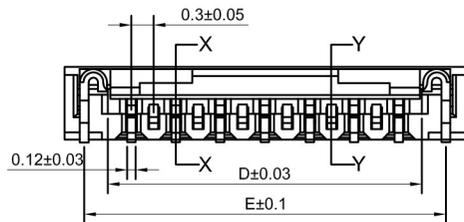


CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

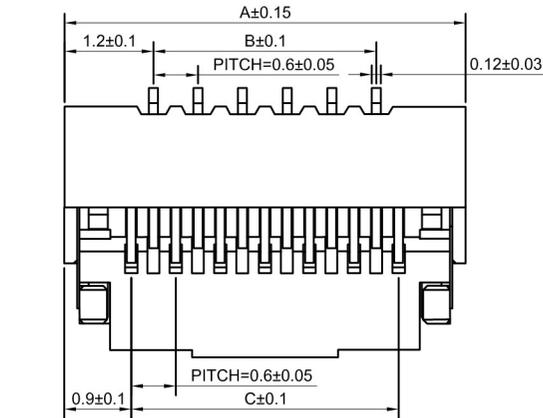

- ◆ Specifications:
 - Operating Voltage:30V
 - Current Rating: 0.2A
 - Withstand Voltage: 250V
 - Contact Resistance:40mΩ
 - Insulation resistance:50MΩ
 - Operating Temperature:-55°C~+85°C

◆ PART NO.

F0.3 - XXSBBTJ

- MOULD NO.
- TUBE
- FLIP LOCK
- HORIZONTAL BOTTOM CONTACT
- SMT
- CIRCUITS NUMBER 09 TO 71
- 0.3 mm SPACING
- FFC CONNECTOR

孔位	DIM A	DIM B	DIM C	DIM D	DIM E
09	4.2	1.8	2.4	3.03	3.7
11	4.8	2.4	3.0	3.63	4.3
13	5.4	3.0	3.6	4.23	4.9
15	6.0	3.6	4.2	4.83	5.5
17	6.6	4.2	4.8	5.43	6.1
19	7.2	4.8	5.4	6.03	6.7
21	7.8	5.4	6.0	6.63	7.3
23	8.4	6.0	6.6	7.23	7.9
25	9.0	6.6	7.2	7.83	8.5
27	9.6	7.2	7.8	8.43	9.1
29	10.2	7.8	8.4	9.03	9.7
31	10.8	8.4	9.0	9.63	10.3
33	11.4	9.0	9.6	10.23	10.9

孔位	DIM A	DIM B	DIM C	DIM D	DIM E
35	12.0	9.6	10.2	10.83	11.5
37	12.6	10.2	10.8	11.43	12.1
39	13.2	10.8	11.4	12.03	12.7
41	13.8	11.4	12.0	12.63	13.3
43	14.4	12.0	12.6	13.23	13.9
45	15.0	12.6	13.2	13.83	14.5
49	16.2	13.8	14.4	15.03	15.7
51	16.8	14.4	15.0	15.63	16.3
57	18.6	16.2	16.8	17.43	18.1
61	19.8	17.4	18.0	18.63	19.3
67	21.6	19.2	19.8	20.43	21.1
71	22.8	20.4	21.0	21.63	22.3

				一般公差 ±0.2
A	FIRST DRAWING	UNA	2019.06.25	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
CHECK BY/審查	DATE/日期	PRODUCT NAME/品名			
JASON	2019.06.25	FPC0.3mm PITCH BOTTOM OF CONTACT SMT			
APPROVED BY/核准	DATE/日期	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
WENDY	2019.06.25	F0.3-XXSBBTJ	09-71	10:1	A4
PACKAGE/包裝	TUBE	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼
		LCP UL94V-0	BLACK COLOR	10°	1 OF 1
		COPPER ALLOY			REV/版本
					A