

4

3






2

1

# CROWN LINK<sup>®</sup>

專業薄膜開關連接器第一品牌

RoHS

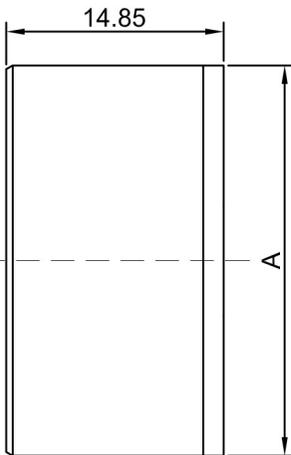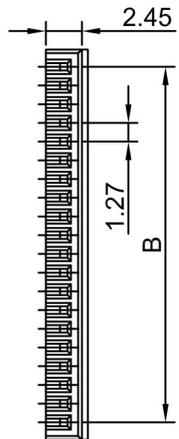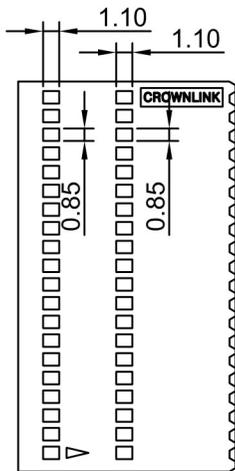

- ◆ FOR 2807 SERIES CONNECTOR
- ◆ SPECIFICATIONS
  - VOLTAGE RATING: 250 VAC RMS
  - CURRENT RATING: 2A
  - INSULATION RESISTANCE: 500MΩ
- ◆ ENVIRONMENTAL
  - TEMPERATURE RANGE: -25°C~125°C
- ◆ PART NO
  - 2807H - XX
- SERIES NO.
  - CIRCUITS NUMBER 02 TO 30

◆ SPECIFIED TOLERANCE

PIN NO.	A	B	PIN NO.	A	B	PIN NO.	A	B
02	3.61	1.27	12	16.31	13.97	22	29.01	26.67
03	4.88	2.54	13	17.58	15.24	23	30.28	27.94
04	6.15	3.81	14	18.85	16.51	24	31.55	29.21
05	7.42	5.08	15	20.12	17.78	25	32.82	30.48
06	8.69	6.35	16	21.39	19.05	26	34.09	31.75
07	9.96	7.62	17	22.66	20.32	27	35.36	33.02
08	11.23	8.89	18	23.93	21.59	28	36.63	34.29
09	12.50	10.16	19	25.20	22.86	29	37.90	35.56
10	13.77	11.43	20	26.47	24.13	30	39.17	36.83
11	15.04	12.70	21	27.74	25.40			

				一般公差 ± 0.2
B	The double-sided window hole becomes the single-sided window hole	MARY	2017.11.09	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	
				TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期
Mary	2017.11.09
CHECK BY/審查	DATE/日期
VIVIAN	2017.11.09
APPROVED BY/核准	DATE/日期
JASON	2017.11.09
PACKAGE/包裝	
02-07 PIN 1,000 PCS/BAG	08-30 PIN 500 PCS/BAG

<b>CROWN LINK<sup>®</sup> THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>					
PRODUCT NAME/品名 1.27mm PITCH HOUSING FOR FFC/FPC					
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位	
2807H-XX	2-30 PIN	3:1	A4	mm	
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本	
LCP	BLACK		1 OF 1	B	

D

D

C

C

B

B

A

A