

4

3




2

1

# CROWN LINK<sup>®</sup>

專業薄膜開關連接器第一品牌

RoHS

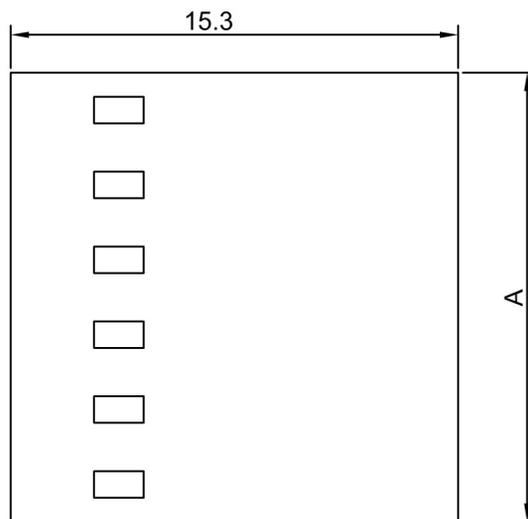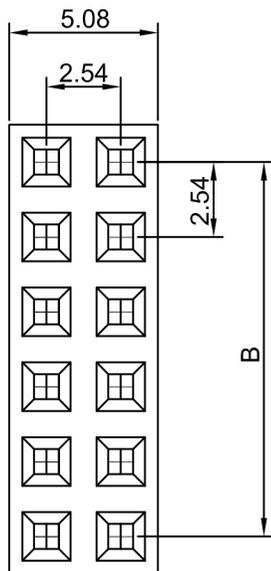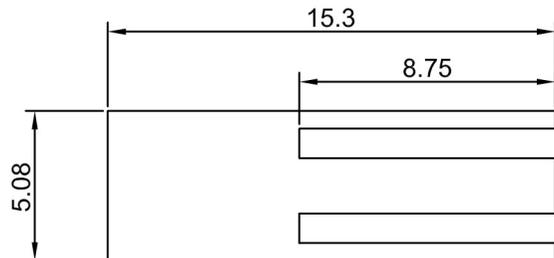

- ◆ FOR 2802、2808 SERIES CONNECTOR
- ◆ SPECIFICATIONS
  - VOLTAGE RATING: 250 VAC RMS
  - CURRENT RATING: 2A
  - INSULATION RESISTANCE: 500 MΩ MIN
- ◆ ENVIRONMENTAL
  - TEMPERATURE RANGE: -25°C~+85°C
- ◆ DIMENSION: N=CIRCUIT NO.
  - A=2.54\*N/2
  - B=2.54\*(N/2-1)
- ◆ PART NO.
  - 2802H - XXDNS
  - SERIES NO.                      MOLD NO.
  - NO LOGO
  - DOUBLE ROW
  - CIRCUITS NUMBER 04 TO 50

				一般公差 ± 0.2
A	FIRST DRAWING	ANNIE	2012.08.07	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	
				TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	<b>CROWN LINK<sup>®</sup> THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>				
MARY	2018.05.11	PRODUCT NAME/品名				
CHECK BY/審查	DATE/日期	2.54mm PITCH HOUSING FOR FFC/FPC				
VIVIAN	2018.05.11	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
APPROVED BY/核准	DATE/日期	2802H - XXDNS	4-50 PIN	4:1	A4	mm
JASON	2018.05.11	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PACKAGE/包裝	04-20 PIN 1,000 PCS/BAG 22-38 PIN 500 PCS/BAG 40-50 PIN 250 PCS/BAG	PBT UL 94V - 0	BLACK COLOR		1 OF 1	A