

4

3



2

1


# CROWN LINK®

專業薄膜開關連接器第一品牌



RoHS

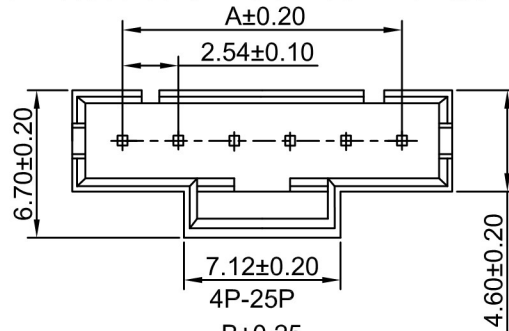

3P



2P

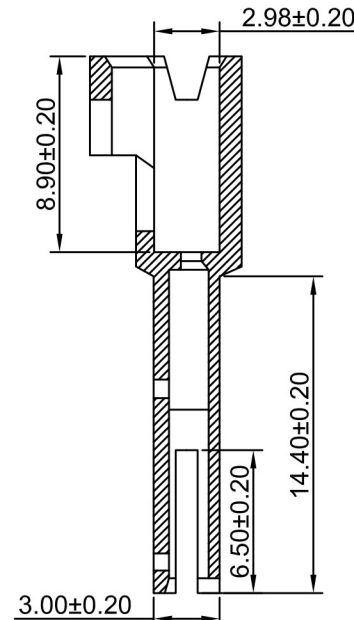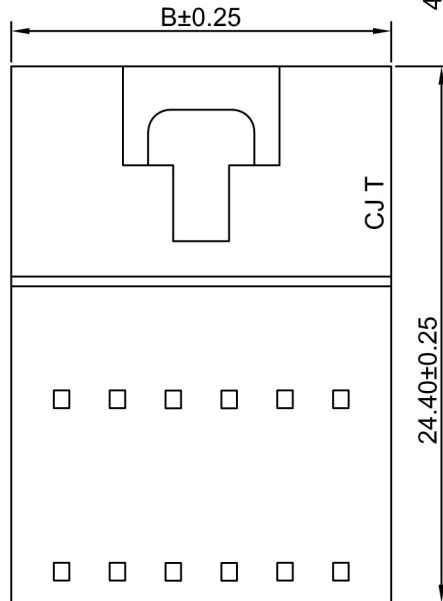

◆ SPECIFICATIONS

CURRENT RATING: 3A AC, DC

VOLTAGE RATING: 300V AC, DC

INSULATION RESISTANCE: 1000 mΩ Min

CONTACT RESISTANCE: 5 mΩ MAX

WITHSTANDING VOLTAGE: 1100V AC/MINUTE

◆ ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C

◆ DIMENSION:

CIRCUITS	A	B	CIRCUITS	A	B
2P	2.54	7.12	14P	33.02	37.60
3P	5.08	9.66	15P	35.56	40.14
4P	7.62	12.20	16P	38.10	42.68
5P	10.16	14.74	17P	40.64	45.22
6P	12.70	17.28	18P	43.18	47.76
7P	15.24	19.82	19P	45.72	50.30
8P	17.78	22.36	20P	48.26	52.84
9P	20.32	24.90	21P	50.8	55.38
10P	22.86	27.44	22P	53.34	57.92
11P	25.40	29.98	23P	55.88	60.46
12P	27.94	32.52	24P	58.42	63.00
13P	30.48	35.06	25P	60.96	65.54

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	LACY	2019.10.21	一般公差 ±0.3

DRAWN/繪圖	DATE/日期
LACY	2019.10.21
CHECK BY/審查	DATE/日期
VIVIAN	2019.10.21
APPROVED BY/核准	DATE/日期
WENDY	2019.10.21
PACKAGE/包裝	1,000 PCS/BAG

CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.					
PRODUCT NAME/品名					
2.54mm PITCH HOUSING FOR FFC/FPC					
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位	
2812HL-XXC	2-25 PIN		A4	mm	
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本	
PBT UL 94V-0	BLACK COLOR		1 OF 1	A	