
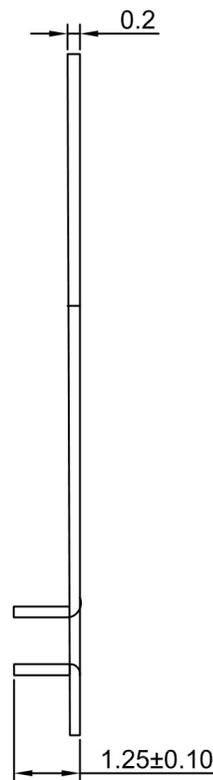


CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

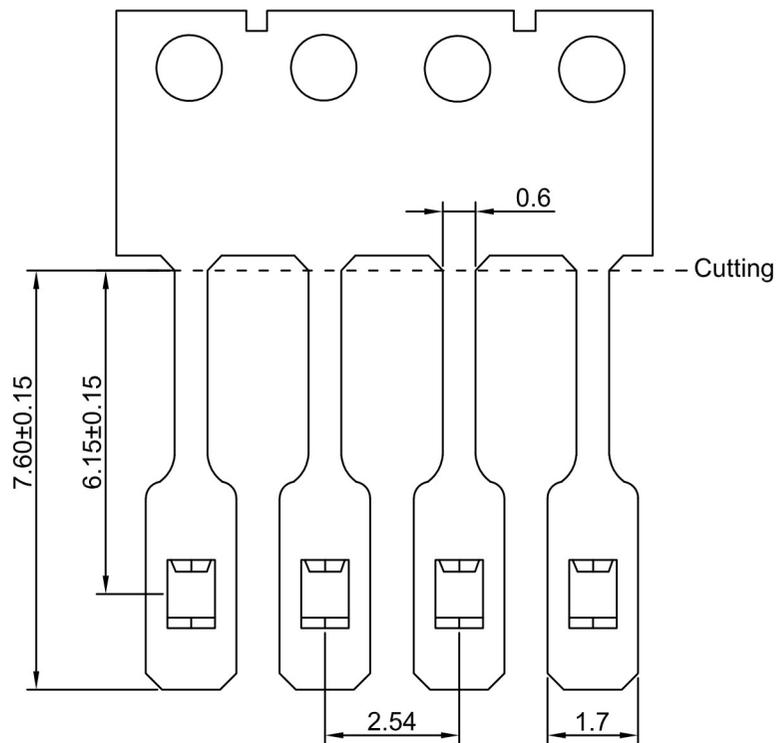

0T:TIN PLATED

◆SPECIFICATIONS

VOLTAGE RATING: 250 VAC RMS

CURRENT RATING: 3 AMP

DIELECTRIC WITHSTANDING VOLTAGE:

AC 250V FOR 1 MINUTE

INSULATION RESISTANCE: 500 MΩ

◆ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C

◆PART NO.

2808 - 35K - 0T - SMH

SERIES NO.

35K/REEL

SHORT MALE

0T: TIN PLATED

OTHER PLATINGS ON REQUEST.

				一般公差±0.2 TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	MARY	2018.12.04	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	

DRAWN/繪圖 UNA	DATE/日期 2018.12.04
CHECK BY/審查 JASON	DATE/日期 2018.12.04
APPROVED BY/核准 WENDY	DATE/日期 2018.12.04
PACKAGE/包裝	35,000PCS/REEL

<p>CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.</p>					
<p>PRODUCT NAME/品名 2.54mm PITCH CONNECTOR FOR CABLE</p>					
PART NO./料號 2808-35K-0T-SMH	SCALE/比例 5:1	SIZE/圖號 A4	UNIT/單位 mm		
MATERIAL/材質 PHOSPHOR BRONZE	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 A		