



CROWN LINK®

專業薄膜開關連接器第一品牌

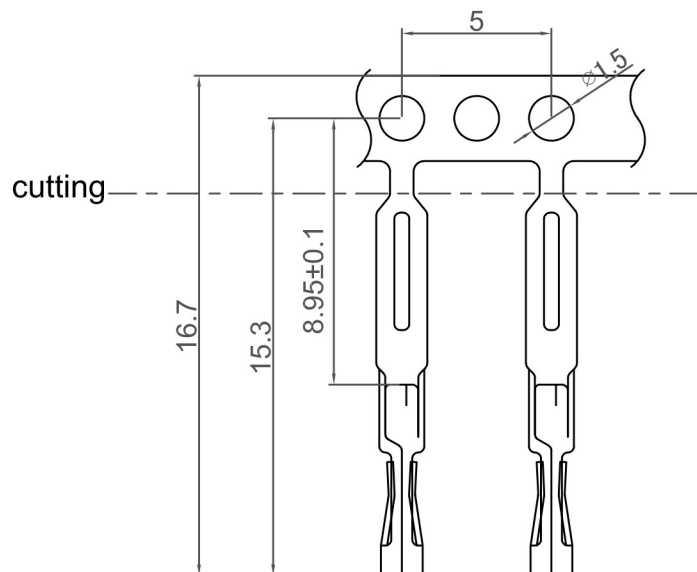

OT:TIN PLATED.

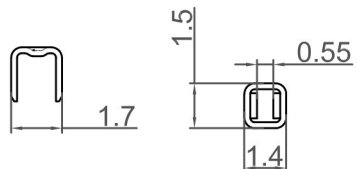

MT:MATTE TIN PLATED.



OG:GOLD PLATED.

RoHS

◆FOR 2804 SERIES HOUSING

◆SPECIFICATIONS

VOLTAGE RATING: 250 VAC RMS.

CURRENT RATING: 3 AMP.

DIELECTRIC WITHSTANDING VOLTAGE:

AC 250V FOR 1 MINUTE.

INSULATION RESISTANCE: 500 MΩ.

◆ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C.

◆PART NO.


2804 - 10K - 0T(MT/OG) - F

SERIES NO.

10K/REEL.

FEMALE.

0T:TIN PLATED.
MT:MATTE TIN PLATED.
OG:GOLD PLATED.
OTHER PLATINGS ON REQUEST.

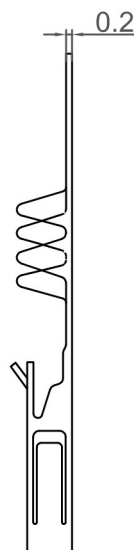

C	THIMBLE HEIGHT UPDATE	MARY	2017.09.02	X. ±0.20
B	FORMAT UPDATE	TRACY	2016.05.12	. X ±0.10
A	FIRST RELEASE	TRACY	2015.06.04	.XX ±0.05
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖 UNA	DATE/日期 2019.08.28	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
CHECK BY/審查 VIVIAN	DATE/日期 2019.08.28	PRODUCT NAME/品名 5.00mm PITCH FFC/FPC CONNECTOR			
APPROVED BY/核准 WENDY	DATE/日期 2019.08.28	PART NO./料號 2804-10K-0T(MT/OG)-F	SCALE/比例 1:1	SIZE/圖號 A4	UNIT/單位 mm
PACKAGE/包裝	10,000PCS/REEL	MATERIAL/材質 C5210-H	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 B