
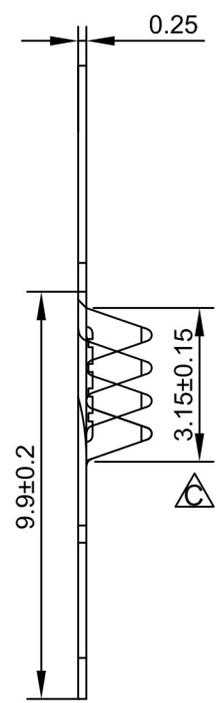


CROWN LINK®

專業薄膜開關連接器第一品牌

RoHS

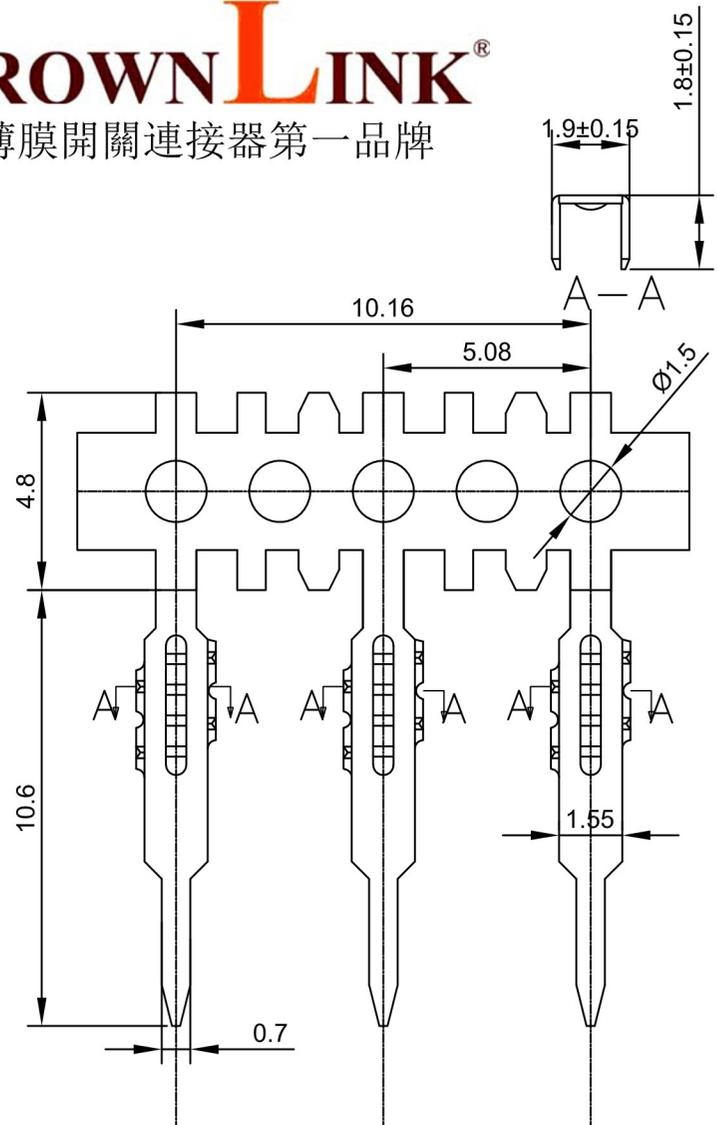

0T:TIN PLATED

◆ SPECIFICATIONS

- VOLTAGE RATING: 250 VAC RMS
- CURRENT RATING: 3 AMP
- DIELECTRIC WITHSTANDING VOLTAGE:
AC 250V FOR 1 MINUTE
- INSULATION RESISTANCE: 500 MΩ

◆ ENVIRONMENTAL

- TEMPERATURE RANGE: -40°C~+105°C

◆ PART NO.

2806- 10K - 0T -MB2

SERIES NO. 10K/REEL

MALE

0T:TIN PLATED

OTHER PLATINGS ON REQUEST

SERIAL NUMBER
MOLD NO.

C	MODIFY DIMENSION	TRACY	2015.12.22	X. ±0.2 .X ±0.1 .XX ±0.05
B	INCREASE DIMENSION	TRACY	2015.11.25	
A	FIRST DRAWING	ANNIE	2012.08.02	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
TRACY	2015.12.22	PRODUCT NAME/品名 2.54mm PITCH FFC/FPC CONNECTOR			
CHECK BY/審查	DATE/日期	PART NO./料號	SCALE/比例	SIZE/圖號	UNIT/單位
VIVIAN	2015.12.22	2806-10K-0T-MB2	5:1	A4	mm
APPROVED BY/核准	DATE/日期	MATERIAL/材質	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
JASON	2015.12.22	PHOSPHOR BRONZE		1 OF 1	C
PACKAGE/包裝	10,000PCS/REEL				