

4

3

2

1


CROWN LINK[®]

專業薄膜開關連接器第一品牌

RoHS



SECTION B-B

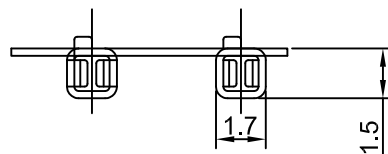

SECTION A-A




0T:TIN PLATED





MT:MATTE TIN PLATED



0G:GOLD PLATED

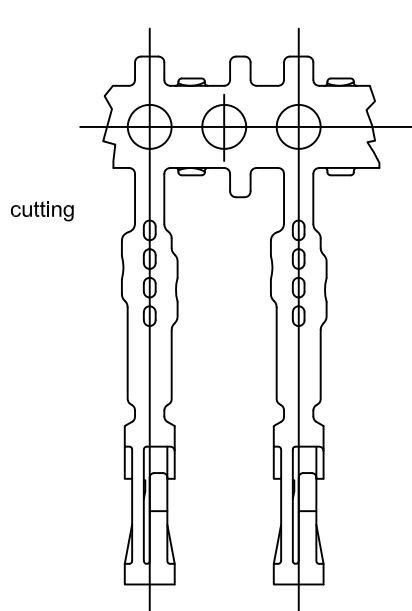

cutting

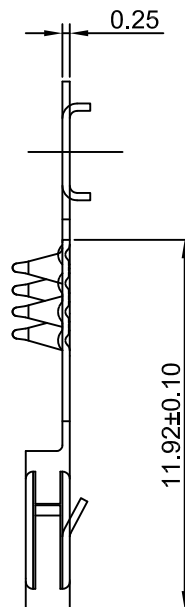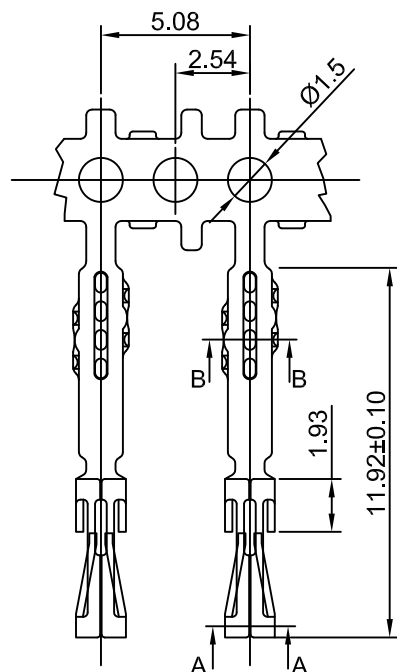

◆FOR 2806 SERIES HOUSING

◆SPECIFICATIONS

VOLTAGE RATING: 250 VAC RMS

CURRENT RATING: 3 AMP

DIELECTRIC WITHSTANDING VOLTAGE:

AC 250V FOR 1 MINUTE

INSULATION RESISTANCE: 500 MΩ

◆ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C

◆PART NO.

2806P - 15K - 0T(MT/0G) - FH

SERIES NO.

15K/REEL

MOLD NO.

FEMALE

0T:TIN PLATED

MT:MATTE TIN PLATED

0G:GOLD PLATED

OTHER PLATINGS ON REQUEST

				X. ±0.20
				.X ±0.10
				.XX ±0.05
B	PART NO. CHANGE	ANNIE	2013.05.13	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
UNA	2019.08.28				
CHECK BY/審查	DATE/日期	PRODUCT NAME/品名			
VIVIAN	2019.08.28	5.08mm PITCH FFC/FPC CONNECTOR			
APPROVED BY/核准	DATE/日期	PART NO./料號	SCALE/比例	SIZE/圖號	UNIT/單位
WENDY	2019.08.28	2806P-15K-0T(MT/0G)-FH	4:1	A4	mm
PACKAGE/包裝	15,000PCS/REEL	MATERIAL/材質	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
		PHOSPHOR BRONZE		1 OF 1	B