

4

3


2

1

CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

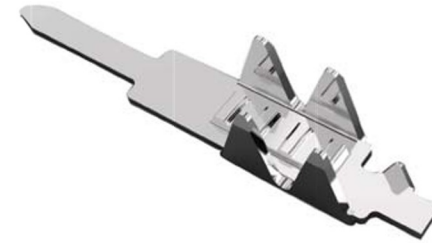

0T:TIN PLATED

◆ SPECIFICATIONS

VOLTAGE RATING: 250V AC RMS

CURRENT RATING: 3 AMP

DIELECTRIC WITHSTANDING VOLTAGE:

AC 250V FOR 1 MINUTE

INSULATION RESISTANCE: 500 MΩ

◆ ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C

◆ PART NO.

2806P - 10K - 0T - MX



SERIES NO.

10K/REEL

MALE

0T:TIN PLATED

MOLD NO.

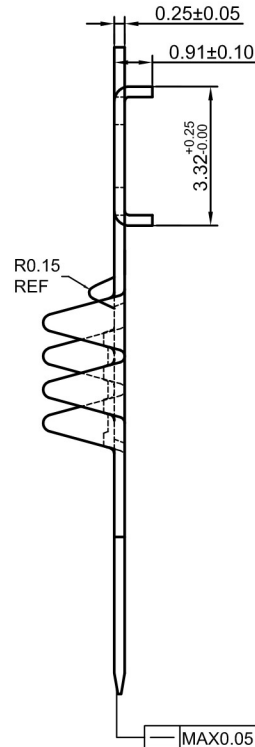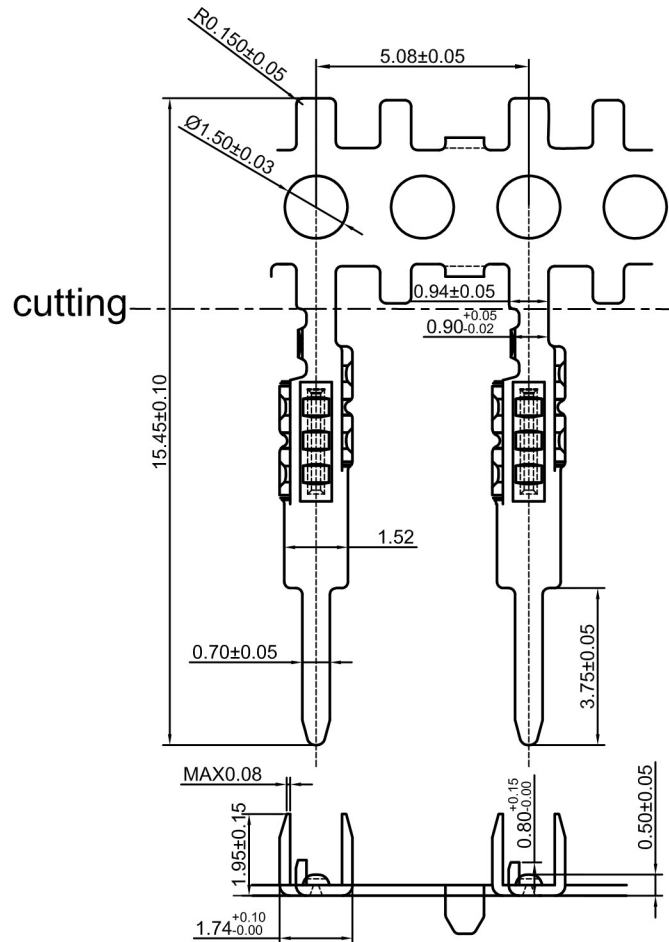

A	FIRST DRAWING	MARY	2018.03.26
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期

X.	±0.20
.X	±0.10
.XX	±0.05
TOLERANCE RANGE/公差範圍	

DRAWN/繪圖	DATE/日期	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2018.03.26				
CHECK BY/審查	DATE/日期	PRODUCT NAME/品名 5.08mm PITCH FFC/FPC CONNECTOR			
VIVIAN	2018.03.26				
APPROVED BY/核准	DATE/日期	PART NO./料號	SCALE/比例	SIZE/圖號	UNIT/單位
JASON	2018.03.26	2806P-10K-0T-MX	4:1	A4	mm
PACKAGE/包裝	10,000PCS/REEL	MATERIAL/材質	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
		PHOSPHOR BRONZE		1 OF 1	A