

4

3


2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

RoHS

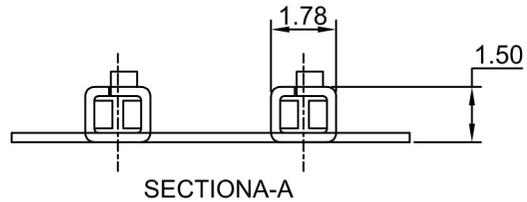

0G: GOLD PLATED

◆ FOR 2806 SERIES HOUSING

◆ SPECIFICATIONS

VOLTAGE RATING: 250 V AC DC

CURRENT RATING: 2 AMP

DIELECTRIC WITHSTANDING VOLTAGE:

AC 1,000 V FOR 1 MINUTE

INSULATION RESISTANCE: $\geq 500 \text{ M}\Omega$

◆ ENVIRONMENTAL

TEMPERATURE RANGE: $-20^{\circ}\text{C}\sim+85^{\circ}\text{C}$

◆ PART NO.

2806S - 15K - 0G - F


SERIES NO.

FEMALE

15K/REEL

0G: GOLD PLATED

OTHER PLATINGS ON REQUEST

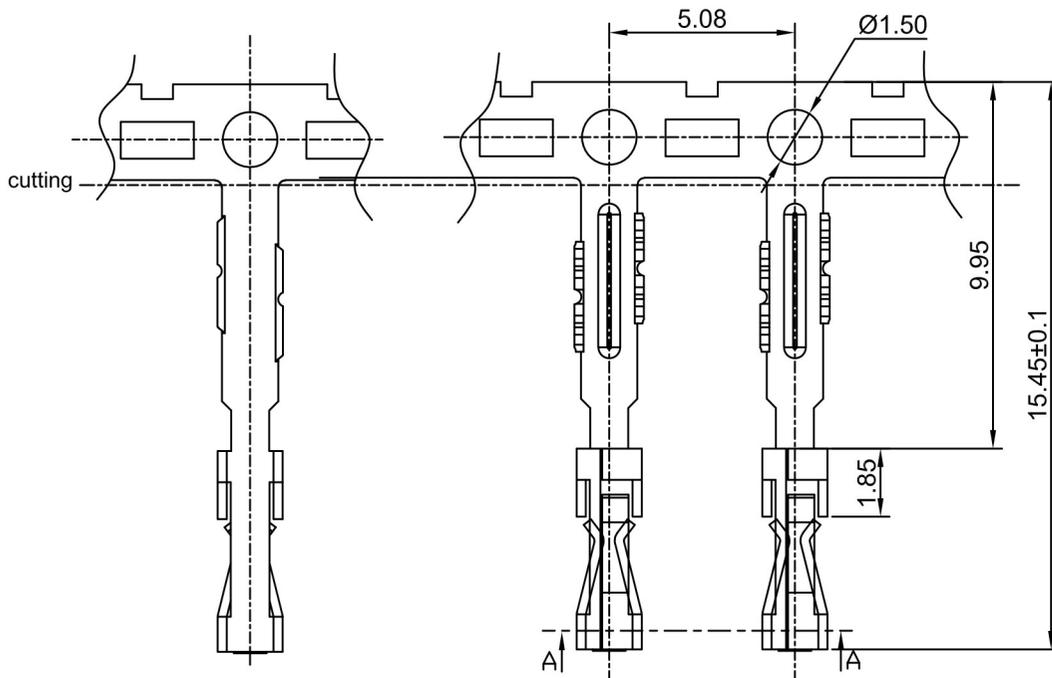

				X. ± 0.20
				.X ± 0.10
				.XX ± 0.05
A	FIRST DRAWING	MARY	2013.05.13	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2013.05.13	PRODUCT NAME/品名			
CHECK BY/審查	DATE/日期	5.08mm PITCH FFC/FPC CONNECTOR			
VIVIAN	2013.05.13	PART NO./料號	SCALE/比例	SIZE/圖號	UNIT/單位
APPROVED BY/核准	DATE/日期	2806S-15K-0G-F	4:1	A4	mm
JASON	2013.05.13	MATERIAL/材質	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PACKAGE/包裝	15.000PCS/REEL	PHOSPHOR BRONZE		1 OF 1	A