
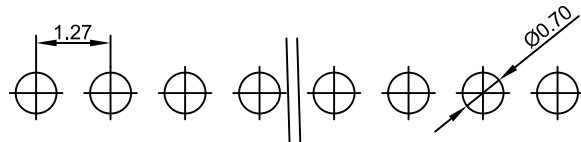
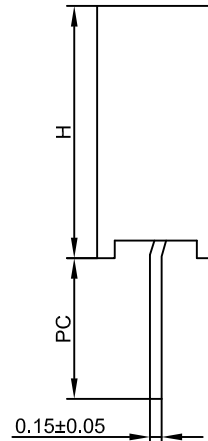
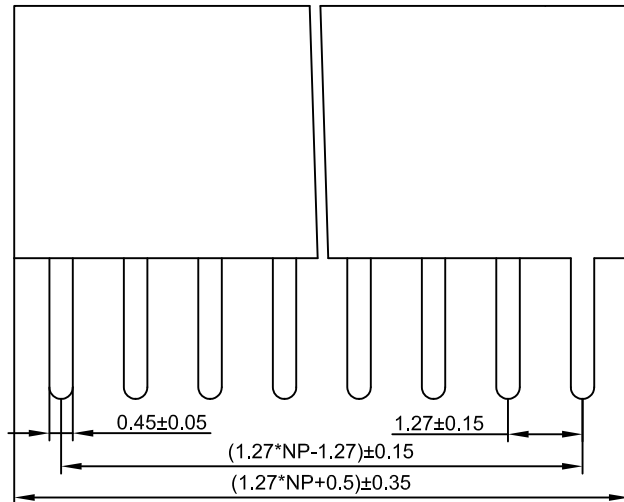


CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

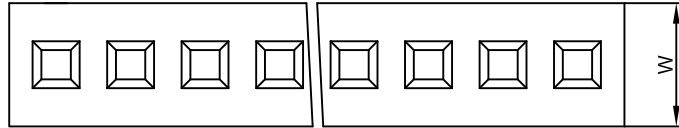

PCB LAYOUT

◆ Specifications

- 1.Current Rating:1Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Soldering Temperature:+265℃,10s max
- 7.Contact Material: Phosphor bronze
- 8.Insulation Material:As follows
- 9.Plated:As follows

◆ PART NO.

L303		XX	-XX	0	X	X	XX	X
1.27mm single row	PLASTIC HEIGHT H*W	PIN NO.	0=180° 1=90°	MATERIAL	PLATED	SERIES NO.	PACKAGE	
20=2.0*2.0	01~50	1=PBT	2=SMT	3、NY6T	0、Au0.8u"	01~69:Without a column	A=bag	
34=3.4*1.8		4、LCP		5、NY66	1、Au1u"	70~89:With inside column	B=tubes	
43=4.3*1.8		7、NY46		8、NY9T	2、Au1.5u"	90~99:With outside column	C=tray	
		8、NY9T			3、Au2u"		D=reel	
		9、Matte-Tin			4、Au3u"			
					5、Au5u"			
					6、Au10u"			
					7、Selective gold			
					8、Tin			
					9、Matte-Tin			

				LINER	ANGLES
				.0 ±0.3	0.° ±2.0°
A	FIRST DRAWING	MARY	2017.08.19	.00 ±0.2	.0° ±1.0°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	.000 ±0.1	.00° ±0.5°
				TOLERANCE RANGE/公差範圍	

DRAWN/繪圖	DATE/日期	CROWN LINK [®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2017.08.19	PRODUCT NAME/品名			
CHECK BY/審查	DATE/日期	PH1.27*H 1XNP 180° SINGLE ROW FEMALE HEADER U-TYPE			
VIVIAN	2017.08.19	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
APPROVED BY/核准	DATE/日期	L303XX-XX0XXXXX	01-50P		A4
WENDY	2017.08.19	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	UNIT/單位
PACKAGE/包裝			BLACK COLOR	⊕	mm
					SHEET/頁碼
					1 OF 1
					REV/版本
					A