
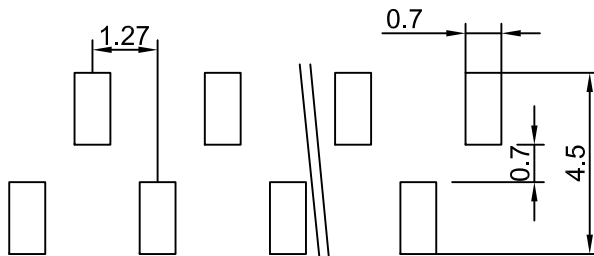

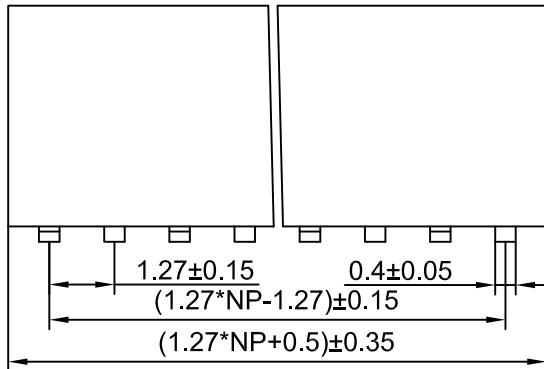


CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

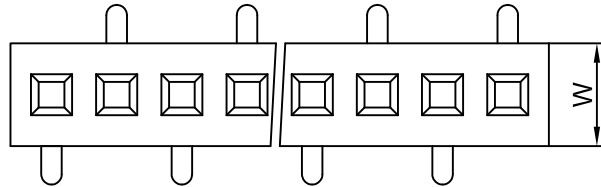

PCB LAYOUT

◆ Specifications

- 1.Current Rating:1Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25 ℃to+85 ℃
- 6.Contact Material: Phosphor bronze
- 7.Insulation Material:As follows
- 8.Plated: As follows

◆ PART NO.

L303		XX	-	XX	2	X	X	XX	X
1.27mm single row	PLASTIC HEIGHT H*W	PIN NO.	0=180° 1=90°	MATERIAL	PLATED	SERIES NO.	PACKAGE		
	20=2.0*2.0 34=3.4*1.8 43=4.3*1.8	01~50	2=SMT	1、PBT 3、NY6T 4、LCP 5、NY66 7、NY46 8、NY9T	0、Au0.8u" 1、Au1u" 2、Au1.5u" 3、Au2u" 4、Au3u" 5、Au5u" 6、Au10u" 7、Selective gold 8、Tin 9、Matte-Tin	01~69:Without a column 70~89:With inside column 90~99:With outside column	A=bag B=lubes C=tray D=reel		

				LINER	ANGLES
				.0 ±0.3	0.° ±2.0°
A	FIRST DRAWING	MARY	2017.08.21	.00 ±0.2	.0° ±1.0°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	.000 ±0.1	.00° ±0.5°
				TOLERANCE RANGE/公差範圍	

DRAWN/繪圖	DATE/日期	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2017.08.21	PRODUCT NAME/品名			
CHECK BY/審查	DATE/日期	PH1.27*H 1XNP SMT SINGLE ROW FEMALE HEADER TYPE-U 一前二后			
VIVIAN	2017.08.21	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
APPROVED BY/核准	DATE/日期	L303XX-XX2XXXXX	01-50P		A4
WENDY	2017.08.21	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼
PACKAGE/包裝			BLACK COLOR		1 OF 1
					REV/版本
					A