
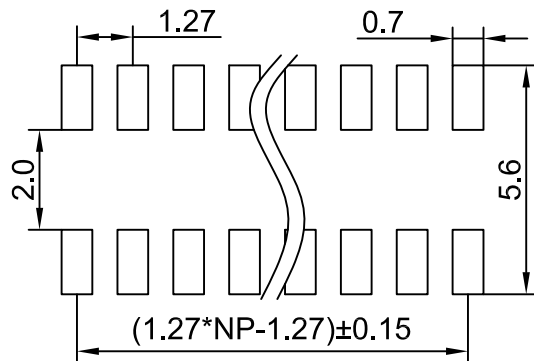
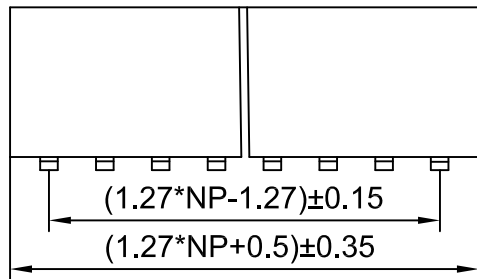

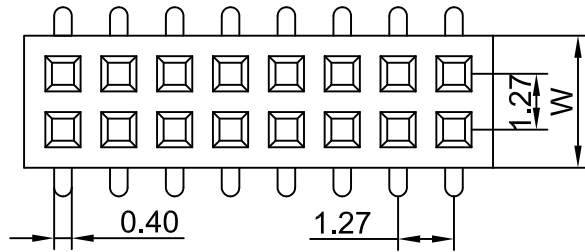


CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS



PCB LAYOUT

◆ Specifications

- 1.Current Rating:1Amps
- 2.Insulator Resistance:1000 Megohms min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material: Phosphor bronze
- 7.Insulator Material:As follows
- 8.Plated: As follows

◆ PART NO.

L304	XX	-XX	2	X	X	XX	X
1.27mm double row	PLASTIC HEIGHT	PIN NO.	0=180°	MATERIAL	PLATED	SERIES NO.	PACKAGE
H*W	01~50	1=90°	1、PBT	0、Au0.8u"	01~69\Without a column	A=bag	
20=2.0*3.0	2=SMT	3、NY6T	1、Au1u"	70~88\With inside column	B=tubes		
34=3.4*3.0	4、LCP	2、Au1.5u"	90~99\With outside column	C=tray			
43=4.3*3.0	5、NY66	3、Au2u"	D=reel				
	7、NY46	4、Au3u"					
	8、NY9T	5、Au5u"					
		6、Au10u"					
		7、Selective gold					
		8、Tin					
		9、Matte-Tin					

				LINER	ANGLES
				.0 ±0.3	0.° ±2.0°
A	FIRST DRAWING	MARY	2017.08.21	.00 ±0.2	.0° ±1.0°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	.000 ±0.1	.00° ±0.5°
				TOLERANCE RANGE/公差範圍	

DRAWN/繪圖	DATE/日期
MARY	2017.08.21
CHECK BY/審查	DATE/日期
VIVIAN	2017.08.21
APPROVED BY/核准	DATE/日期
WENDY	2017.08.21
PACKAGE/包裝	

CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
PRODUCT NAME/品名				
PH1.27*H 2XNP SMT DOUBLE ROW FEMALE HEADER TYPE-U				
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
L304XX-XX2XXXXX	02-100P		A4	mm
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
	BLACK COLOR		1 OF 1	A