

4

3




2

1

# CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

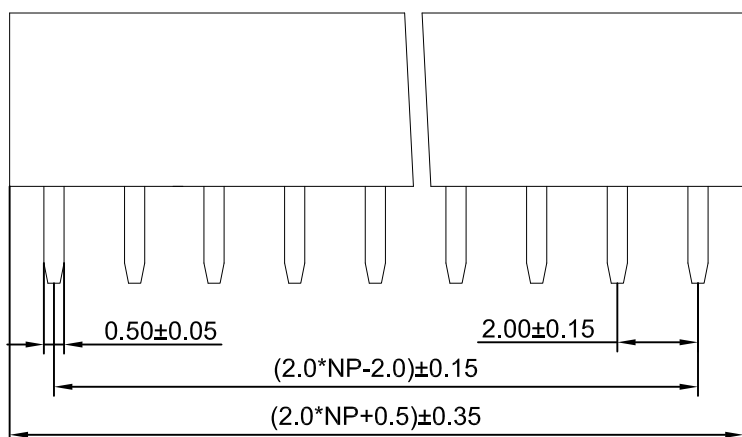


### ◆ Specifications

- 1.Current Rating:2Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25°C to+85°C
- 6.Contact Material: Phosphor bronze
- 7.Insulation Material:As follows
- 8.Plated: As follows

### ◆ PART NO.

L305 XX -XX 0 X X XX X

2.0mm single row	PLASTIC HEIGHT H*W	PIN NO. 01~40	0=180° 1=90° 2=SMT	MATERIAL 1、PBT 3、NY6T 4、LCP 5、NY66 7、NY46 8、NY9T	PLATED 0、Au0.8u" 1、Au1u" 2、Au1.5u" 3、Au2u" 4、Au3u" 5、Au5u" 6、Au10u" 7、Selective gold 8、Tin 9、Matte-Tin	SERIES NO. 01~69:Without a column 70~89:With inside column 90~99:With outside column	PACKAGE A=bag B=tubes C=tray D=reel
40=4.0*2.4	43=4.3*2.4	46=4.6*2.4	63=6.35*2.0				

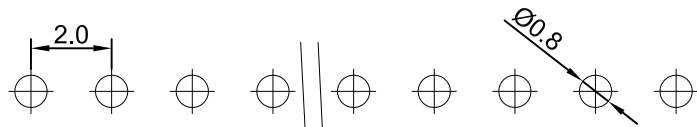

PCB LAYOUT

				LINER .0 ±0.3	ANGLES 0.° ±2°
A	FIRST DRAWING	MARY	2017.08.24	.00 ±0.2	.0° ±1°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	.000 ±0.1	.00° ±0.5°
				TOLERANCE RANGE/公差範圍	

DRAWN/繪圖	DATE/日期
MARY	2017.08.24
CHECK BY/審查	DATE/日期
VIVIAN	2017.08.24
APPROVED BY/核准	DATE/日期
WENDY	2017.08.24
PACKAGE/包裝	

<b>THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>					
PRODUCT NAME/品名					
PH2.0*H 1XNP 180° SINGLE ROW FEMALE HEADER TYPE-U					
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位	
L305XX-XX0XXXXX	01-40P		A4	mm	
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本	
	BLACK COLOR		1 OF 1	A	

D

D

C

C

B

B

A

A