

4

3






2

1

# CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

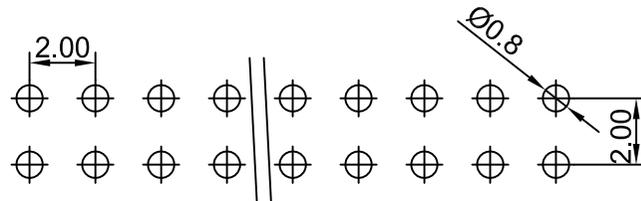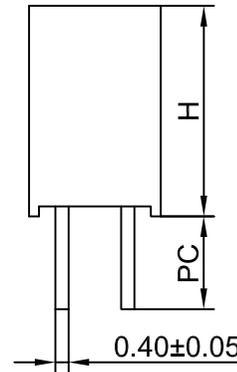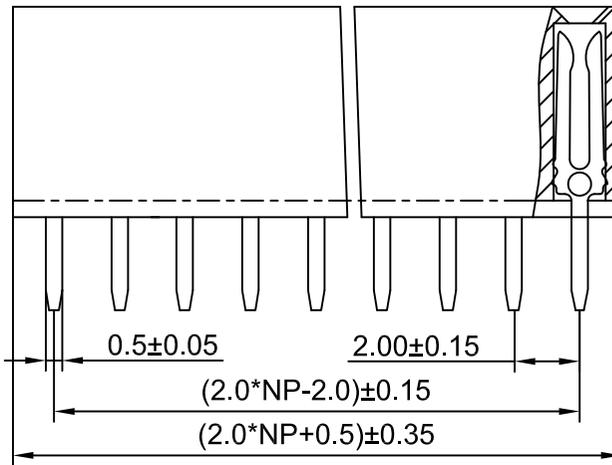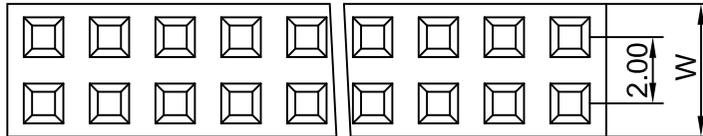

PCB LAYOUT

### ◆ Specifications

- 1.Current Rating:2Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material: Brass
- 7.Insulation Material:As follows
- 8.Plated: As follows

### ◆ PART NO.

L306	XX	-XX	0	X	X	XX	X
2.0mm double row	PLASTIC HEIGHT H*W	PIN NO. 01~40	0=180° 1=90° 2=SMT	MATERIAL 1、PBT 3、NY6T 4、LCP 5、NY66 7、NY46 8、NY9T	PLATED 0、Au0.8u" 1、Au1u" 2、Au1.5u" 3、Au2u" 4、Au3u" 5、Au5u" 6、Au10u" 7、Selective gold 8、Tin 9、Matte-Tin	SERIES NO. 01~68:Without a column 70~89:With inside column 90~98:With outside column	PACKAGE A=bag B=tubes C=tray D=reel
20=2.0*4.0							
40=4.0*4.0							
40=4.0*4.5							
43=4.3*4.0							
43=4.3*4.5							
46=4.6*4.0							
46=4.6*4.5							
52=5.2*4.8							
63=6.35*4.0							

D

D

C

C

B

B

A

A

				LINER	ANGLES
				.0 ±0.3	0.° ±3°
A	FIRST DRAWING	MARY	2017.08.24	.00 ±0.2	.0° ±2°
				.000 ±0.1	.00° ±1°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍	

DRAWN/繪圖	DATE/日期	<b>CROWN LINK® THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>			
MARY	2017.08.24	PRODUCT NAME/品名			
CHECK BY/審查	DATE/日期	PH2.0*H 2XNP 180° DOUBLE ROW FEMALE HEADER TYPE-Y			
VIVIAN	2017.08.24	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
APPROVED BY/核准	DATE/日期	L306XX-XX0XXXXX	02P-80P		A4
WENDY	2017.08.24	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼
PACKAGE/包裝			BLACK COLOR		1 OF 1
					REV/版本
					A