


CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

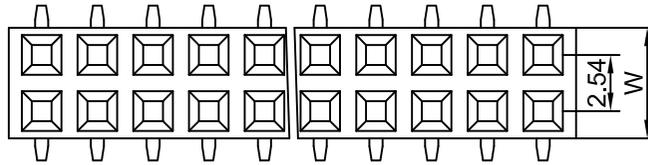



◆ Specifications

- 1.Current Rating:3Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material:Phosphor bronze
- 7.Insulation Material:As follows
- 8.Plated: As follows

◆ PART NO.

L308 XX -XX 2 X X XX X

2.54mm double row	PLASTIC HEIGHT HW	PIN NO. 1~40	0=180° 1=90° 2=SMT	MATERIAL	PLATED	SERIES NO.	PACKAGE
	50=5.0*5.2			1. PBT	0. Au0.8u"	01~69:Without a column	A=bag
	57=5.7*5.0			3. NY6T	1. Au1u"	70~89:With inside column	B=tubes
	71=7.1*5.0			4. LCP	2. Au1.5u"	90~99:With outside column	C=tray
	85=8.5*5.0			5. NY66	3. Au2u"		D=reel
				7. NY46	4. Au3u"		
				8. NY9T	5. Au5u"		
					6. Au10u"		
					7. Selective gold		
					8. Tin		
					9. Matte-Tin		

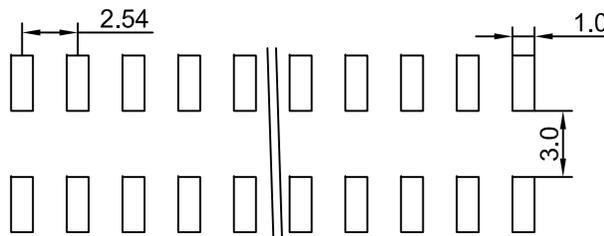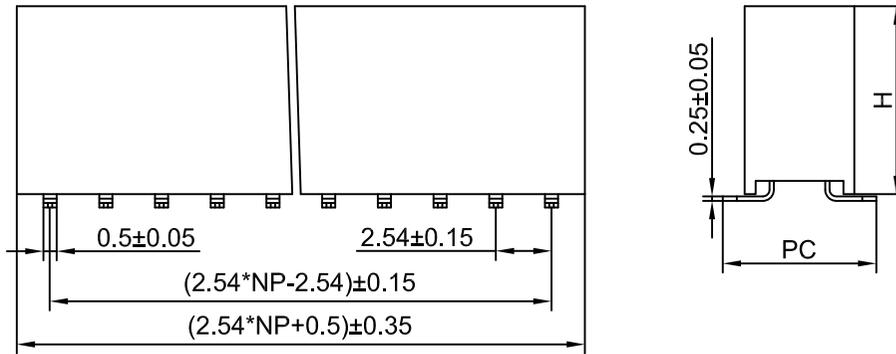

PCB LAYOUT

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	MARY	2017.08.24	0.00 ±0.20 0.0° ±1°
				0.00 ±0.30 0.0° ±2°

CHECK BY/審查	DATE/日期	CROWN LINK [®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
MARY	2017.08.24	PRODUCT NAME/品名 PH2.54*H 2xNP SMT DOUBLE ROW FEMALE HEADER TYPE-U				
VIVIAN	2017.08.24	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
WENDY	2017.08.24	L308XX-XX2XXXXX	02P-80P		A4	mm
		PACKAGE/包裝	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼
				BLACK COLOR		1 OF 1
						REV/版本 A

D

D

C

C

B

B

A

A