

4

3





2

1

# CROWN LINK<sup>®</sup>

專業薄膜開關連接器第一品牌

ROHS

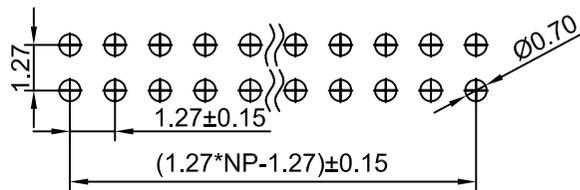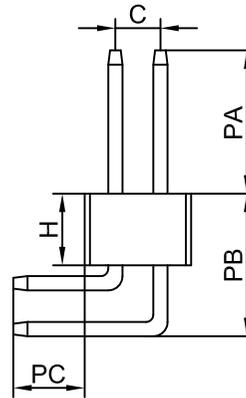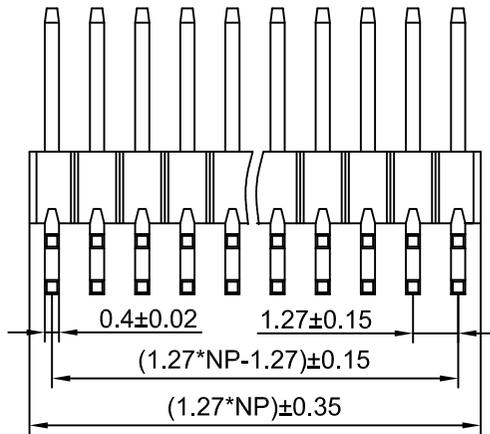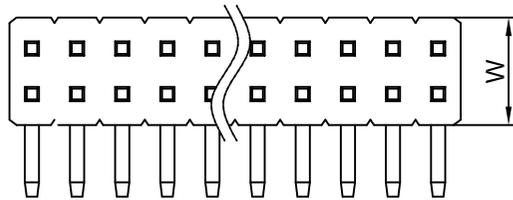

PCB LAYOUT

### ◆ Specifications

- 1.Current Rating:1Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:20 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material: Brass
- 7.Insulation Material:As follows
- 8.Plated: As follows

### ◆ PART NO.

L204 XX -XX 1 X X XX X

1.27mm double row	PLASTIC HEIGHT H*W	PIN NO. 01~50	0=180° 1=90° 2=SMT	MATERIAL PLATED	PLATED	SERIES NO. 01~69:Without a column 70~99:With inside column	PACKAGE
06=0.65*3.4	10=1.0*3.4	15=1.5*3.4	16=1.65*3.0	17=1.7*3.0	20=2.0*3.0	25=2.54*3.0	A=bag B=tubes C=tray D=reel
				1. PBT 3. NY6T 4. LCP 5. NY66 7. NY46 8. NY9T	0. Au0.8u" 1. Au1u" 2. Au1.5u" 3. Au2u" 4. Au3u" 5. Au5u" 6. Au10u" 7. Selective gold 8. Tin 9. Matte-Tin		

A

				LINER	ANGLES
				.0 ±0.3	0.° ±2.0°
A	FIRST DRAWING	MARY	2017.08.16	.00 ±0.2	.0° ±1.0°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	.000 ±0.1	.00° ±0.5°
				TOLERANCE RANGE/公差範圍	

DRAWN/繪圖	DATE/日期	CROWN LINK <sup>®</sup> THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2017.08.16	PRODUCT NAME/品名			
CHECK BY/審查	DATE/日期	PH1.27*H 2*NP 90° DOUBLE ROW PIN HEADER			
VIVIAN	2017.08.16	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
APPROVED BY/核准	DATE/日期	L204XX-XX1XXXXX	02P-100P		A4 mm
WENDY	2017.08.16	PACKAGE/包裝	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角
				BLACK COLOR	SHEET/頁碼
					1 OF 1
					REV/版本
					A

A