
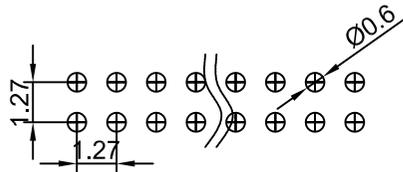
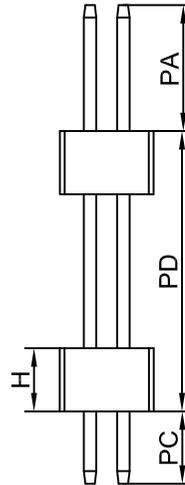
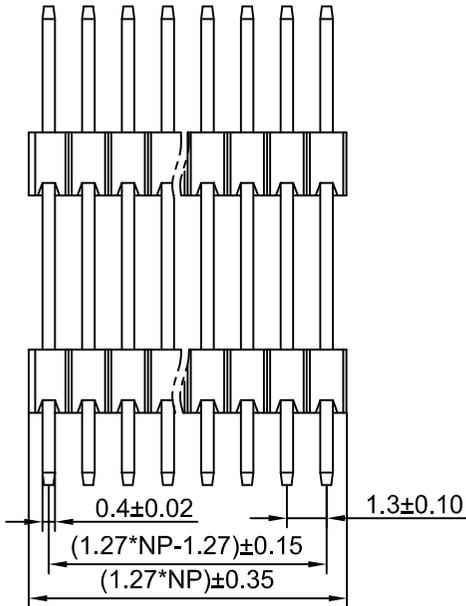


CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS



PCB LAYOUT

◆ Specifications

- 1.Current Rating:1Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25°C to+85°C
- 6.Contact Material: Brass
- 7.Insulation Material:As follows
- 8.Plated: As follows

◆ PART NO.

L204 XX -XX 0 X X XX X

1.27mm double row	PLASTIC HEIGHT H*W	PIN NO. 1~50	0=180° 1=90° 2=SMT	MATERIAL 1、PBT 3、NY6T 5、NY66 7、NY46 8、NY9T	PLATED 0、Au0.8u" 1、Au1u" 2、Au1.5u" 3、Au2u" 4、Au3u" 5、Au5u" 6、Au10u" 7、Selective gold 8、Tin 9、Matte-Tin	SERIES NO. 01~69:Without a column 70~99:With inside column	PACKAGE A=bag B=tubes C=tray D=reel
06=0.65*3.4	10=1.0*3.4	15=1.5*3.4	17=1.7*3.0	20=2.0*3.0	25=2.54*3.0	25=2.54*5.0	

				LINER .0 ±0.30	ANGLES 0.° ±3°
A	FIRST DRAWING	MARY	2017.08.31	.00 ±0.20	.0° ±2°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	.000 ±0.10	.00° ±1°
				TOLERANCE RANGE/公差範圍	

DRAWN/繪圖 MARY 2017.08.31	DATE/日期 2017.08.31	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
CHECK BY/審查 VIVIAN 2017.08.31	DATE/日期 2017.08.31	PRODUCT NAME/品名 PH1.27*H 2*NP 180° DOUBLE ROW DOUBLE PLASTIC PIN HEADER				
APPROVED BY/核准 WENDY 2017.08.31	DATE/日期 2017.08.31	PART NO./料號 L204XX-XX0XXXXX	PIN NUMBER/針數 02P-100P	SCALE/比例	SIZE/圖號 A4	UNIT/單位 mm
PACKAGE/包裝		MATERIAL/材質 BLACK COLOR	COLOR/顏色	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 A