

4

3




2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

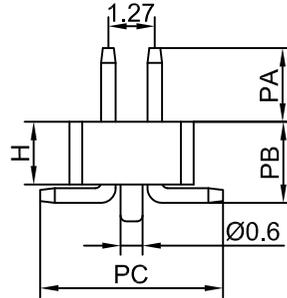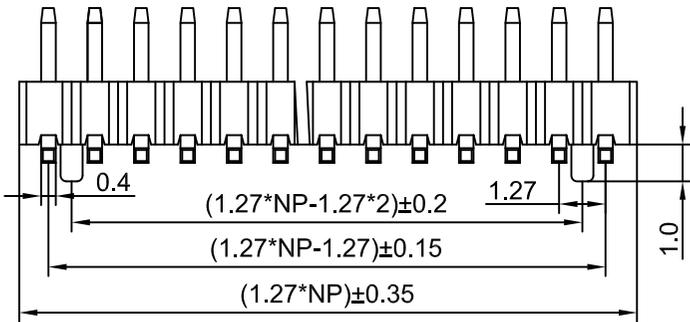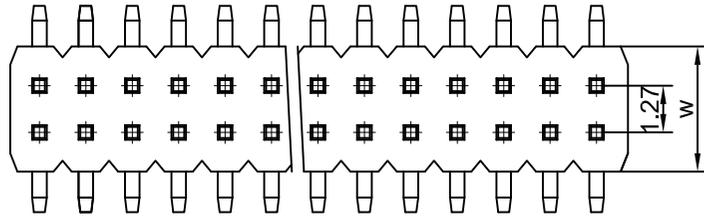


◆ Specifications

- 1.Current Rating:1Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material: Brass
- 7.Insulation Material:As follows
- 8.Plated: As follows

◆ PART NO.

L204 XX -XX 2 X X XX X

1.27mm double row	PLASTIC HEIGHT H*W	PIN NO. 1~50	0=180° 1=90° 2=SMT	MATERIAL 1、PBT 3、NY6T 4、LCP 5、NY66 7、NY46 8、NY9T	PLATED 0、Au0.8u" 1、Au1u" 2、Au1.5u" 3、Au2u" 4、Au3u" 5、Au5u" 6、Au10u" 7、Selective gold 8、Tin 9、Matte-Tin	SERIES NO. 01~69:Without a column 70~99:With inside column	PACKAGE A=bag B=tubes C=tray D=reel
06=0.65*3.4	10=1.0*3.4	15=1.5*3.4	17=1.7*3.0	20=2.0*3.0	25=2.54*3.0		

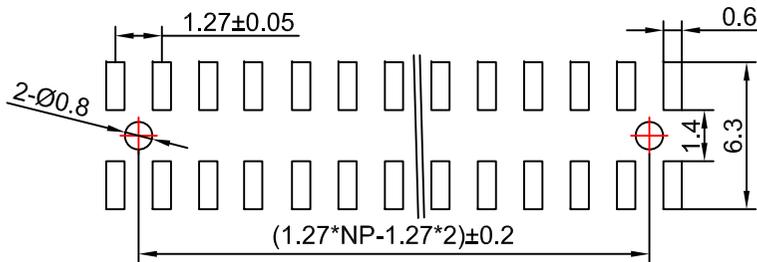

PCB LAYOUT

				LINER	ANGLES
				.0 ±0.30	0.° ±3°
A	FIRST DRAWING	MARY	2017.08.31	.00 ±0.20	.0° ±2°
				.000 ±0.10	.00° ±1°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍	

DRAWN/繪圖	DATE/日期	CROWN LINK [®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
MARY	2017.08.31	PRODUCT NAME/品名				
CHECK BY/審查	DATE/日期	PH1.27*H 2*NP SMT DOUBLE ROW WITH COLUMN PIN HEADER				
VIVIAN	2017.08.31	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
APPROVED BY/核准	DATE/日期	L204XX-XX2XXXXX	02P-100P		A4	mm
WENDY	2017.08.31	PACKAGE/包裝		MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角
				BLACK COLOR		SHEET/頁碼
						1 OF 1
						REV/版本
						A

D

D

C

C

B

B

A

A