


# CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

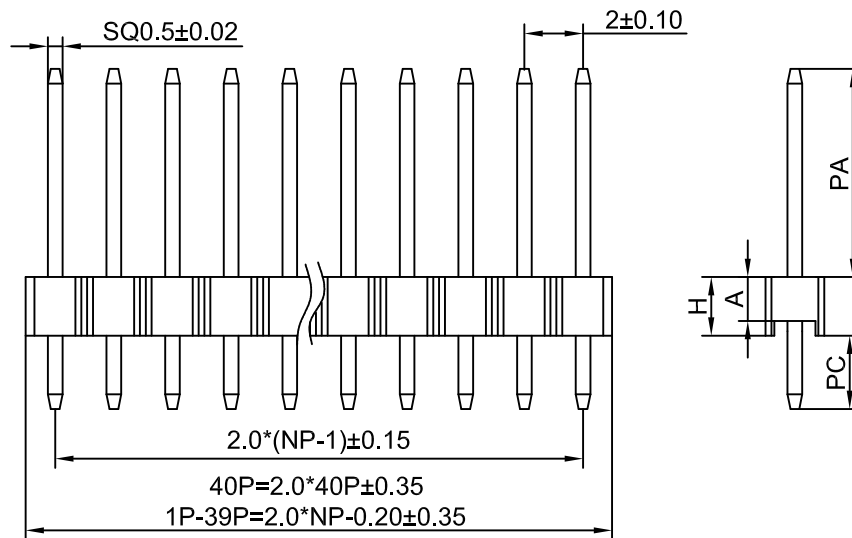

### ◆ Specifications

1. Current Rating: 2Amps
2. Insulation Resistance: 1000 MΩ min
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 30 mΩ max
5. Operating Temperature: -25°C to +85°C
6. Contact Material: Brass
7. Insulation Material: As follows
8. Plated: As follows

### ◆ PART NO.

L205 XX -XX 0 X X XX X

2.0mm single row	PLASTIC HEIGHT	PIN NO.	0=180°	MATERIAL	PLATED	SERIES NO.	PACKAGE
	H*W	1~40	1=90°	1、PBT	0、Au0.8u"	01~69:Without a column	A=bag
	15=1.5*2.0		2=SMT	3、NY6T	1、Au1u"	70~99:With inside column	B=tubes
	20=2.0*2.0			4、LCP	2、Au1.5u"		C=tray
				5、NY66	3、Au2u"		D=reel
				7、NY46	4、Au3u"		
				8、NY9T	5、Au5u"		
					6、Au10u"		
					7、Selective gold		
					8、Tin		
					9、Matte-Tin		

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	MARY	2017.08.31	

DRAWN/繪圖	DATE/日期	THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2017.08.31				
CHECK BY/審查	DATE/日期	PRODUCT NAME/品名			
VIVIAN	2017.08.31	PH2.0*H 1xNP 180° SINGLE ROW PIN HEADER			
APPROVED BY/核准	DATE/日期	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
WENDY	2017.08.31	L205XX-XX0XXXXX	01P-40P		A4
PACKAGE/包裝		MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼
			BLACK COLOR		1 OF 1
					REV/版本
					A