

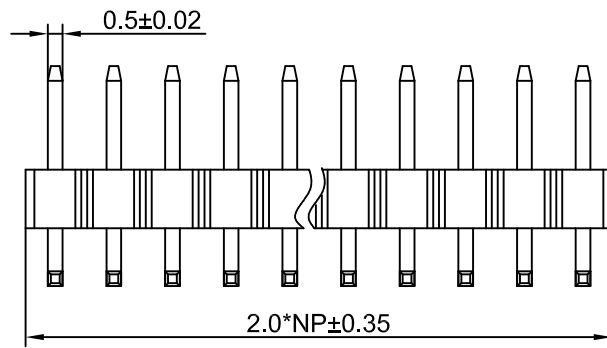


CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

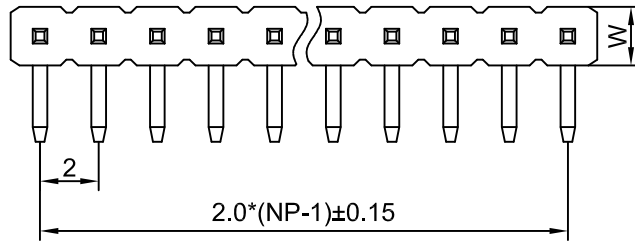


◆ Specifications

1. Current Rating: 2Amps
2. Insulation Resistance: 1000 MΩ min
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 30 mΩ max
5. Operating Temperature: -25°C to +85°C
6. Contact Material: Brass
7. Insulation Material: As follows
8. Plated: As follows

◆ PART NO.

L205 XX -XX 1 X X XX X

2.0mm single row	PLASTIC HEIGHT	PIN NO.	0=180°	MATERIAL	PLATED	SERIES NO.	PACKAGE
H*W	1~40	1=90°	1. PBT	0. Au0.8u"	01~69: Without a column	A=bag	
15=1.5*2.0	2=SMT	2=SMT	3. NY6T	1. Au1u"	70~99: With inside column	B=tubes	
20=2.0*2.0			4. LCP	2. Au1.5u"		C=tray	
			5. NY66	3. Au2u"		D=reel	
			7. NY46	4. Au3u"			
			8. NY9T	5. Au5u"			
				6. Au10u"			
				7. Selective gold			
				8. Tin			
				9. Matte-Tin			

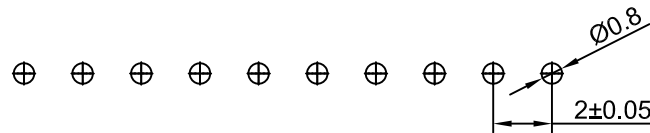

PCB LAYOUT

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	MARY	2017.08.31	LINER ANGLES .0 ±0.30 0.° ±3° .00 ±0.20 .0° ±2° .000 ±0.10 .00° ±1°

DRAWN/繪圖	DATE/日期	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2017.08.31	PRODUCT NAME/品名 PH2.0*H 1xNP 90° SINGLE ROW PIN HEADER			
CHECK BY/審查	DATE/日期	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
VIVIAN	2017.08.31	L205XX-XX1XXXXX	01P-40P		A4
APPROVED BY/核准	DATE/日期	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼
WENDY	2017.08.31		BLACK COLOR	⊕	1 OF 1
PACKAGE/包裝					REV/版本 A