

4

3





2

1

# CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

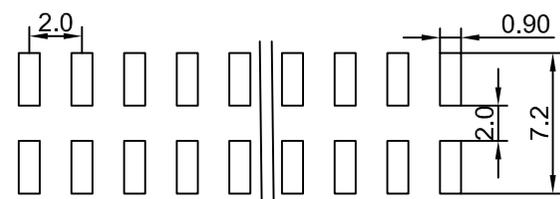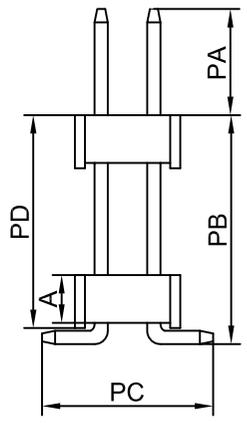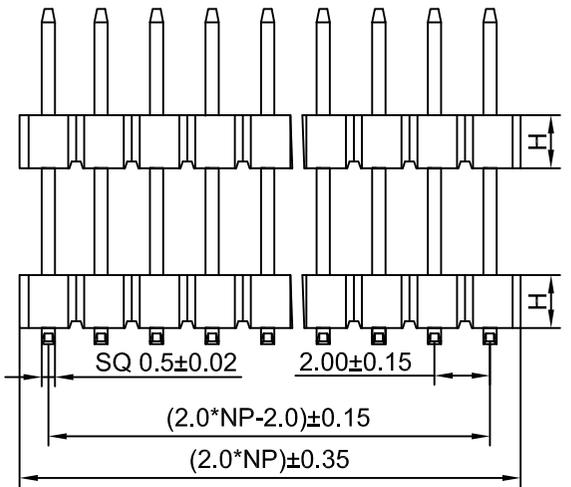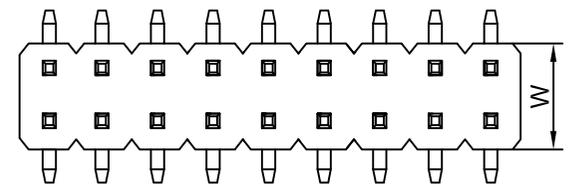

PCB LAYOUT

### ◆ Specifications

- 1.Current Rating:2Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material: Brass
- 7.Insulation Material:As follows
- 8.Plated: As follows

### ◆ PART NO.

L206 XX -XX 2 X X XX X

2.0mm double row	PLASTIC HEIGHT	PIN NO.	0=180°	MATERIAL	PLATED	SERIES NO.	PACKAGE
H*W	1~40	1=90°	1. PBT	0. Au0.8u"	01~69/Without a column	A=bag	
10=1.0*4.0	2=SMT	3. NY6T	1. Au1u"	70~99/With inside column	B=tubes		
15=1.5*4.0	4. LCP	2. Au1.5u"			C=tray		
20=2.0*4.0	5. NY66	3. Au2u"			D=reel		
	7. NY46	4. Au3u"					
	8. NY9T	5. Au5u"					
		6. Au10u"					
		7. Selective gold					
		8. Tin					
		9. Matte-Tin					

A

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	MARY	2017.08.31	LINER .0 ±0.30 ANGLES 0.° ±3°
				.00 ±0.20 .0° ±2°
				.000 ±0.10 .00° ±1°

DRAWN/繪圖	DATE/日期
MARY	2017.08.31
CHECK BY/審查	DATE/日期
VIVIAN	2017.08.31
APPROVED BY/核准	DATE/日期
WENDY	2017.08.31
PACKAGE/包裝	

CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
PRODUCT NAME/品名				
PH2.0*H 2xNP SMT DOUBLE ROW DOUBLE PLASTIC PIN HEADER				
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
L206XX-XX2XXXXX	02P-80P		A4	mm
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
	BLACK COLOR		1 OF 1	A