

4

3

2





1

CROWN LINK[®]

專業薄膜開關連接器第一品牌



ROHS

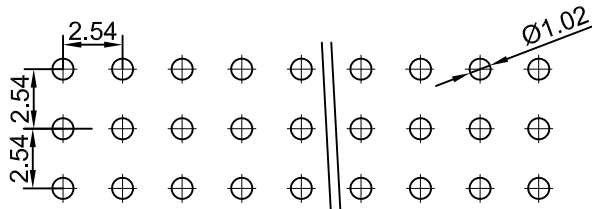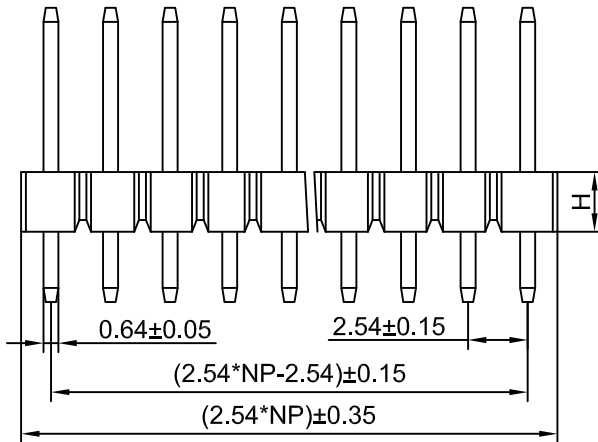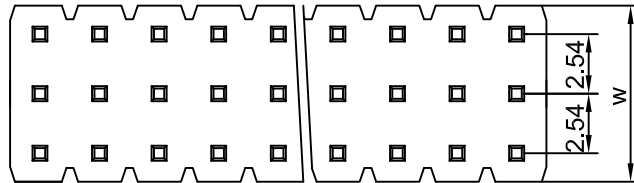

PCB LAYOUT

◆ Specifications

- 1.Current Rating:3Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material: Brass
- 7.Insulation Material:As follows
- 8.Plated: As follows

◆ PART NO.

L209 XX -XX 0 X X XX X

2.54mm three row	PLASTIC HEIGHT H*W 25=2.54*7.5	PIN NO. 1~40	0=180° 1=90° 2=SMT	MATERIAL 1、PBT 3、NY6T 4、LCP 5、NY66 7、NY46 8、NY9T	PLATED 0、Au0.8u" 1、Au1u" 2、Au1.5u" 3、Au2u" 4、Au3u" 5、Au5u" 6、Au10u"	SERIES NO. 01~69*Without a column 70~99*With inside column	PACKAGE A=bag B=tubes C=tray D=reel
------------------	--------------------------------------	-----------------	--------------------------	--	--	--	---

D

C

B

A

D

C

B

A

				LINER	ANGLES
				.0 ±0.30	0.° ±3°
A	FIRST DRAWING	MARY	2017.08.31	.00 ±0.20	.0° ±2°
				.000 ±0.10	.00° ±1°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍	

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2017.08.31	PRODUCT NAME/品名 PH2.54*H 3xNP 180° THREE ROW PIN HEADER			
CHECK BY/審查	DATE/日期	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
VIVIAN	2017.08.31	L209XX-XX0XXXXX	03P-120P		A4
APPROVED BY/核准	DATE/日期	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼
WENDY	2017.08.31		BLACK COLOR		1 OF 1
PACKAGE/包裝					REV/版本 A