

4

3





2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

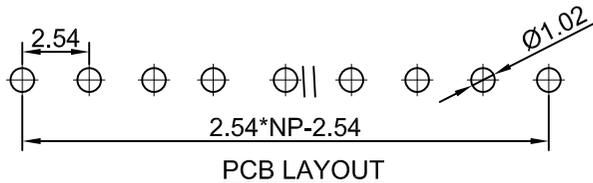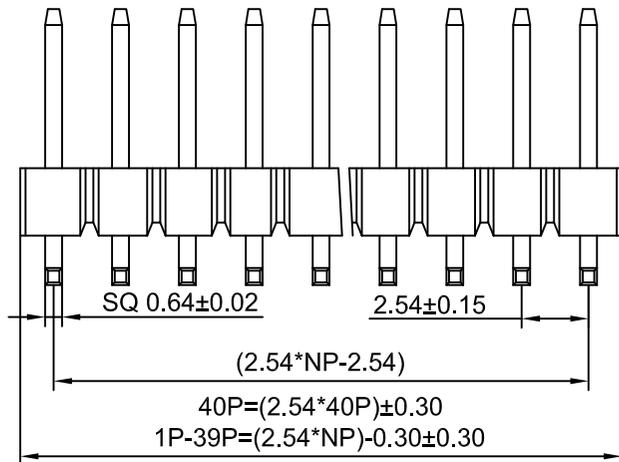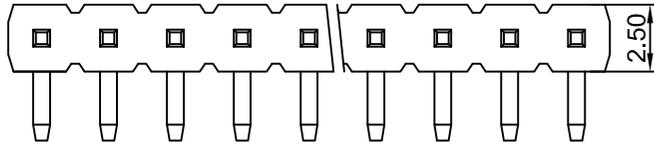

◆ Specifications

1. Current Rating: 3Amps
2. Insulation Resistance: 1000 MΩ min
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 30 mΩ max
5. Operating Temperature: -25°C to +85°C
6. Contact Material: Brass
7. Insulation Material: As follows
8. Plated: As follows

◆ PART NO.

L207 XX-XX 1 X X X X

2.54mm single row	PLASTIC HEIGHT	PIN NO.	0=180°	MATERIAL	PLATED	SERIES NO.	PACKAGE
H*W	01~40	1=90°	1、PBT	0、Au0.8u"	01~69: Without a column	A=bag	
10=1.0*2.5	2=SMT	3、NY6T	1、Au1u"	70~99: With inside column	B=tubes		
15=1.5*2.5	4、LCP	2、Au1.5u"	3、NY66	4、Au3u"	C=tray		
20=2.0*2.5	7、NY46	4、Au3u"	5、NY9T	5、Au5u"	D=reel		
25=2.54*2.5	8、NY9T	6、Au10u"	7、Selective gold	8、Tin			
		8、Au30u"					

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2017.08.16	PRODUCT NAME/品名			
CHECK BY/審查	DATE/日期	PH2.54*H 1xNP 90° SINGLE ROW PIN HEADER			
VIVIAN	2017.08.16	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
APPROVED BY/核准	DATE/日期	L207XX-XX1XXXXX	01P-40P		A4
WENDY	2017.08.16	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	UNIT/單位
PACKAGE/包裝			BLACK COLOR		mm
				SHEET/頁碼	REV/版本
				1 OF 1	A

				LINER	ANGLES
				.0 ±0.30	0.° ±3°
A	FIRST DRAWING	MARY	2017.08.16	.00 ±0.20	.0° ±2°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	.000 ±0.10	.00° ±1°
				TOLERANCE RANGE/公差範圍	