

4

3




2

1

# CROWN LINK<sup>®</sup>

專業薄膜開關連接器第一品牌

ROHS

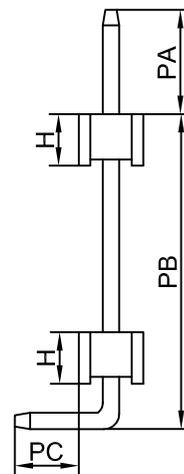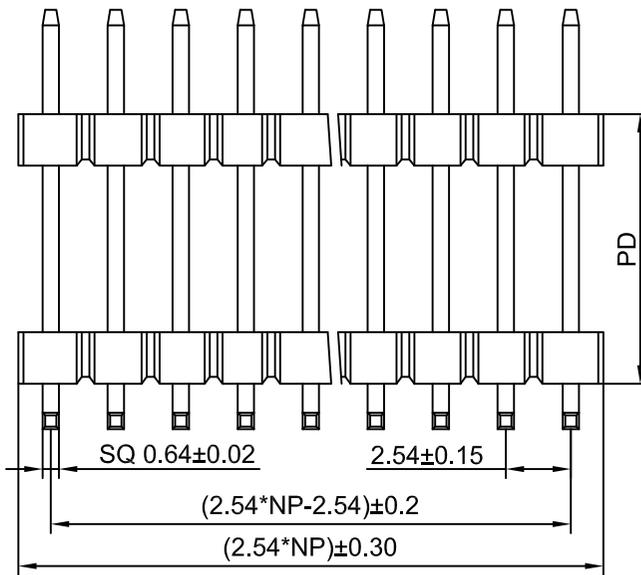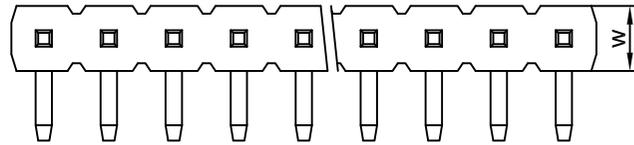

PCB LAYOUT

### ◆ Specifications

- 1.Current Rating:3Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material: Brass
- 7.Insulation Material:As follows
- 8.Plated: As follows

### ◆ PART NO.

L207 XX -XX 1 X X XX X

2.54mm single row	PLASTIC HEIGHT H*W	PIN NO. 1~40	0=180° 1=90° 2=SMT	MATERIAL 1、PBT 3、NY6T 4、LCP 5、NY66 7、NY46 8、NY9T	PLATED 0、Au0.8u" 1、Au1u" 2、Au1.5u" 3、Au2u" 4、Au3u" 5、Au5u" 6、Au10u" 7、Selective gold 8、Tin 9、Matte-Tin	SERIES NO. 01~69:Without a column 70~99:With inside column	PACKAGE A=bag B=tubes C=tray D=reel
10=1.0*2.5	15=1.5*2.5	20=2.0*2.5	25=2.54*2.5				

D

C

B

A

D

C

B

A

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	LINER	ANGLES	TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	MARY	2017.08.31	.0 ±0.30	0.° ±3°	
				.00 ±0.20	.0° ±2°	
				.000 ±0.10	.00° ±1°	

DRAWN/繪圖	DATE/日期	CROWN LINK <sup>®</sup> THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
MARY	2017.08.31	PRODUCT NAME/品名 PH2.54*H 1xNP 90° SINGLE ROW DOUBLE PLASTIC PIN HEADER				
CHECK BY/審查	DATE/日期	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
VIVIAN	2017.08.31	L207XX-XX1XXXXX	01P-40P		A4	mm
APPROVED BY/核准	DATE/日期	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
WENDY	2017.08.31		BLACK COLOR		1 OF 1	A
PACKAGE/包裝						