
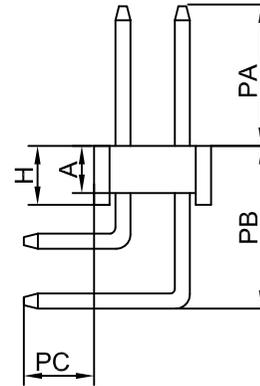
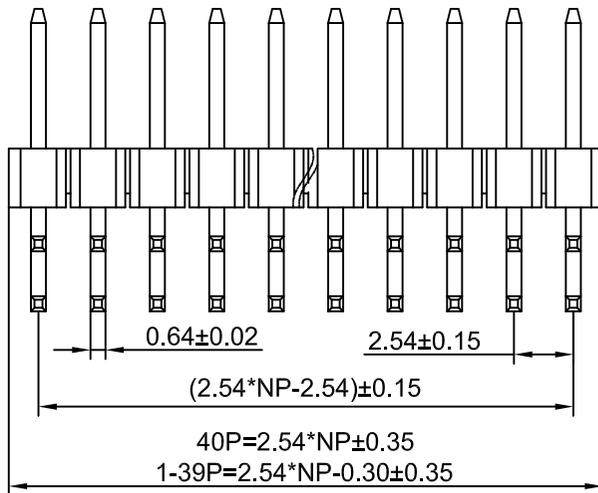


CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

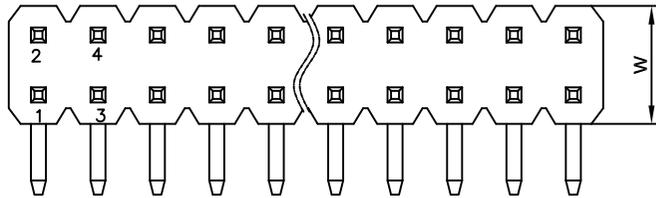


◆ Specifications

- 1.Current Rating:3Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material: Brass
- 7.Insulation Material:As follows
- 8.Plated: As follows

◆ PART NO.

L208 XX -XX 1 X X XX X

2.54mm double row	PLASTIC HEIGHT HW	PIN NO. 01~40	0=180° 1=90° 2=SMT	MATERIAL 1. PBT 3. NY6T 4. LCP 5. NY66 7. NY46 8. NY9T	PLATED 0. Au0.8u" 1. Au1u" 2. Au1.5u" 3. Au2u" 4. Au3u" 5. Au5u" 6. Au10u" 7. Selective gold 8. Tin 9. Matte-Tin	SERIES NO. 01~69:Without a column 70~99:With inside column	PACKAGE A=bag B=tubes C=tray D=reel
15=1.5*5.0	20=2.0*5.0	25=2.54*5.0					

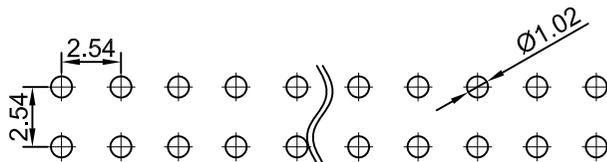

PCB LAYOUT

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	MARY	2017.08.17	LINER ANGLES .0 ±0.30 0.° ±3° .00 ±0.20 .0° ±2° .000 ±0.10 .00° ±1°

DRAWN/繪圖	DATE/日期
MARY	2017.08.17
CHECK BY/審查	DATE/日期
VIVIAN	2017.08.17
APPROVED BY/核准	DATE/日期
WENDY	2017.08.17
PACKAGE/包裝	

CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
PRODUCT NAME/品名 PH2.54*H 2xNP 90° DOUBLE ROW PIN HEADER				
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
L208XX-XX1XXXXX	02P-80P		A4	mm
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
	BLACK COLOR		1 OF 1	A