

4

3





2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

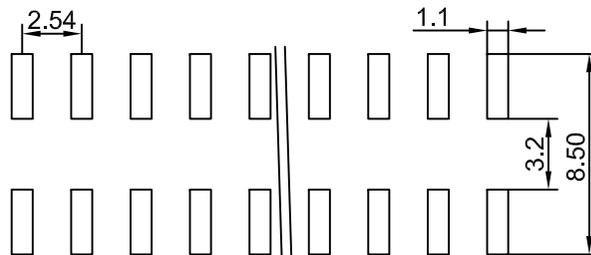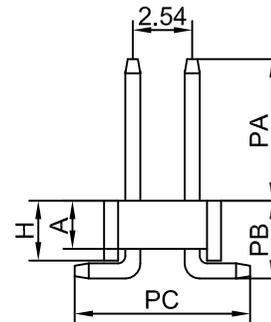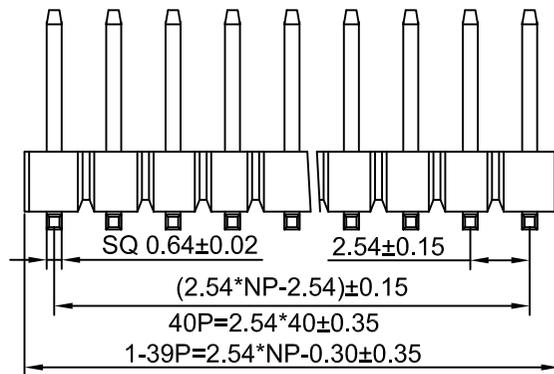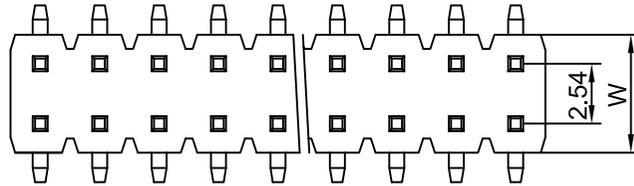

PCB LAYOUT

◆ Specifications

- 1.Current Rating:3Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25°C to+85°C
- 6.Contact Material: Brass
- 7.Insulation Material:As follows
- 8.Plated: As follows

◆ PART NO.

L208	XX	-XX	2	X	X	XX	X
2.54mm double row	PLASTIC HEIGHT	PIN NO.	0=180°	MATERIAL	PLATED	SERIES NO.	PACKAGE
H/W	01~40	1=90°	1. PBT	0. Au0.8u"	01~69:Without a column	A=bag	
15=1.5*5.0		2=SMT	3. NY6T	1. Au1u"	70~99:With inside column	B=tubes	
20=2.0*5.0			4. LCP	2. Au1.5u"		C=tray	
25=2.54*5.0			5. NY66	3. Au2u"		D=reel	
			7. NY46	4. Au3u"			
			8. NY9T	5. Au5u"			
				6. Au10u"			
				7. Selective gold			
				8. Tin			
				9. Matte-Tin			

				LINER	ANGLES
				.0 ±0.30	0.° ±3°
A	FIRST DRAWING	MARY	2017.08.17	.00 ±0.20	.0° ±2°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	.000 ±0.10	.00° ±1°
				TOLERANCE RANGE/公差範圍	

DRAWN/繪圖	DATE/日期	CROWN LINK [®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2017.08.17	PRODUCT NAME/品名			
CHECK BY/審查	DATE/日期	PH2.54*H 2xNP SMT DOUBLE ROW PIN HEADER			
VIVIAN	2017.08.17	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
APPROVED BY/核准	DATE/日期	L208XX-XX2XXXXX	02P-80P		A4
WENDY	2017.08.17	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼
			BLACK COLOR		REV/版本
					1 OF 1
					A