

4

3





2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌

ROHS

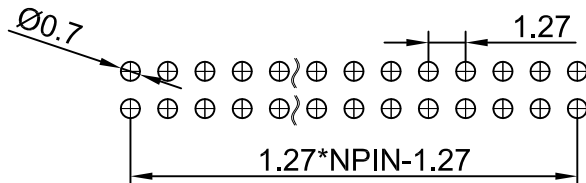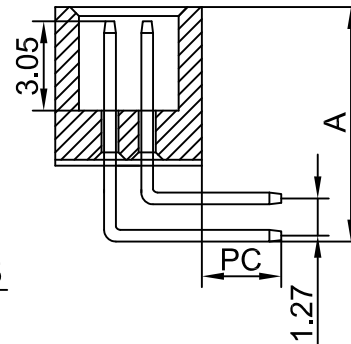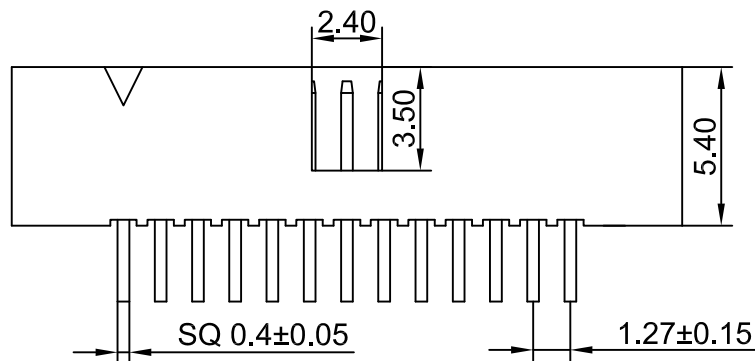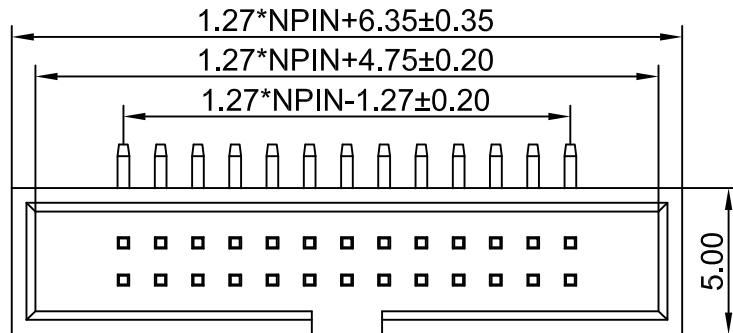

◆ Specifications

- 1.Current Rating:1Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material: Brass
- 7.Insulation Material:As follows
- 8.Plated: As follows

◆ PART NO.

L230 5 4 -XX 1 X X XX X

1.27mm double row	PLASTIC HEIGHT H*W	PIN NO.	0=180° 1=90° 2=SMT	MATERIAL	PLATED	SERIES NO.	PACKAGE
	54=5.4*5.0	10P		1、PBT	0、Au0.8u"	01~69:Without a column	A=bag
		26P		3、NY6T	1、Au1u"	70~99:With inside column	B=tubes
		30P		4、LCP	2、Au1.5u"		C=tray
		40P		5、NY66	3、Au2u"		D=reel
		44P		7、NY46	4、Au3u"		
				8、NY9T	5、Au5u"		
					6、Au10u"		
					7、Selective gold		
					8、Tin		
					9、Matte-Tin		

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
MARY	2018.08.08				
CHECK BY/審查	DATE/日期	PRODUCT NAME/品名			
VIVIAN	2018.08.08	PH1.27X5.4 2XNP 90° DOUBLE ROW BOX HEADER			
APPROVED BY/核准	DATE/日期	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
WENDY	2018.08.08	L23054-XX1XXXXX			A4
PACKAGE/包裝		MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼
			BLACK COLOR		1 OF 1
					UNIT/單位
					mm
					REV/版本
					A

				LINER	ANGLES
				.0 ±0.3	0.° ±2°
A	FIRST DRAWING	MARY	2018.08.08	.00 ±0.2	.0° ±1°
				.000 ±0.1	.00° ±0.5°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍	