

4

3




2

1

# CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

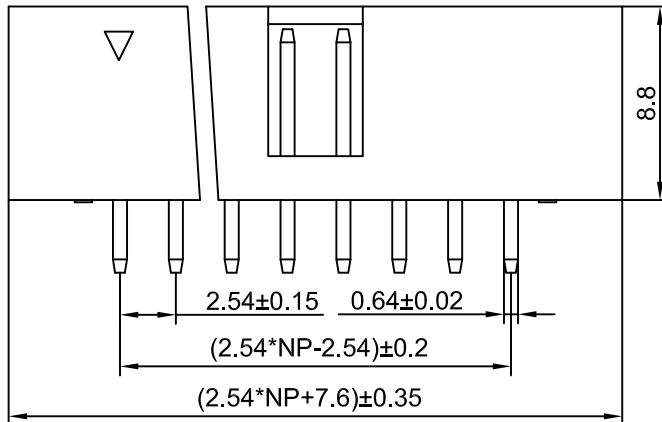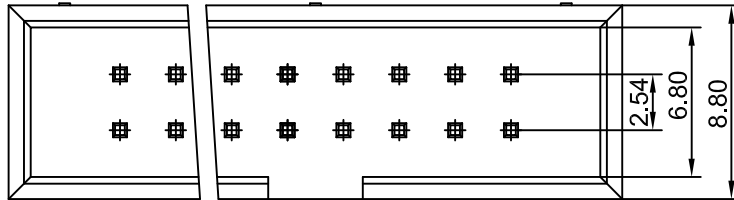


### ◆ Specifications

- 1.Current Rating:3Amps
- 2.Insulation Resistance:1000 MΩ min
- 3.Dielectric withstanding Voltage: AC 500V
- 4.Contact Resistance:30 mΩ max
- 5.Operating Temperature:-25℃ to+85℃
- 6.Contact Material: Brass
- 7.Insulation Material:As follows
- 8.Plated:As follows

### ◆ PART NO.

L232 8 9 -XX 0 X X XX X

2.54mm double row	PLASTIC HEIGHT H*W 89=8.9*8.8	PIN NO. 1~40 1=90° 2=SMT	0=180° 1. PBT 3. NY6T 4. LCP 5. NY66 7. NY46 8. NY9T	MATERIAL 1. Au0.8u" 2. Au1u" 3. Au2u" 4. Au3u" 5. Au5u" 6. Au10u" 7. Selective gold 8. Tin 9. Matte-Tin	PLATED	SERIES NO. 01~68:Without a column 70~99:With inside column	PACKAGE A=bag B=tubes C=tray D=reel
-------------------	-------------------------------------	-----------------------------------	--	--	--------	--	---

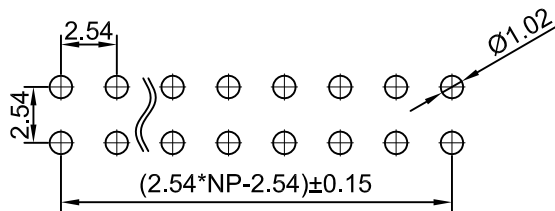

PCB LAYOUT

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
A	FIRST DRAWING	MARY	2017.08.24	LINER .0 ±0.3 ANGLES 0.° ±3° .00 ±0.2 .0° ±2° .000 ±0.1 .00° ±1°

DRAWN/繪圖	DATE/日期
MARY	2017.08.24
CHECK BY/審查	DATE/日期
VIVIAN	2017.08.24
APPROVED BY/核准	DATE/日期
WENDY	2017.08.24
PACKAGE/包裝	

CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
PRODUCT NAME/品名 PH2.54X8.9 2XNP 180° BOX HEADER				
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
L23289-XX0XXXXX	02-80P		A4	mm
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
	BLACK COLOR		1 OF 1	A

D

D

C

C

B

B

A

A