



CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

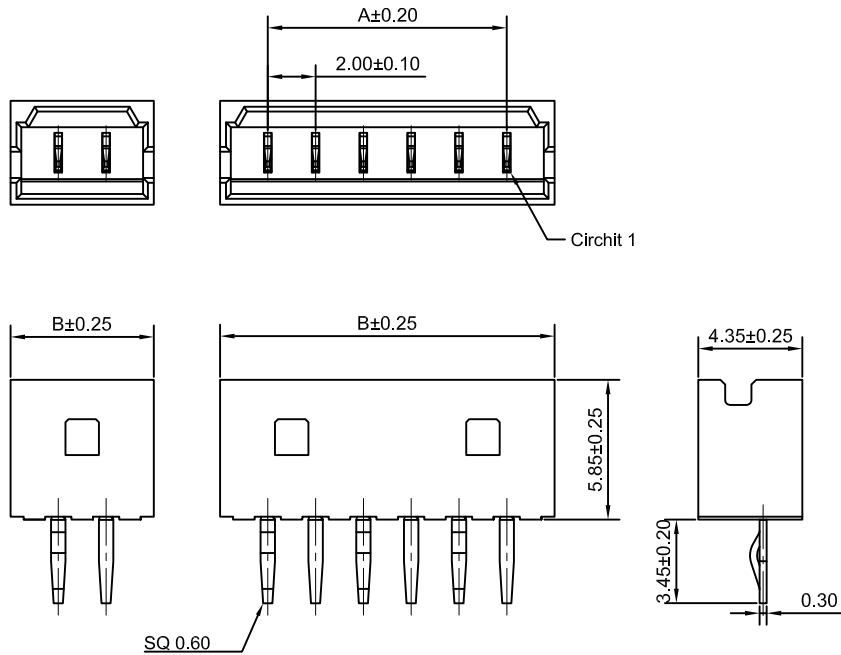

- ◆ FOR 2004H HOUSING
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 125V AC, DC
 - CURRENT RATING: 2A AC, DC
 - CONTACT RESISTANCE: 20 mΩ MAX
 - INSULATION RESISTANCE: 1000 MΩ MIN
 - WITHSTANDING VOLTAGE: 800V AC / MINUTE
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -40°C TO +105°C
- ◆ PART NO.
 - CL2004 V - XX N P
 - ANGLE 180°
 - MOLD NO.
 - NO LOGO
 - CIRCUITS NUMBER 02 TO 15
 - SERIES NO.

P.C.B LAYOUT

Part NO.	Dimensions		Part NO.	Dimensions	
	A	B		A	B
02	2.00	6.00	09	16.00	20.00
03	4.00	8.00	10	18.00	22.00
04	6.00	10.00	11	20.00	24.00
05	8.00	12.00	12	22.00	26.00
06	10.00	14.00	13	24.00	28.00
07	12.00	16.00	14	26.00	30.00
08	14.00	18.00	15	28.00	32.00

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
				X. ±0.50 X.* ±1° .X ±0.30 .X* ±0.1° .XX ±0.20 .XX* ±0.01° .XXX ±0.05 .XXX* ±0.005°

DRAWN/繪圖	DATE/日期	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
JUDY	2023.07.31	PRODUCT NAME/品名				
CHECK BY/審查	DATE/日期	2.0mm PITCH 180° WAFER				
VIVIAN	2023.07.31	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
APPROVED BY/核准	DATE/日期	CL2004V-XXNP	02-15PIN	3:1	A4	mm
WENDY	2023.07.31	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PACKAGE/包裝	BAG	BRASS TIN NY66 UL94V-0	NATURAL		1 OF 1	C