
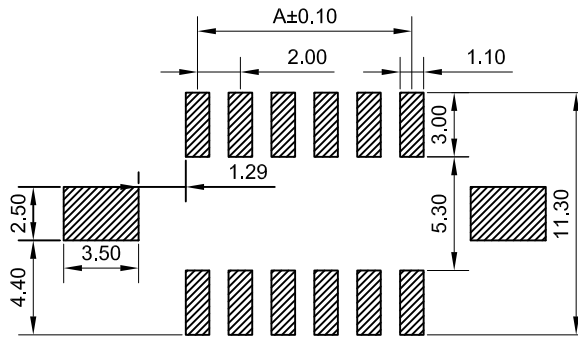
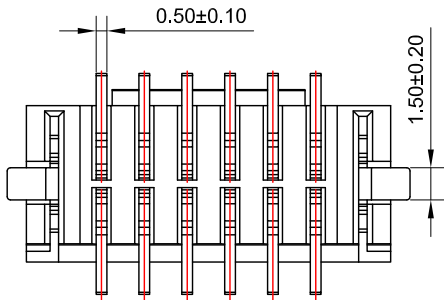
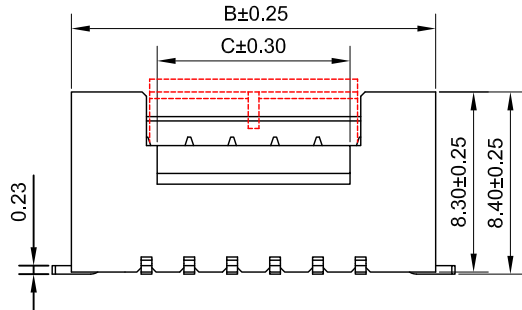


CROWN LINK®



專業薄膜開關連接器第一品牌

ROHS

- ◆ FOR 2009HL HOUSING
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 250V AC,DC
 - CURRENT RATING: 3A AC,DC
 - CONTACT RESISTANCE: 20 mΩ MAX
 - INSULATION RESISTANCE: 1000 MΩ MIN
 - WITHSTANDING VOLTAGE: 800V AC / MINUTE
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -25°C~+85°C

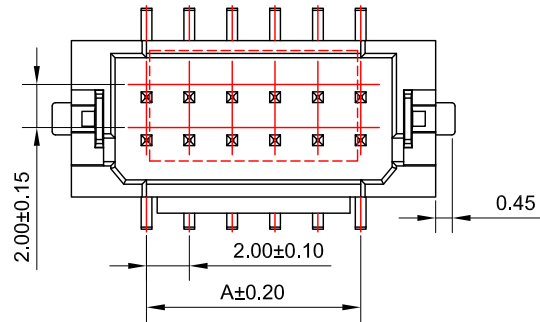

P.C.B LAYOUT

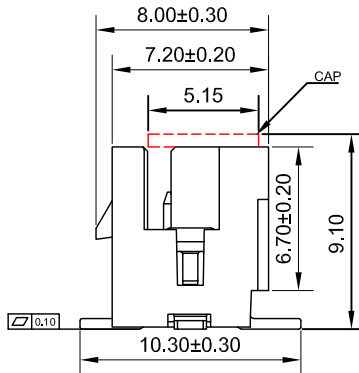

◆ PART NO.

CL2009 S - XX V N H

SMT MOLD NO.
NO LOGO
VERTICAL

SERIES NO. CIRCUITS NUMBER 04 TO 28 OR 36/40

Part NO.	Dimensions			Part NO.	Dimensions		
	A	B	C		A	B	C
04	2.00	9.00	3.00	20	18.00	25.00	15.00
06	4.00	11.00	3.00	22	20.00	27.00	17.00
08	6.00	13.00	3.00	24	22.00	29.00	19.00
10	8.00	15.00	5.00	26	24.00	31.00	21.00
12	10.00	17.00	7.00	28	26.00	33.00	23.00
14	12.00	19.00	9.00	36	34.00	41.00	31.00
16	14.00	21.00	11.00	40	38.00	45.00	35.00
18	16.00	23.00	13.00				

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
JUDY	2023.10.16	PRODUCT NAME/品名				
CHECK BY/審查	DATE/日期	2.00mm PITCH SMT WAFER (PHB)				
VIVIAN	2023.10.16	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
APPROVED BY/核准	DATE/日期	CL2009S-XXVNH	04-28/36/40PIN	5:1	A4	mm
JASON	2023.10.16	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PACKAGE/包裝	650PCS/REEL	BRASS TIN LCP UL94V-0	NATURAL	⊙	1 OF 1	A