

4

3






2

1

CROWN LINK®

專業薄膜開關連接器第一品牌

ROHS

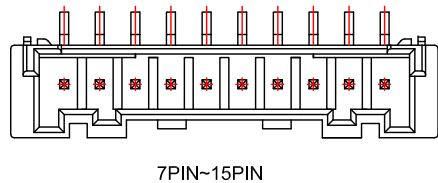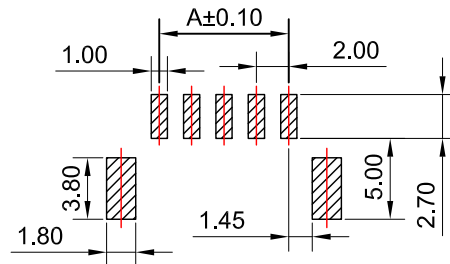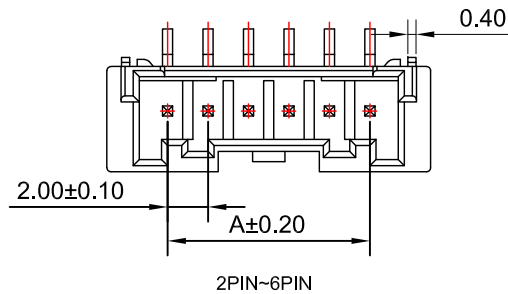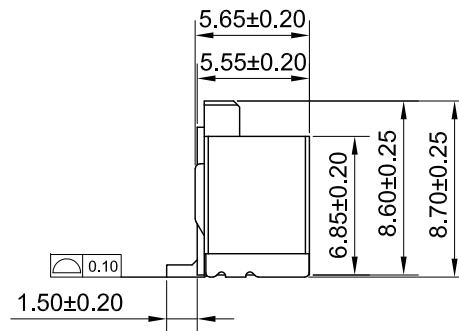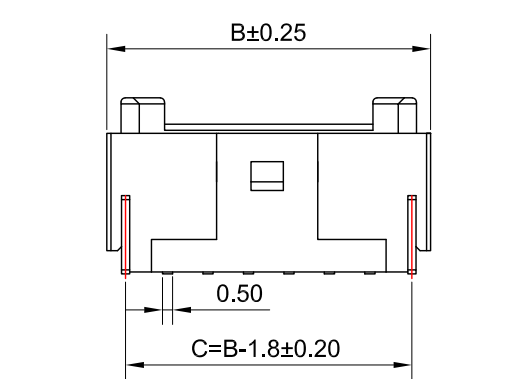

P.C.B LAYOUT

- ◆ FOR 2026HL HOUSING
- ◆ SPECIFICATIONS
 VOLTAGE RATING: 300V AC,DC
 CURRENT RATING: 3A AC,DC
 CONTACT RESISTANCE: 20 mΩ MAX
 INSULATION RESISTANCE: 1000 MΩ MIN
 WITHSTANDING VOLTAGE: 800V AC / MINUTE
- ◆ ENVIRONMENTAL
 TEMPERATURE RANGE: -25°C~+85°C
- ◆ PART NO.
 CL2026 S - XX V N H
 SMT MOLD NO.
 NO LOGO
 VERTICAL
 SERIES NO. CIRCUITS NUMBER 02 TO 15

Part NO.	Dimensions	
	A	B
02	2.00	8.00
03	4.00	10.00
04	6.00	12.00
05	8.00	14.00
06	10.00	16.00
07	12.00	18.00
08	14.00	20.00
09	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍
				X .±0.30 X.* ±2° .X ±0.30 .X.* ±2° .XX ±0.20 .XX.* ±1° .XXX ±0.10 .XXX.* ±0.5°

DRAWN/繪圖 JUDY 2023.11.08	DATE/日期 2023.11.08	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
CHECK BY/審查 VIVIAN 2023.11.08	DATE/日期 2023.11.08	PRODUCT NAME/品名 2.00mm PITCH SMT WAFER (PAE)				
APPROVED BY/核准 JASON 2023.11.08	DATE/日期 2023.11.08	PART NO./料號 CL2026S-XXVNH	PIN NUMBER/針數 02-15PIN	SCALE/比例 5:1	SIZE/圖號 A4	UNIT/單位 mm
PACKAGE/包裝 400PCS/REEL		MATERIAL/材質 BRASS TIN NY6T UL94V-0	COLOR/顏色 NATURAL	ANGLE OF VIEW/視角 ⊕	SHEET/頁碼 1 OF 1	REV/版本 A