CROWNLINK®

專業薄膜開關連接器第一品牌

ROHS

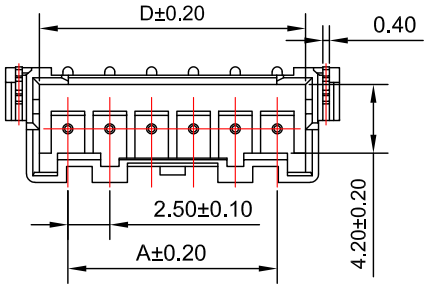


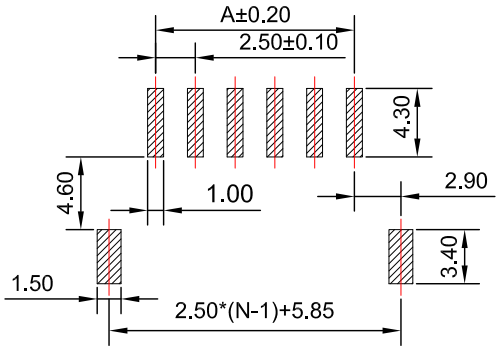


P.C.B LAYOUT

- FOR 2506HL HOUSING
- SPECIFICATIONS
  - VOLTAGE RATING：250V AC,DC
  - CURRENT RATING：3A AC,DC
  - CONTACT RESISTANCE：20 mΩ MAX
  - INSULATION RESISTANCE：1000 MΩ MIN
  - WITHSTANDING VOLTAGE：1000V AC / MINUTE
- ENVIRONMENTAL
  - TEMPERATURE RANGE：-25°C~+85°C
- PART NO.

CL2506 S - XX W N H

- CL2506: SERIES NO.
- S: SMT
- XX: CIRCUITS NUMBER 02 TO 15
- W: LYING DOWN
- N: NO LOGO
- H: MOLD NO.

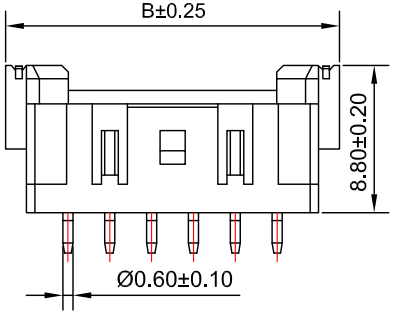





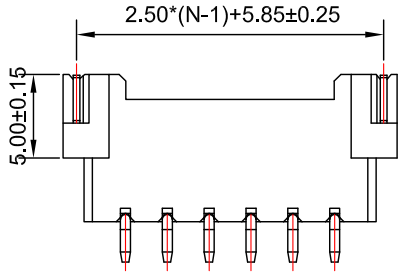







| Part NO. | Dimensions | | | |
|---|---|---|---|---|
| | A | B | C | D |
| 02 | 2.50 | 10.00 | 7.50 | 6.00 |
| 03 | 5.00 | 12.50 | 10.00 | 8.50 |
| 04 | 7.50 | 15.00 | 12.50 | 11.00 |
| 05 | 10.00 | 17.50 | 15.00 | 13.50 |
| 06 | 12.50 | 20.00 | 17.50 | 16.00 |
| 07 | 15.00 | 22.50 | 20.00 | 18.50 |
| 08 | 17.50 | 25.00 | 22.50 | 21.00 |
| 09 | 20.00 | 27.50 | 25.00 | 23.50 |
| 10 | 22.50 | 30.00 | 27.50 | 26.00 |
| 11 | 25.00 | 32.50 | 30.00 | 28.50 |
| 12 | 27.50 | 35.00 | 32.50 | 31.00 |
| 13 | 30.00 | 37.50 | 35.00 | 33.50 |
| 14 | 32.50 | 40.00 | 37.50 | 36.00 |
| 15 | 35.00 | 42.50 | 40.00 | 38.50 |

| REV/版本 | MODIFIED CONTENT /變更內容 | DRAWN/繪圖 | DATE/日期 |
|---|---|---|---|
| | | | |
| | | | |
| | | | |

TOLERANCE RANGE/公差範圍

| | |
|---|---|
| X. | ±0.30 |
| .X | ±0.30 |
| .XX | ±0.20 |
| .XXX | ±0.10 |
| X.° | ±2° |
| .X° | ±2° |
| .XX° | ±1° |
| .XXX° | ±0.5° |

| | | | | | | |
|---|---|---|---|---|---|---|
| DRAWN/繪圖: JUDY | DATE/日期: 2023.10.13 | CROWNLINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR,HOUSING AND DOME. | | | | |
| CHECK BY/審查: VIVIAN | DATE/日期: 2023.10.13 | PRODUCT NAME/品名: 2.50mm PITCH SMT WAFER(XA) | | | | |
| APPROVED BY/核准: JASON | DATE/日期: 2023.10.13 | PART NO./料號: CL2506S-XXWNH | PIN NUMBER/針數: 02-15PIN | SCALE/比例: 5:1 | SIZE/圖號: A4 | UNIT/單位: mm |
| PACKAGE/包裝 | 500PCS/REEL | MATERIAL/材質: BRASS TIN PA6T UL94V-0 | COLOR/顏色: NATURAL | ANGLE OF VIEW/視角 | SHEET/頁碼: 1 OF 1 | REV/版本: A |