



CROWN LINK[®]

專業薄膜開關連接器第一品牌

RoHS

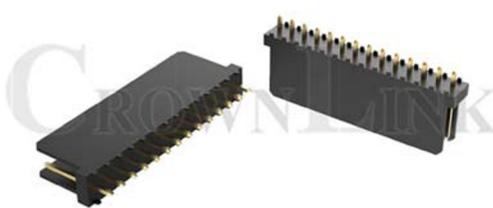




- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 250 V AC , DC
 - CURRENT RATING: 3 A AC , DC
 - CONTACT RESISTANCE: 10 mΩ MAX
 - INSULATION RESISTANCE: 1000 MΩ MIN
 - WITHSTANDING VOLTAGE: 1000V AC / MINUTE
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -25°C~+85°C
- ◆ DIMENSION: A=2.54*N
B=2.54*(N-1)

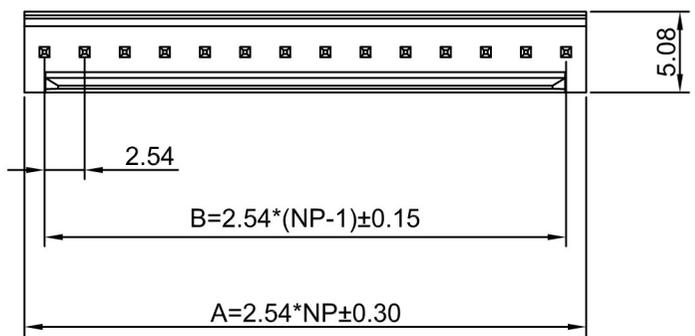

◆ PART NO.
CL254 1 V - XX B N L

SERIES NO. | SINGLE ROW | ANGLE 180° | MOLD NO. | NO LOGO | BLITER TRAY

CIRCUITS NUMBER 02 TO 20
GOLD PLATED 1u"

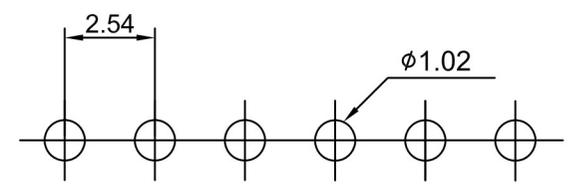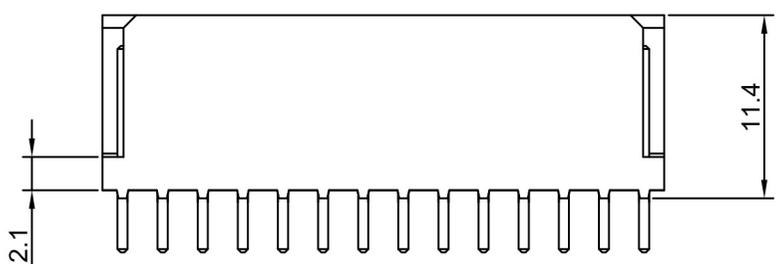

P.C.B. Hole Layout

				x ±0.5	x' ±3°
				x ±0.3	.x' ±2°
				.xx ±0.2	.xx' ±1°
				.xxx ±0.1	.xxx' ±1°
A	FIRST DRAWING	UNA	2019.01.14	TOLERANCE RANGE/公差範圍	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期		

DRAWN/繪圖	DATE/日期	CROWN LINK [®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
UNA	2019.01.14	PRODUCT NAME/品名				
CHECK BY/審查	DATE/日期	2.54mm PITCH 180° WAFER				
JASON	2019.01.14	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
APPROVED BY/核准	DATE/日期	CL2541V-XXBNL	2-20 PIN		A4	mm
WENDY	2019.01.14	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PACKAGE/包裝	TUBE	NY66 UL94V-0	BLACK	⊙	1 OF 1	A