


# CROWN LINK<sup>®</sup>

## 專業薄膜開關連接器第一品牌

RoHS




### ◆ SPECIFICATIONS

- VOLTAGE RATING: 250 V AC , DC
- CURRENT RATING: 3 A AC , DC
- CONTACT RESISTANCE: 20 mΩ MAX
- INSULATION RESISTANCE: 1000 MΩ MIN
- WITHSTANDING VOLTAGE: 1500V AC / MINUTE


### ◆ ENVIRONMENTAL

- TEMPERATURE RANGE: -40°C~+105°C

### ◆ PART NO.




SERIES NO.      CIRCUITS NUMBER 02 TO 26

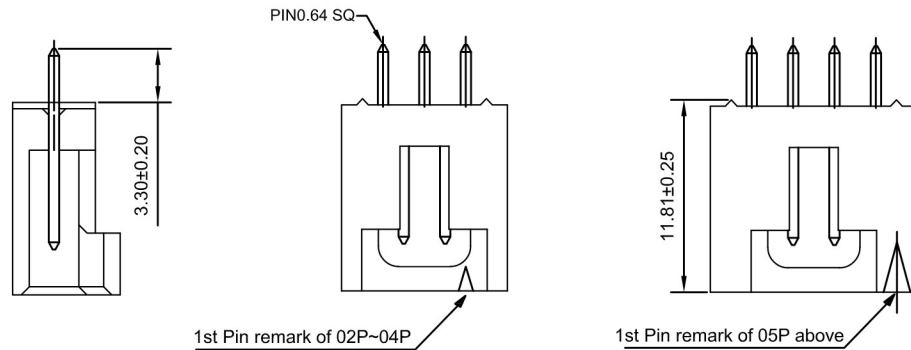


1st Pin remark of 02P~04P


1st Pin remark of 05P above




2P

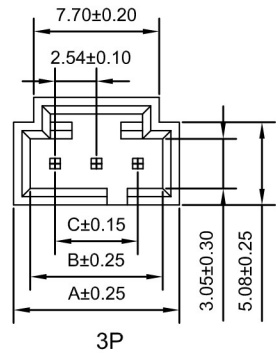

3P



4P-26P



P.C.B LAYOUT

PART NO.	Dimensions			PART NO.	Dimensions		
	A	B	C		A	B	C
CL2545V-02TNP	7.37	5.33	2.54	CL2545V-15TNP	40.65	38.61	35.56
CL2545V-03TNP	10.17	8.13	5.08	CL2545V-16TNP	43.19	41.15	38.10
CL2545V-04TNP	12.71	10.67	7.62	CL2545V-17TNP	45.73	43.69	40.64
CL2545V-05TNP	15.25	13.21	10.16	CL2545V-18TNP	48.27	46.23	43.18
CL2545V-06TNP	17.79	15.75	12.70	CL2545V-19TNP	50.81	48.77	45.72
CL2545V-07TNP	20.33	18.29	15.24	CL2545V-20TNP	53.35	51.31	48.26
CL2545V-08TNP	22.87	20.83	17.78	CL2545V-21TNP	55.89	53.85	50.80
CL2545V-09TNP	25.41	23.37	20.23	CL2545V-22TNP	58.43	56.39	53.34
CL2545V-10TNP	27.95	25.91	22.86	CL2545V-23TNP	60.97	58.93	55.88
CL2545V-11TNP	30.49	28.45	25.40	CL2545V-24TNP	63.51	61.47	58.42
CL2545V-12TNP	33.03	30.99	27.94	CL2545V-25TNP	66.05	64.01	60.96
CL2545V-13TNP	35.57	33.53	30.48	CL2545V-26TNP	68.59	66.55	63.50
CL2545V-14TNP	38.11	36.07	33.02				

				x. ±0.50	x.* ±1*
				.x ±0.30	.x* ±0.1*
				.xx ±0.20	.xx* ±0.01*
				.xxx ±0.05	.xxx* ±0.005*
A	FIRST DRAWING	UNA	2019.01.07	TOLERANCE RANGE/公差範圍	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期		

DRAWN/繪圖	DATE/日期
UNA	2019.01.07
CHECK BY/審查	DATE/日期
VIVIAN	2019.01.07
APPROVED BY/核准	DATE/日期
WENDY	2019.01.07
PACKAGE/包裝	TUBE

<b>CROWN LINK<sup>®</sup> THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>				
PRODUCT NAME/品名				
2.54mm PITCH 180° WAFER				
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
CL2545V-XXTNP	2-26 PIN	2:1	A4	mm
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PBT UL 94V-0	BLACK COLOR		1 OF 1	A