

4

3




2

1

CROWN LINK®




專業薄膜開關連接器第一品牌

ROHS

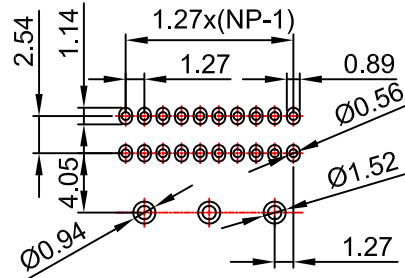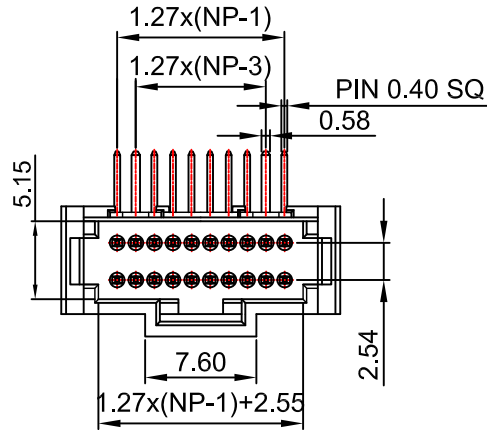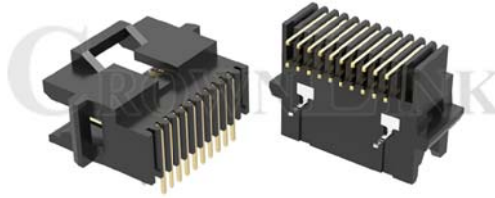

PCB LAYOUT

- ◆ SPECIFICATIONS
 - CURRENT RATING: 1 AMP
 - CONTACT RESISTANCE: 30 MΩ MAX
 - INSULATION RESISTANCE: 1000 MΩ MIN
 - WITHSTANDING VOLTAGE: 250V AC / DC
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -40°C~+105°C
- ◆ PART NO.

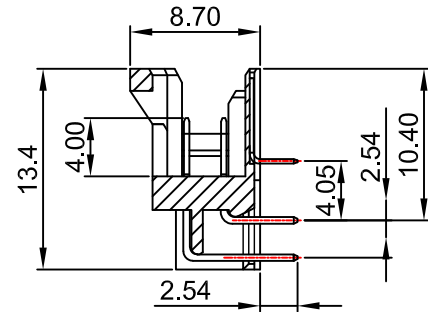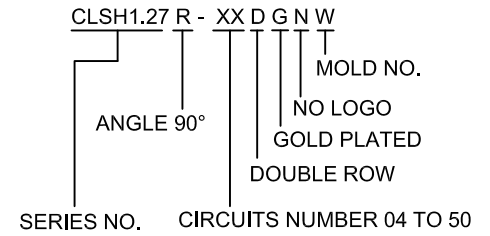

				.X ±0.40
				.XX ±0.25
				.XXX ±0.15
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖 JUDY	DATE/日期 2022.04.15	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
CHECK BY/審查 VIVIAN	DATE/日期 2022.04.15	PRODUCT NAME/品名 1.27mm, DOUBLE ROW, 90° SHROUDED HEADER			
APPROVED BY/核准 JASON	DATE/日期 2022.04.15	PART NO./料號 CLSH1.27R-XXDGNW	PIN NUMBER/針數 04-50 PIN	SCALE/比例 2:1	SIZE/圖號 A4
PACKAGE/包裝 TUBE		MATERIAL/材質 PHOSPHOR BRONZE(S191-H) GOLD-FLASH & PAST+33%(UL94V-0)	COLOR/顏色 BLACK	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1
				UNIT/單位 mm	REV/版本 A