

4

3




2

1

CROWN LINK®

專業薄膜開關連接器第一品牌

RoHS

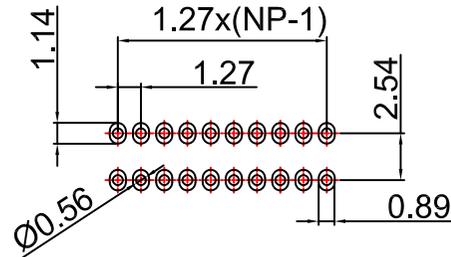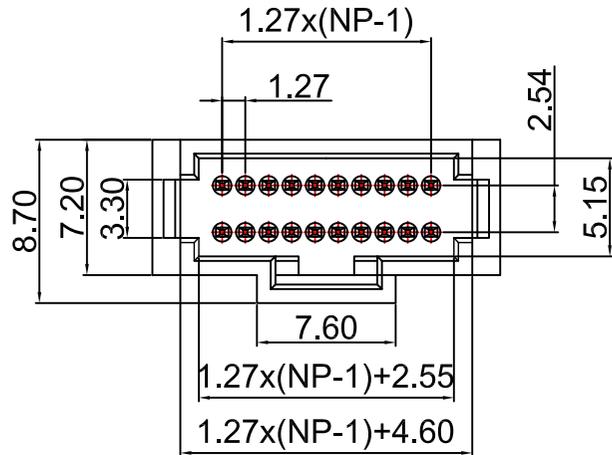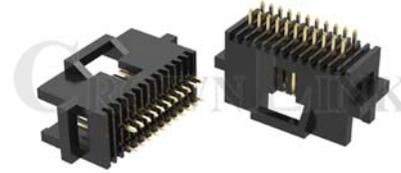

PCB LAYOUT

- ◆ SPECIFICATIONS
- CURRENT RATING: 1 AMP
- CONTACT RESISTANCE: 30 MΩ MAX
- INSULATION RESISTANCE: 1000 MΩ MIN
- WITHSTANDING VOLTAGE: 250V AC / DC
- ◆ ENVIRONMENTAL
- TEMPERATURE RANGE: -40°C~+105°C

◆ PART NO.

CLSH1.27V - XX D G N W

ANGLE 180°



SERIES NO. MOLD NO.

CIRCUITS NUMBER 04 TO 50

NO LOGO

GOLD PLATED

DOUBLE ROW

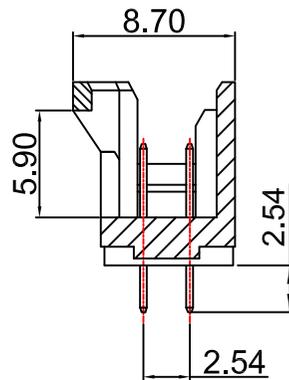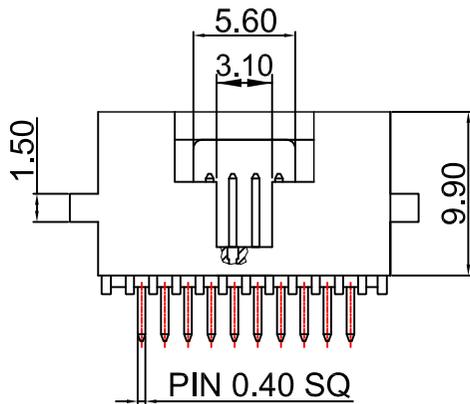

				.X ±0.40
				.XX ±0.25
				.XXX ±0.15
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
JUDY	2022.04.15	PRODUCT NAME/品名			
CHECK BY/審查	DATE/日期	1.27mm, DOUBLE ROW, 180° SHROUDED HEADER			
VIVIAN	2022.04.15	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號
APPROVED BY/核准	DATE/日期	CLSH1.27V-XXDGNW	04-50 PIN	2:1	A4
JASON	2022.04.15	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	UNIT/單位
PACKAGE/包裝	TUBE	PHOSPHOR BRONZE(G191+H) GOLD-FLASH & PART+33%(F/L/S/V40)	BLACK	45°	mm
				SHEET/頁碼	REV/版本
				1 OF 1	A