
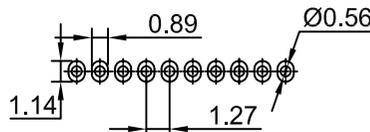
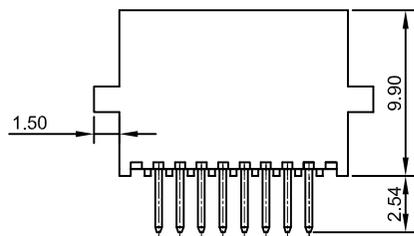

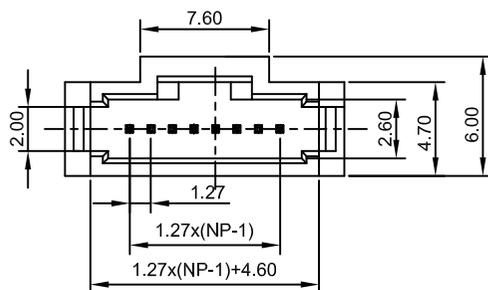
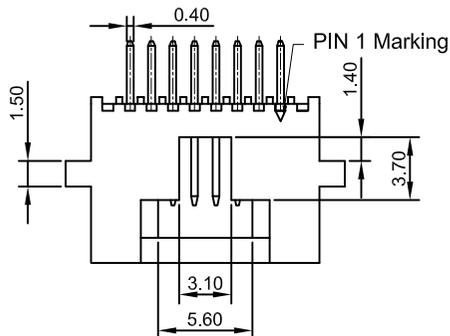


CROWN LINK®

專業薄膜開關連接器第一品牌

RoHS

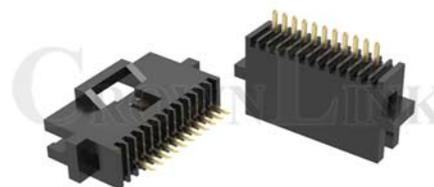

PCB LAYOUT

- ◆ SPECIFICATIONS
CURRENT RATING: 1 AMP
CONTACT RESISTANCE: 30 MΩ MAX
INSULATION RESISTANCE: 1000 MΩ MIN
WITHSTANDING VOLTAGE: 250V AC / DC
- ◆ ENVIRONMENTAL
TEMPERATURE RANGE: -40°C~+105°C

- ◆ PART NO.
CLSH1.27V - XXGNW
- CLSH1.27V - SERIES NO.
- XX - CIRCUITS NUMBER 04 TO 50
- GNW - GOLD PLATED
- NO LOGO - NO LOGO
- MOLD NO. - MOLD NO.
- VERTICAL 180° - VERTICAL 180°

				X.X ±0.40
				X.XX ±0.25
				X.XXX ±0.15
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
JUDY	2022.04.15	CROWN LINK®				
CHECK BY/審查	DATE/日期	PRODUCT NAME/品名				
VIVIAN	2022.04.15	1.27mm PITCH 180° SHROUDED HEADER				
APPROVED BY/核淮	DATE/日期	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
JASON	2022.04.15	CLSH1.27V - XXGNW	04-50 PIN	3:1	A4	mm
PACKAGE/包裝	TUBE	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
		PHOSPHOR BRONZE(5191-H) GOLD-FLASH & PAST+30%GF(UL94V-0)	BLACK	30°	1 OF 1	A