
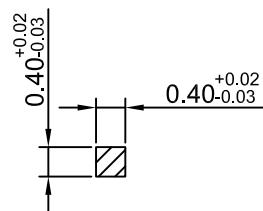
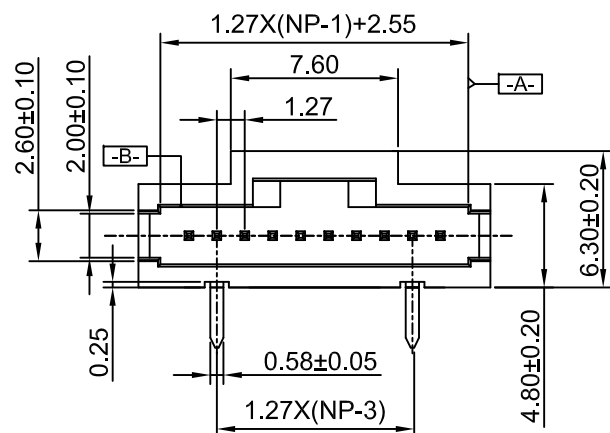



CROWN LINK®

專業薄膜開關連接器第一品牌


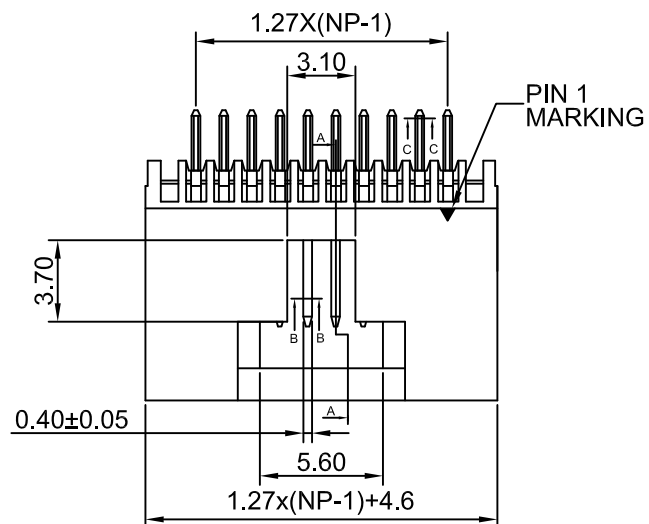


SECTION B - B
SCALE 10:1


0.10±0.05*45°±5°(X4)



SECTION C - C
SCALE 10:1

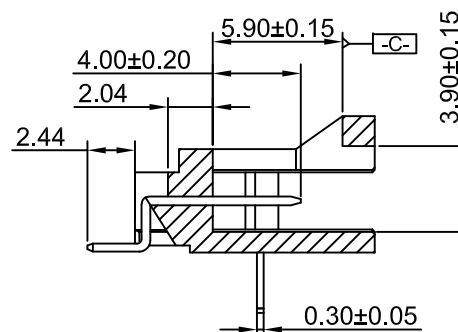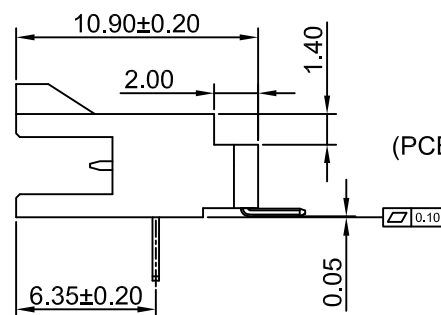


SECTION A - A
SCALE 3:1

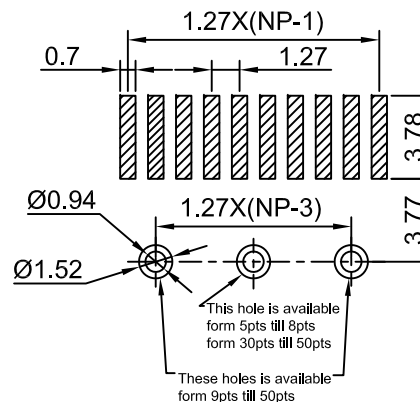

P.C.B LAYOUT
(PCB BOARD TOLERANCE±0.05)

RoHS

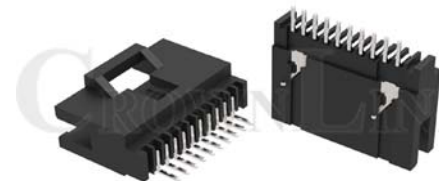

- ◆ SPECIFICATIONS
CURRENT RATING: 1 AMP
CONTACT RESISTANCE: 30 MΩ MAX
INSULATION RESISTANCE: 1000 MΩ MIN
WITHSTANDING VOLTAGE: 250V AC / DC
- ◆ ENVIRONMENTAL
TEMPERATURE RANGE: -40°C~+105°C

◆ PART NO.
CLSH1.27 S - XX G N W
SERIES NO. SMT MOLD NO. NO LOGO GOLD PLATED
CIRCUITS NUMBER

				X. ±1 X.X ±0.3 X.XX ±0.20
A	FIRST DRAWING	LACY	2020.08.03	X. ° ±3° X.X° ±1.0°
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
LACY	2020.08.03	PRODUCT NAME/品名				
CHECK BY/審查	DATE/日期	1.27mm PITCH SMT WAFER WITH FIXING				
VIVIAN	2020.08.03	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
APPROVED BY/核准	DATE/日期	CLSH1.27S - XXGNW	04~50PIN	3:1	A4	mm
JASON	2020.08.03	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PACKAGE/包裝	TUBE OR REEL	PHOSPHOR BRONZE	BLACK COLOR	45°	1 OF 1	A
		GOLD-FLASH & PAST UL94V-0				