


CROWN LINK[®]

專業薄膜開關連接器第一品牌

RoHS

- ◆ FOR 2003 SERIES CONNECTOR
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 125V AC , DC
 - CURRENT RATING: 2A AC , DC
 - CONTACT RESISTANCE: 20mΩ MAX
 - INSULATION RESISTANCE: 1000 MΩ MIN.
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -40°C~+105°C
 - WITHSAND VOLTAGE: 500 V AC / MINUTE

◆ PART NO.
 2003H - XX M P
 SERIES NO. MOLD NO.
 MALE
 CIRCUITS NUMBER 02 TO 13

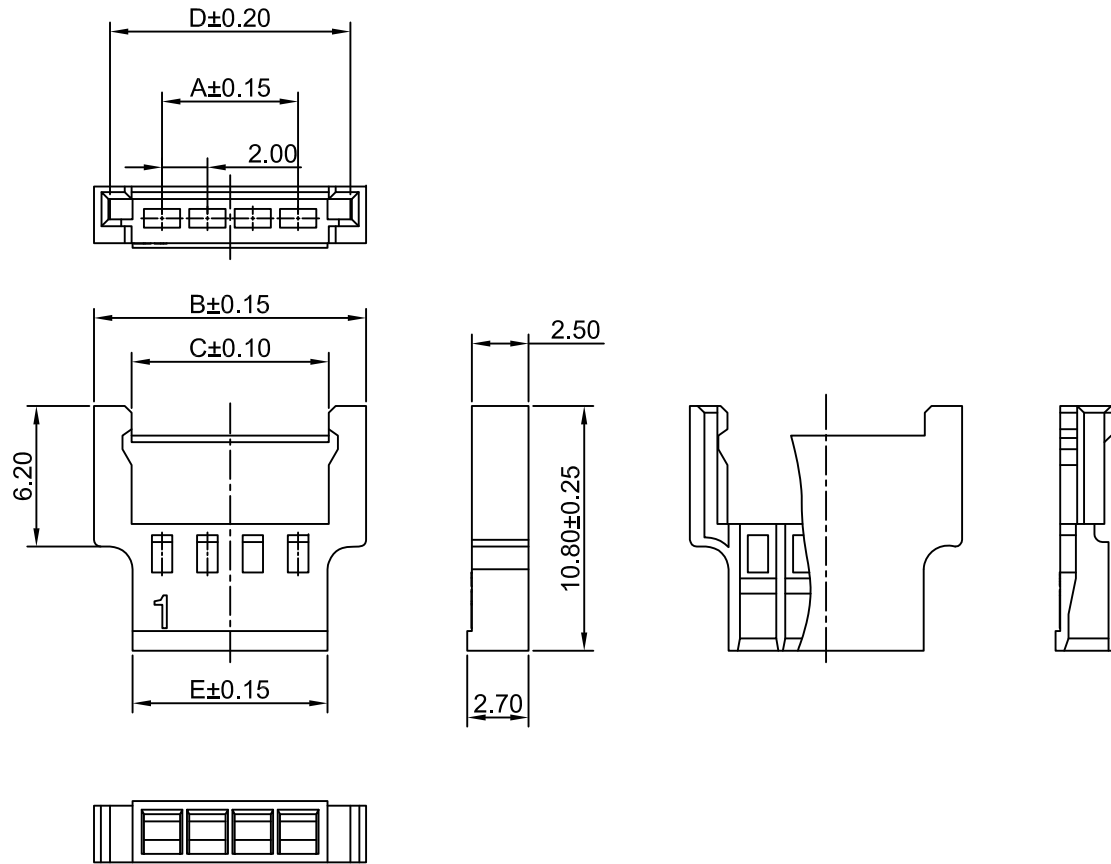

Part NO.	Dimensions				
	A	B	C	D	E
02	2.00	8.00	4.70	6.74	4.60
03	4.00	10.00	6.70	8.74	6.60
04	6.00	12.00	8.70	10.74	8.60
05	8.00	14.00	10.70	12.74	10.60
06	10.00	16.00	12.70	14.74	12.60
07	12.00	18.00	14.70	16.74	14.60
08	14.00	20.00	16.70	18.74	16.60
09	16.00	24.00	18.70	20.74	18.60
10	18.00	26.00	20.70	22.74	20.60
11	20.00	28.00	22.70	24.74	22.60
13	24.00	30.00	26.70	28.74	26.60

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期

X. ±0.50 X* ±1°
 X ±0.30 X* ±0.1°
 XX ±0.20 .XX* ±0.01°
 XXX ±0.10 .XXX* ±0.005°

TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
JUDY	2023.06.01	PRODUCT NAME/品名				
CHECK BY/審查	DATE/日期	2.00mm XHB HOUSING FOR CABLE				
VIVIAN	2023.06.01	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
APPROVED BY/核准	DATE/日期	2003H-XXMP	02-13 PIN	4:1	A4	mm
JASON	2023.06.01	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PACKAGE/包裝	BAG	NY66 UL 94V-0	NATURAL	⊕	1 OF 1	A

4

3

2

1

D

D

C

C

B

B

A

A

4

3

2

1