CROWNLINK®

專業薄膜開關連接器第一品牌

RoHS

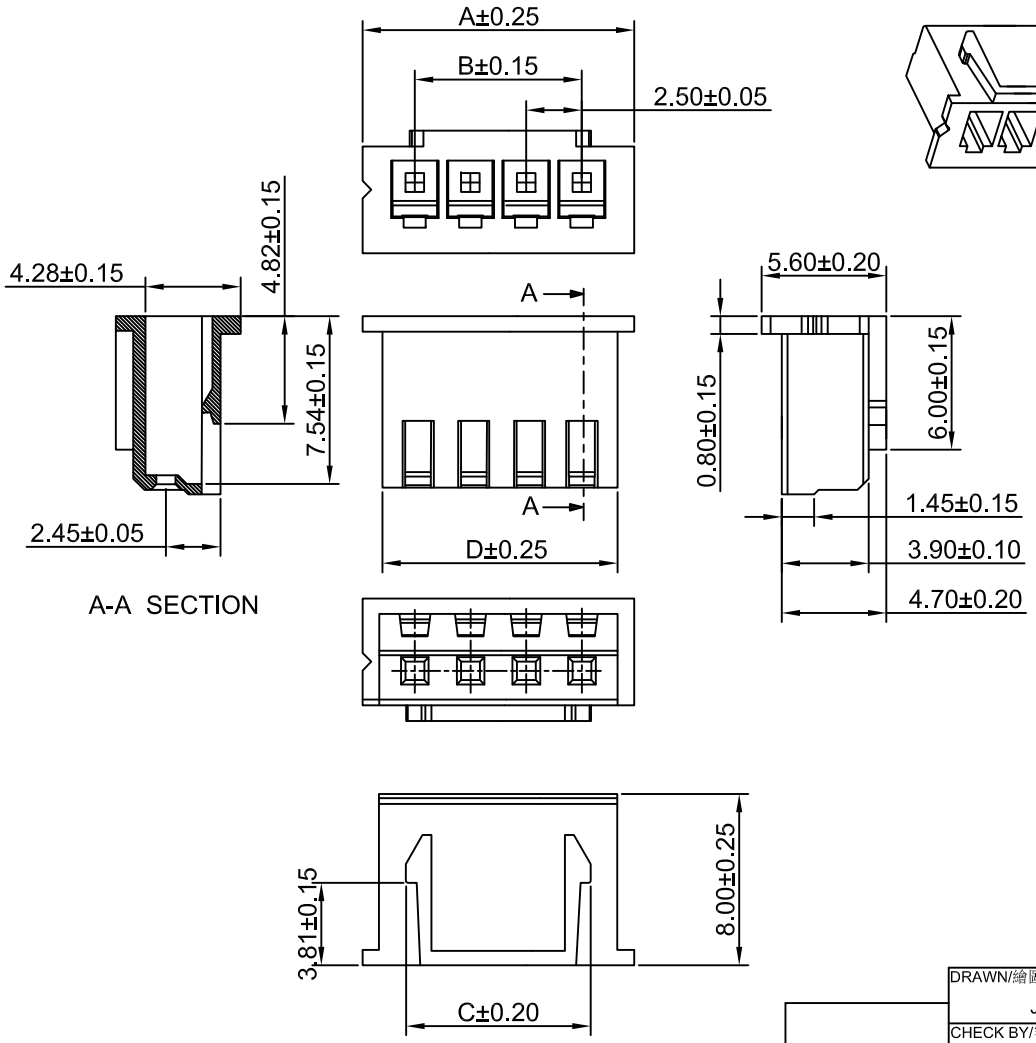




- FOR 2512 SERIES CONNECTOR
- SPECIFICATIONS
  - VOLTAGE RATING：250V AC , DC
  - CURRENT RATING：3A AC , DC
  - INSULATION RESISTANCE：1000 MΩ MIN.
  - CONTACT RESISTANCE:10mΩ MAX
- ENVIRONMENTAL
  - TEMPERATURE RANGE：-40°C~+105°C
  - WITHSAND VOLTAGE：800V AC / MINUTE
- APPLICABLE WIRE:AWG#24~#28
- PART NO.

2501H - XX N P

SERIES NO.

MOLD NO.

NO LOGO

CIRCUITS NUMBER 02 TO 20

| Part NO. | Dimensions | | | | Part NO. | Dimensions | | | |
|---|---|---|---|---|---|---|---|---|---|
| | A | B | C | D | | A | B | C | D |
| 02 | 7.30 | 2.50 | 3.50 | 5.70 | 12 | 32.30 | 27.50 | 28.50 | 30.70 |
| 03 | 9.80 | 5.00 | 6.00 | 8.20 | 13 | 34.80 | 30.00 | 31.00 | 33.20 |
| 04 | 12.30 | 7.50 | 8.50 | 10.70 | 14 | 37.30 | 32.50 | 33.50 | 35.70 |
| 05 | 14.80 | 10.00 | 11.00 | 13.20 | 15 | 39.80 | 35.00 | 36.00 | 38.20 |
| 06 | 17.30 | 12.50 | 13.50 | 15.70 | 16 | 42.30 | 37.50 | 38.50 | 40.70 |
| 07 | 19.80 | 15.00 | 16.00 | 18.20 | 17 | 44.80 | 40.00 | 41.00 | 43.20 |
| 08 | 22.30 | 17.50 | 18.50 | 20.70 | 18 | 47.30 | 42.50 | 43.50 | 45.70 |
| 09 | 24.80 | 20.00 | 21.00 | 23.20 | 19 | 49.80 | 45.00 | 46.00 | 48.20 |
| 10 | 27.30 | 22.50 | 23.50 | 25.70 | 20 | 52.30 | 47.50 | 48.50 | 50.70 |
| 11 | 29.80 | 25.00 | 26.00 | 28.20 | | | | | |

| REV/版本 | MODIFIED CONTENT /變更內容 | DRAWN/繪圖 | DATE/日期 |
|---|---|---|---|
| | | | |

TOLERANCE RANGE/公差範圍

| | |
|---|---|
| X. ±0.50 | X.° ±1° |
| .X ±0.30 | .X° ±0.1° |
| .XX ±0.20 | .XX° ±0.01° |
| .XXX ±0.05 | .XXX° ±0.005° |

| | |
|---|---|
| DRAWN/繪圖 JUDY | DATE/日期 2023.07.07 |
| CHECK BY/審查 VIVIAN | DATE/日期 2023.07.07 |
| APPROVED BY/核准 JASON | DATE/日期 2023.07.07 |
| PACKAGE/包裝 | BAG |

CROWNLINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR,HOUSING AND DOME.

PRODUCT NAME/品名: 2.50mm XHB HOUSING FOR CABLE

| PART NO./料號 | PIN NUMBER/針數 | SCALE/比例 | SIZE/圖號 | UNIT/單位 |
|---|---|---|---|---|
| 2501H-XXNP | 02-20 PIN | 4:1 | A4 | mm |
| MATERIAL/材質 | COLOR/顏色 | ANGLE OF VIEW/視角 | SHEET/頁碼 | REV/版本 |
| NY66 UL 94V -0 | NATURAL | | 1 OF 1 | A |