


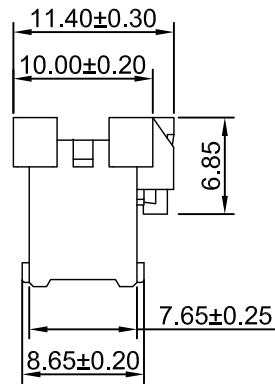
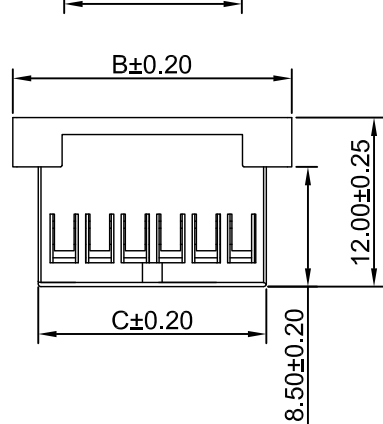
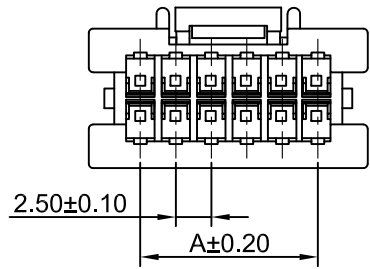



CROWN LINK[®]

專業薄膜開關連接器第一品牌

RoHS



2*8PIN以下

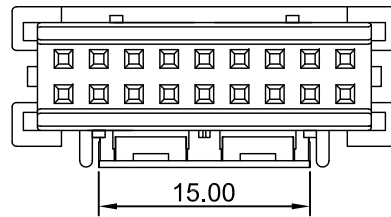

2*9PIN以上

- ◆ FOR 2506 SERIES CONNECTOR
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 250V AC , DC
 - CURRENT RATING: 3A AC , DC
 - CONTACT RESISTANCE: 20mΩ MAX
 - INSULATION RESISTANCE: 1000 MΩ MIN.
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -25°C~+85°C
 - WITHSTAND VOLTAGE: 1000 V AC / MINUTE

◆ PART NO.
 2506HL - XX D N H
 SERIES NO. MOLD NO.
 NO LOGO
 DOUBLE ROW
 CIRCUITS NUMBER 08 TO 40

Part NO.	Dimensions			Part NO.	Dimensions		
	A	B	C		A	B	C
8	7.50	15.00	11.20	26	30.00	37.50	33.70
10	10.00	17.50	13.70	28	32.50	40.00	36.20
12	12.50	20.00	16.20	30	35.00	42.50	38.70
14	15.00	22.50	18.70	32	37.50	45.00	41.20
16	17.50	25.00	21.20	34	40.00	47.50	43.70
18	20.00	27.50	23.70	36	42.50	50.00	46.20
20	22.50	30.00	26.20	38	45.00	52.50	48.70
22	25.00	32.50	28.70	40	47.50	55.00	51.20
24	27.50	35.00	31.20				

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
JUDY	2023.10.13	PRODUCT NAME/品名				
CHECK BY/審查	DATE/日期	2.50mm XHB HOUSING FOR CABLE(XA)				
VIVIAN	2023.10.13	PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
APPROVED BY/核淮	DATE/日期	2506HL-XXDNH	08-40 PIN	4:1	A4	mm
JASON	2023.10.13	MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PACKAGE/包裝	2,000/BAG	NY66 UL 94V-0	WHITE	⊕	1 OF 1	A