






CROWN LINK[®]

專業薄膜開關連接器第一品牌

RoHS





- ◆ FOR 2512 SERIES CONNECTOR
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 500V AC , DC
 - CURRENT RATING: 3A AC , DC
 - CONTACT RESISTANCE: 20mΩ MAX
 - INSULATION RESISTANCE: 500 MΩ MIN.
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -40°C~+105°C
 - WITHSAND VOLTAGE: 1000 V AC / MINUTE



4PIN~15PIN

◆ PART NO.
 2512HL - XX N P
 SERIES NO. MOLD NO.
 NO LOGO
 CIRCUITS NUMBER 02 TO 15

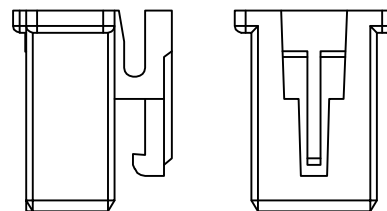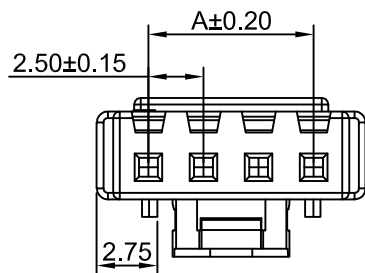

2PIN~3PIN

PIN NO.	A	B	C	D	PIN NO.	A	B	C	D
2	2.50	5.70	3.00	7.20	9	20.00	23.20	10.30	24.70
3	5.00	8.20	3.00	9.70	10	22.50	25.70	15.30	27.20
4	7.50	10.70	5.30	12.20	11	25.00	28.20	15.30	29.70
5	10.00	13.20	6.50	14.70	12	27.50	30.70	15.30	32.20
6	12.50	15.70	6.50	17.20	13	30.00	33.20	15.30	34.70
7	15.00	18.20	10.30	19.70	14	32.50	35.70	15.30	37.20
8	17.50	20.70	10.30	22.20	15	35.00	38.20	15.30	39.70

DRAWN/繪圖	JUDY	DATE/日期	2022.10.19	CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.							
CHECK BY/審查	VIVIAN	DATE/日期	2022.10.19								
APPROVED BY/核淮	JASON	DATE/日期	2022.10.19	PRODUCT NAME/品名	2.50mm XHB HOUSING FOR CABLE						
PACKAGE/包裝	BAG	PART NO./料號	2512HL-XXNP	PIN NUMBER/針數	02-15 PIN	SCALE/比例	4:1	SIZE/圖號	A4	UNIT/單位	mm
		MATERIAL/材質	NY66 UL 94V -2(0)	COLOR/顏色	NATURAL	ANGLE OF VIEW/視角		SHEET/頁碼	1 OF 1	REV/版本	A

TOLERANCE RANGE/公差範圍	X .±0.50 X* ±1° X .±0.30 X* ±0.1° .XX ±0.20 .XX* ±0.01° .XXX ±0.05 .XXX* ±0.005°
----------------------	---

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期
--------	------------------------	----------	---------