



CROWN LINK[®]

專業薄膜開關連接器第一品牌




RoHS



2 CIRCUIT



3 CIRCUIT

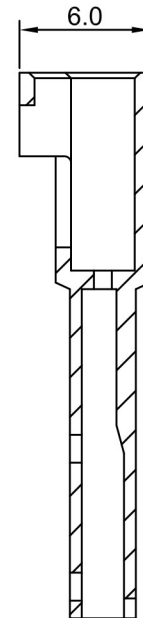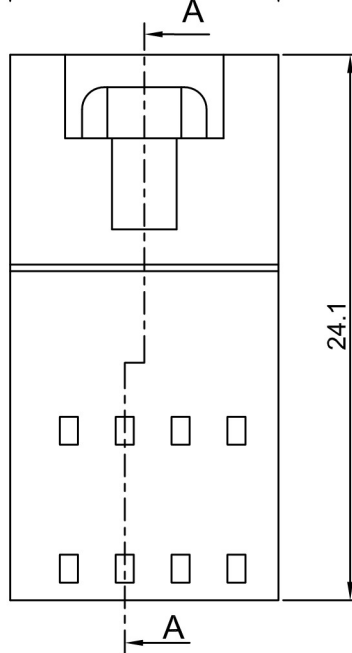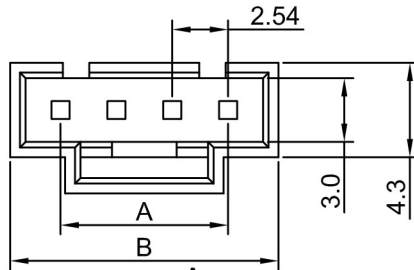

SECTION A-A

- ◆ FOR 2803 SERIES CONNECTOR
- ◆ SPECIFICATIONS
 - VOLTAGE RATING: 250 V AC , DC
 - CURRENT RATING: 2.5 A AC , DC
 - INSULATION RESISTANCE: 1,000 MΩ MIN
- ◆ ENVIRONMENTAL
 - TEMPERATURE RANGE: -25°C~+85°C
 - WITHSAND VOLTAGE: 800 V AC / MINUTE

◆ PART NO.
 2803HLW - XXCNS

SERIES NO. MOLD NO.
 NO LOGO
 CONCAVE

CIRCUITS NUMBER 02 TO 15

◆ SPECIFIED TOLERANCE

PIN NO.	A	B	PIN NO.	A	B
02	2.54	7.1	09	20.32	24.9
03	5.08	9.7	10	22.86	27.4
04	7.62	12.2	11	25.40	30.0
05	10.16	14.7	12	27.94	32.5
06	12.70	17.3	13	30.48	35.0
07	15.24	19.8	14	33.02	37.6
08	17.78	22.4	15	35.56	40.1

				一般公差 ± 0.2
A	FIRST DRAWING	ANNIE	2012.07.26	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	
				TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期
ANNIE	2012.07.26
CHECK BY/審查	DATE/日期
VIVIAN	2012.07.26
APPROVED BY/核准	DATE/日期
JASON	2012.07.26
PACKAGE/包裝	02-06 PIN 1,000 PCS/BAG 07-15 PIN 500 PCS/BAG

THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.				
PRODUCT NAME/品名				
2.54mm PITCH HOUSING FOR FFC/FPC				
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位
2803HLW- XXCNS	2-15 PIN	3:1	A4	mm
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PBT UL 94V - 0	BLACK COLOR		1 OF 1	A