


# CROWN LINK<sup>®</sup>

專業薄膜開關連接器第一品牌

RoHS

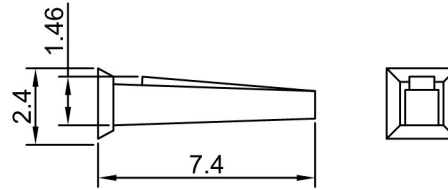



"A" & "B" DIM. TOLERANCE

2P ~ 7P: ±0.15

8P ~ 10P: ±0.25

11P~20P: ±0.35

HOUSING POLARIZING KEY

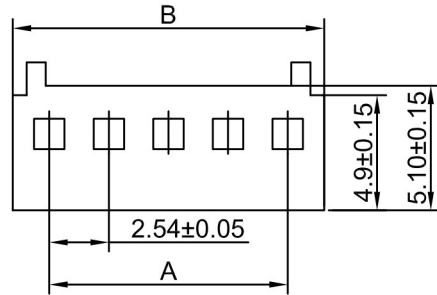



4P

- ◆ FOR 280301 SERIES CONNECTOR
- ◆ SPECIFICATIONS
  - VOLTAGE RATING: 250V AC , DC
  - CURRENT RATING: 3A AC , DC
  - INSULATION RESISTANCE: 1000 MΩ MIN
- ◆ ENVIRONMENTAL
  - TEMPERATURE RANGE: -25°C~+85°C
  - WITHSAND VOLTAGE: 1000 V AC / MINUTE

◆ PART NO.

2803HS - XX C S  
 SERIES NO.                      MOLD NO.  
 COLOR C:CREAMY WHITE  
 CIRCUITS NUMBER 02 TO 20

PIN NO.	A	B
02	2.54	5.65
03	5.08	8.19
04	7.62	10.73
05	10.16	13.27
06	12.70	15.81
07	15.24	18.35
08	17.78	20.89
09	20.32	23.43
10	22.86	25.97
11	25.40	28.51
12	27.94	31.05
13	30.48	33.59
14	33.02	36.13
15	35.56	38.67
16	38.10	41.21
17	40.64	43.75
18	43.18	46.29
19	45.72	48.83
20	48.26	51.37

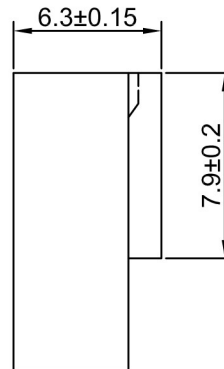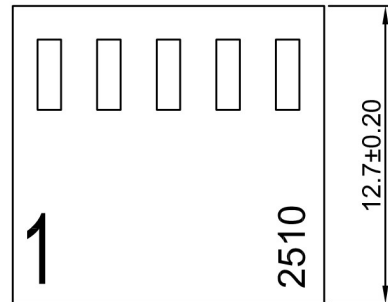

				X. ± 0.50
				X.X ± 0.25
				X.XX ± 0.20
A	FIRST DRAWING	LACY	2020.07.15	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期
LACY	2020.07.15
CHECK BY/審查	DATE/日期
VIVIAN	2020.07.15
APPROVED BY/核准	DATE/日期
JASON	2020.07.15
PACKAGE/包裝	
	1,000PCS/BAG

<b>THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>						
PRODUCT NAME/品名						
2.54mm PITCH HOUSING FOR FFC/FPC						
PART NO./料號	PIN NUMBER/針數	SCALE/比例	SIZE/圖號	UNIT/單位		
2803HS-XXCS	02-20 PIN	3:1	A4	mm		
MATERIAL/材質	COLOR/顏色	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本		
NY66 UL 94V - 2	CREAMY WHITE		1 OF 1	A		