CROWNLINK®

專業薄膜開關連接器第一品牌

ROHS

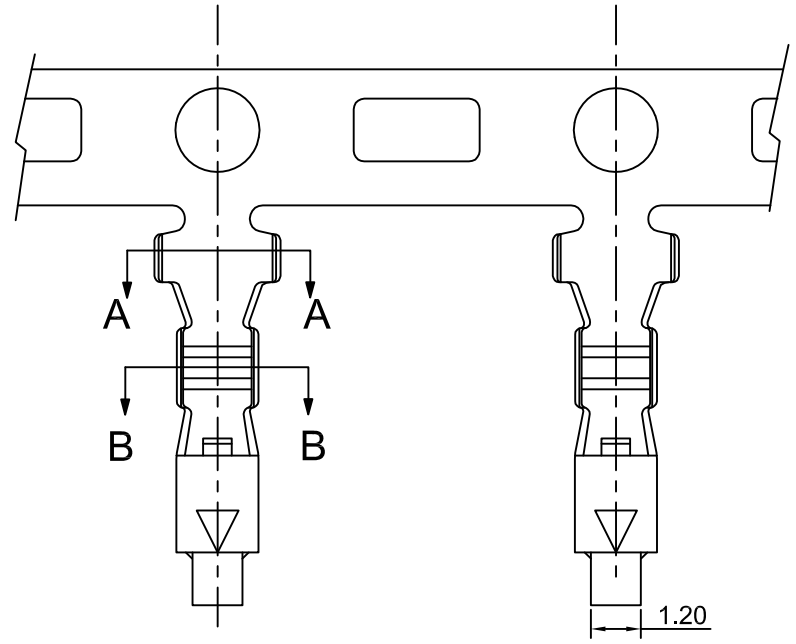

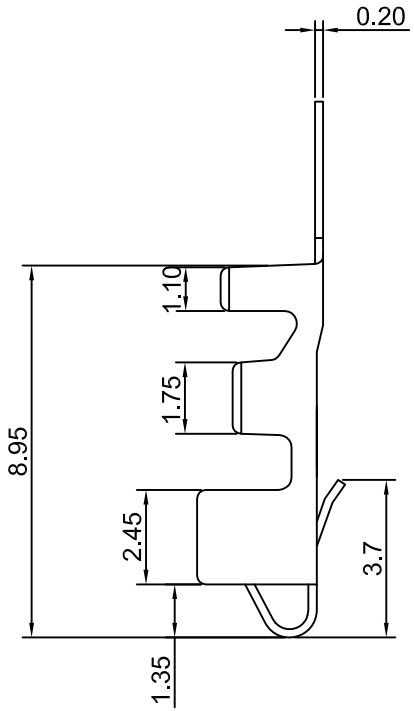



A-A SECTION



B-B SECTION



- FOR 2502H SERIES HOUSING
- SPECIFICATIONS

  VOLTAGE RATING：250V AC,DC

  CURRENT RATING：3A AC,DC

  WITHSTANDING VOLTAGE. 1500V.AC/MINUTE

  INSULATION RESISTANCE：500 MΩ MIN

  CONTACT RESISTANCE:10mΩ MAX

  TEMPERATURE RANGE：-25°C~+85°C

  (INCLUDING TEMPERATURE RISE)
- APPLICABLE WIRE:AWG#22~#28
- PART NO.

2502 - 05K - 0T(0G) - F L

SERIES NO.

05K/REEL

0T:TIN PLATED.
0G:GOLD PLATED
OTHER PLATINGS ON REQUEST.

FEMALE

MOLD NO.

REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期

TOLERANCE RANGE/公差範圍

X. ±0.50	X.° ±1°
.X ±0.30	.X° ±0.1°
.XX ±0.20	.XX° ±0.01°
.XXX ±0.10	.XXX° ±0.005°

DRAWN/繪圖 JUDY	DATE/日期 2023.07.17	CROWNLINK® THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR,HOUSING AND DOME.			
CHECK BY/審查 VIVIAN	DATE/日期 2023.07.17	PRODUCT NAME/品名 2.50mm PITCH CONNECTOR FOR CABLE			
APPROVED BY/核准 WENDY	DATE/日期 2023.07.17	PART NO./料號 2502-05K-0T(0G)-FL	SCALE/比例 8:1	SIZE/圖號 A4	UNIT/單位 mm
PACKAGE/包裝	5,000PCS/REEL	MATERIAL/材質 PHOSPHOR BRONZE	ANGLE OF VIEW/視角	SHEET/頁碼 1 OF 1	REV/版本 A