

4

3

2

1

CROWN LINK[®]

專業薄膜開關連接器第一品牌



ROHS

0T:TIN PLATED

◆ FOR CL2507 SERIES HOUSING

◆ SPECIFICATIONS

VOLTAGE RATING: 250V AC,DC

CURRENT RATING: 2A AC,DC

WITHSTANDING VOLTAGE: AC 600V FOR 1 MINUTE

INSULATION RESISTANCE: 1000 MΩ MIN

CONTACT RESISTANCE: INITIAL VALUE/10mΩ MAX

APPLICABLE PC BOARD THICKNESS: 1.6mm

TEMPERATURE RANGE: -20°C~+85°C

(INCLUDING TEMPERATURE RISE)

◆ APPLICABLE WIRE:AWG#22-30

◆ PART NO.






2803 - 07K - 0T - FA

SERIES NO.
7K/REEL

FEMALE

MOLD NO.

0T:PLATED NI 30~40u",TIN 80 u"
OTHER PLATINGS ON REQUEST

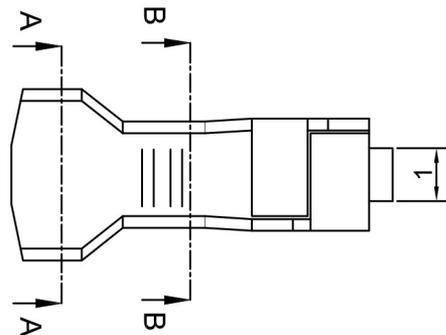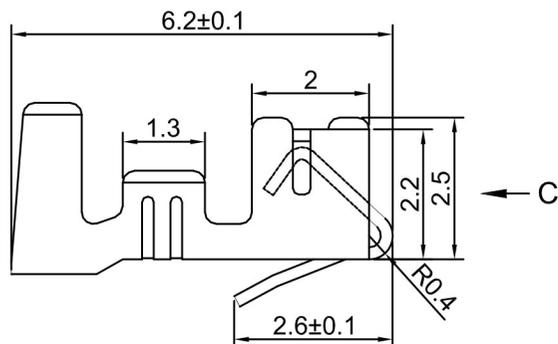

				X. ±0.35
				.X ±0.20
				.XX ±0.10
A	FIRST DRAWING	ANNIE	2014.10.10	.XXX ±0.03
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期
ANNIE	2014.10.10
CHECK BY/審查	DATE/日期
VIVIAN	2014.10.10
APPROVED BY/核准	DATE/日期
ELIAN	2014.10.10
PACKAGE/包裝	7,000PCS/REEL

CROWN LINK[®] THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
PRODUCT NAME/品名 5.08mm PITCH CONNECTOR FOR CABLE			
PART NO./料號	SCALE/比例	SIZE/圖號	UNIT/單位
2803-07K-0T-FA	8:1	A4	mm
MATERIAL/材質	ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本
PHOSPHOR BRONZE		1 OF 1	A

D

D

C

C

B

B

A

A