

4

3



2

1

# CROWN LINK<sup>®</sup>

專業薄膜開關連接器第一品牌

ROHS

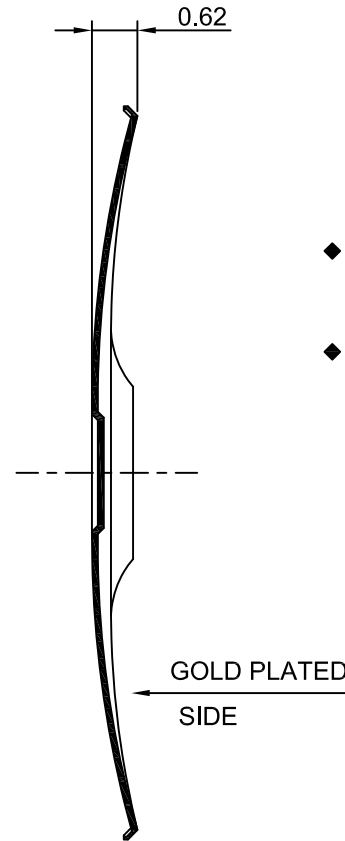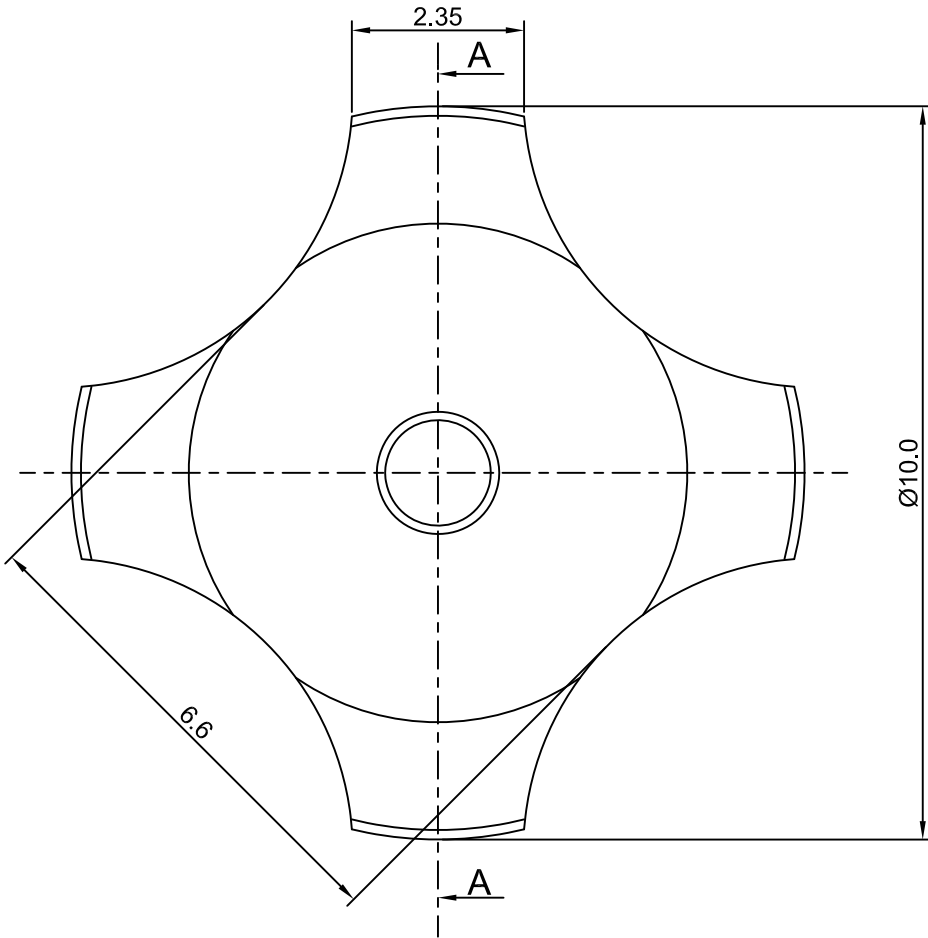

- ◆ SPECIFICATIONS
  - TRIP FORCE: 300 ± 30 g
  - CLICK RATIO: MIN 45 %
- ◆ TESTING CONDITIONS
  - FORCE TEST PROBE: HARD POINTED
  - LIFE TEST PROBE: RB 60° SILICON ROUND HEAD
  - LIFE TEST FORCE: 365 g
  - LIFE TEST SPEED: 180 CYCLE / MIN
  - BURR: MAX 0.05 MM
  - UNLESS OTHERWISE SPECIFIED TESTING METHOD ACCORDING TO CROWNLINK STANDARD PROCEDURE

SECTION A - A

				X.XX ±0.10
B	NEW DRAWING FORMAT	ANNIE	2012.12.26	
A	FIRST DRAWING	ANNIE	2010.10.23	
REV/版本	MODIFIED CONTENT /變更內容	DRAWN/繪圖	DATE/日期	
				TOLERANCE RANGE/公差範圍

DRAWN/繪圖	DATE/日期	<b>CROWN LINK<sup>®</sup> THE LEADING MANUFACTURER OF FPC &amp; FFC CONNECTOR, HOUSING AND DOME.</b>						
ANNIE	2012.12.26	PRODUCT NAME/品名 METAL DOME						
CHECK BY/審查	DATE/日期	PART NO./料號	THICKNESS/厚度	SCALE/比例	SIZE/圖號	UNIT/單位		
VIVIAN	2012.12.26	CL10-QGD-300T	0.08 mm	10:1	A4	mm		
APPROVED BY/核准	DATE/日期	MATERIAL/材質		ANGLE OF VIEW/視角	SHEET/頁碼	REV/版本		
JASON	2012.12.26	SINGLE SIDE GOLD PLATED		45°	1 OF 1	B		
PACKAGE/包裝		STAINLESS STEEL SUS 304						
	10,000PCS/BAG							

D

D

C

C

B

B

A

A