

套管 SLEEVES

材質: 高級軟質PVC
依溫度姓可分為三級:
1.一般品:耐溫90℃以下
2.耐燃品(H):耐溫100℃以下
3.高級品(UL):耐溫105℃

Material: High quality soft P.V.C
According to the rating temperature we differentiate them into three categories :
1.Common products: rated temperature is under 90℃
2.Medium products: rated temperature is under 100℃
3.High level products: rated temperature is 105℃

形式 FORM


(尺寸 DIMENSION : mm)

公端系列套管(型一)

Shur Plug type sleeves (male) Type1



Item No.	$d_1\phi$	$d_2\phi$	$d_3\phi$	ℓ_1	$\ell_2 \pm 0.5$	$L \pm 1.5$	$t \pm 0.2$	
R4225	2.5	3.8	5.0	2.5	4.5	14.0	1.0	O142
R4228	2.7	3.7	5.0	2.8	4.5	15.0	1.0	O142
SE6105	3.0	4.1	5.2	2.8	4.5	15.0	1.0	
R4235	3.5	4.4	5.3	3.0	4.5	16.0	1.0	O142
R4240	4.0	4.7	5.5	3.0	4.5	14.5	1.0	O142
R3528	2.8	3.3	3.8	3.0	4.5	14.0	1.0	O142

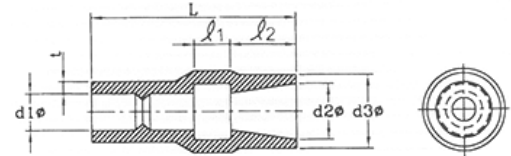


公端系列套管(型二)

Shur Plug type sleeves (male) Type2



Item No.	$d_1\phi$	$d_2\phi$	$d_3\phi$	ℓ_1	$\ell_2 \pm 0.5$	$L \pm 1.5$	W_1	W_2	$t \pm 0.2$
SE6105G	2.6	1.9	5.7	3.6	3.4	10.8	-	-	-

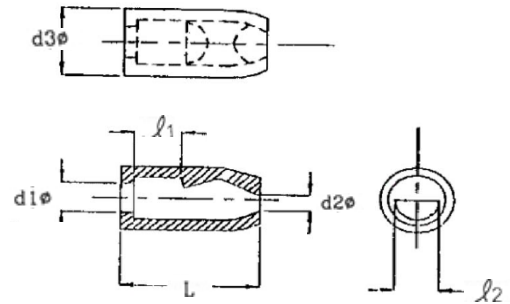


公端系列套管(型三)

Shur Plug type sleeves (male) Type3



Item No.	$d_1\phi$	$d_2\phi$	$d_3\phi$	ℓ_1	$\ell_2 \pm 0.5$	$L \pm 1.5$	W_1	W_2	$t \pm 0.2$
SE6105G-N	1.85	4.5	6.5	-	-	16.5	-	-	-

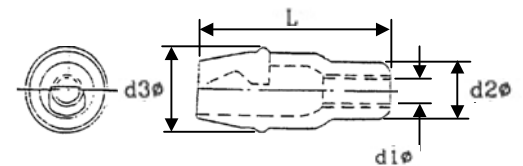


母端系列套管(型一)

Shur Plug type sleeves (female) Type1



Item No.	$d_1\phi$	$d_2\phi$	$d_3\phi$	ℓ_1	$\ell_2 \pm 0.5$	$L \pm 1.5$	$t \pm 0.2$	
SE6104	2.5	3.8	5.0	2.6	23.0	33.0	1.0	O142
R5028	2.8	4.0	5.0	2.8	23.0	33.0	1.0	O142
R5030	3.2	4.3	5.2	3.0	23.0	33.0	1.0	O142
R5035	3.5	4.5	5.0	3.0	23.0	33.0	1.0	O142
R5040	4.0	4.8	5.5	2.8	23.5	33.0	1.0	O142
R4028	2.8	3.7	4.0	2.8	23.0	32.0	1.0	O142
SE6106	3.2	4.3	5.2	3.0	23.0	30.0	1.0	
SE6116	3.2	4.3	5.2	3.0	23.0	28.0	1.0	
SE6106N-L	2.5	4.5	6.0	-	-	40.0	1.0	



套管 SLEEVES

材質: 高級軟質PVC
依溫度姓可分為三級:
1.一般品:耐溫90℃以下
2.耐燃品(H):耐溫100℃以下
3.高級品(UL):耐溫105℃

Material: High quality soft P.V.C
According to the rating temperature we differentiate them into three categories :
1.Common products: rated temperature is under 90℃
2.Medium products: rated temperature is under 100℃
3.High level products: rated temperature is 105℃

形式 FORM


(尺寸 DIMENSION : mm)

母端系列套管(型二)

Shur Plug type sleeves (female) Type2



Item No.	$d_1\phi$	$d_2\phi$	$d_3\phi$	ℓ_1	$\ell_2 \pm 0.5$	$L \pm 1.5$	W_1	W_2	$t \pm 0.2$
SE6106-N	1.9	5.5	7.0	-	-	35.0	-	-	-

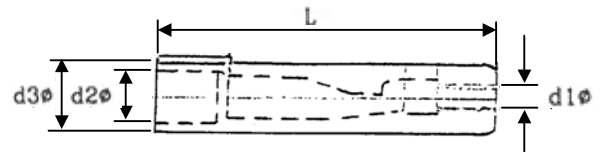



母端系列套管(型三)

Shur Plug type sleeves (female) Type3



Item No.	$d_1\phi$	$d_2\phi$	$d_3\phi$	ℓ_1	$\ell_2 \pm 0.5$	$L \pm 1.5$	W_1	W_2	$t \pm 0.2$
SE6106G	5.1	7.5	7.2	-	-	25.8	-	-	-
SE6116G	4.6	7.95	7.5	-	-	24.3	-	-	-
* SE6216G	4.3	7.9	7.7	2.5	10.5	21.4	-	-	-

* Please refer to the picture(II)

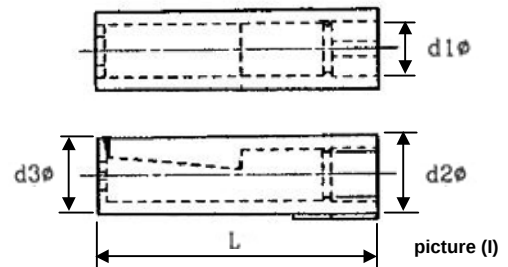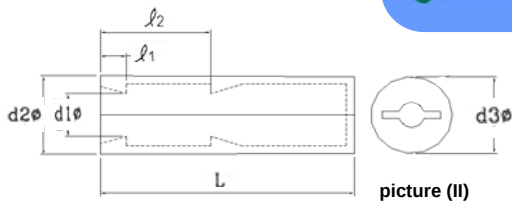


母端系列套管(型四)

Shur Plug type sleeves (female) Type4



Item No.	$d_1\phi$	$d_2\phi$	$d_3\phi$	$d_4\phi$	ℓ_1	$\ell_2 \pm 0.5$	$L \pm 1.5$	$t \pm 0.2$
SE6106-W	3.0	8.2	15.0	18.0	5.2	17.0	30.0	-

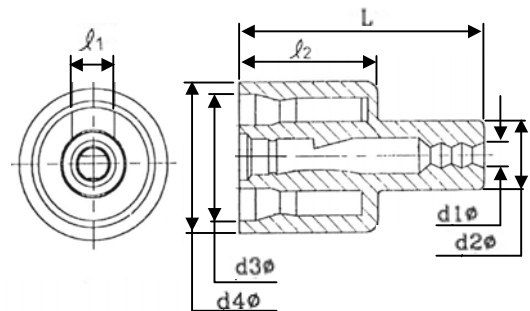


母端套管倒穿型

Shur Plug type sleeves (female)



Item No.	$d_1\phi$	$d_2\phi$	$d_3\phi$	$d_4\phi$	ℓ_1	$\ell_2 \pm 0.5$	$L \pm 1.5$	$t \pm 0.2$
R5845	4.5	5.0	5.5	3.8	8.0	7.5	32.0	1.0
R3850	5.0	5.0	3.8	-	8.0	-	25.0	-

O142
O142

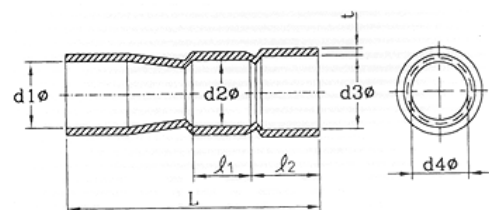

套管 SLEEVES

材質: 高級軟質PVC
依溫度姓可分為三級:
1.一般品:耐溫90℃以下
2.耐燃品(H):耐溫100℃以下
3.高級品(UL):耐溫105℃

Material: High quality soft P.V.C
According to the rating temperature we differentiate them into three categories :
1.Common products: rated temperature is under 90℃
2.Medium products: rated temperature is under 100℃
3.High level products: rated temperature is 105℃

形式 FORM


(尺寸 DIMENSION : mm)

葫蘆型公端套管

Shur Plug type sleeves (male)



Item No.	$d_1\phi$	$d_2\phi$	$d_3\phi$	l_1	$l_2 \pm 0.5$	$L \pm 1.5$	$t \pm 0.2$	
R7025	2.5	7.3	3.6	3.0	17.0	27.0	1.0	O142
R7028	2.8	7.0	3.8	3.0	18.0	27.0	1.0	O142
R7035	3.5	7.3	3.5	2.3	19.5	30.0	1.0	O142

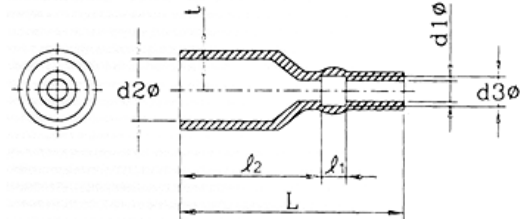


三管型母端套管

Three way type sleeves (female)



Item No.	$d_1\phi$	$d_2\phi$	$d_3\phi$	l_1	$l_2 \pm 0.5$	$L \pm 1.5$	W_1	W_2	$t \pm 0.2$	
P1250	3.0	5.0	4.0	10.5	24.0	37.0	5.0	12.0	1.0	O142

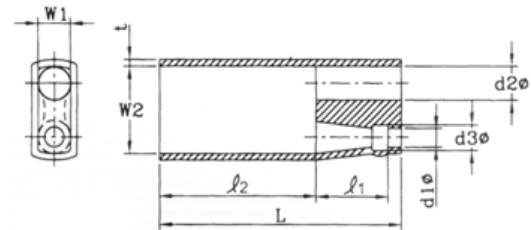


雙管型母端套管

Two way type sleeve (female)



Item No.	$d_1\phi$	$d_2\phi$	l_1	$l_2 \pm 0.5$	$L \pm 1.5$	W_1	W_2	$t \pm 0.2$	
S1225	2.5	3.6	3.5	25.5	35.0	12.0	4.5	1.0	O142
SE6126	3.2	4.0	3.0	26.0	35.0	12.0	4.5	1.0	
S1240	4.0	5.2	3.5	25.5	35.0	12.0	4.5	1.0	O142

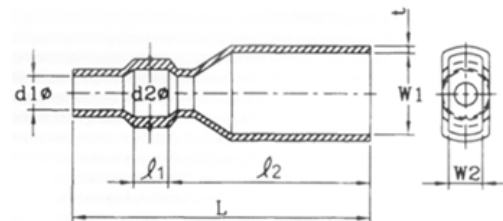


110直型母端套管

110 flat type sleeves



Item No.	$d_1\phi$	$d_2\phi$	l_1	$l_2 \pm 0.5$	$L \pm 1.5$	W_1	W_2	$t \pm 0.2$	
S4020	2.0	3.0	2.4	14.6	22.0	4.0	2.1	1.0	O142
S4025	2.5	3.3	2.4	14.6	22.0	4.0	2.1	1.0	O142
S4028	2.8	3.7	2.5	14.5	22.0	4.0	2.1	1.0	O142
S4030	3.0	3.7	2.5	14.5	22.0	4.0	2.1	1.0	O142
S4035	3.5	4.0	2.5	14.5	22.0	4.0	2.1	1.0	O142

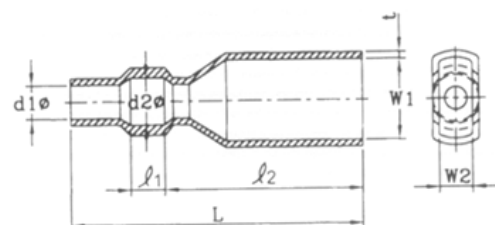

套管 SLEEVES

材質: 高級軟質PVC
依溫度姓可分為三級:
1.一般品:耐溫90℃以下
2.耐燃品(H):耐溫100℃以下
3.高級品(UL):耐溫105℃

Material: High quality soft P.V.C
According to the rating temperature we differentiate them into three categories :
1.Common products: rated temperature is under 90℃
2.Medium products: rated temperature is under 100℃
3.High level products: rated temperature is 105℃

形式 FORM


(尺寸 DIMENSION : mm)

187直型母端套管

187 flat type sleeves



Item No.	$d_1 \phi$	$d_2 \phi$	ℓ_1	$\ell_2 \pm 0.5$	$L \pm 1.5$	W_1	W_2	$t \pm 0.2$	
S5820	2.0	2.8	2.8	14.0	22.0	5.8	2.6	1.0	O142
S5825	2.5	3.5	2.8	14.0	22.0	5.8	2.6	1.0	O142
S187-3.0	3.0	3.8	2.8	14.0	22.0	5.8	2.6	1.0	
S187-3.0-UL	3.0	3.8	2.8	14.0	22.0	5.8	2.6	1.0	
S187-3.5	3.4	4.3	2.8	14.0	22.0	5.8	2.6	1.0	
S5840	4.0	4.9	2.8	14.0	22.0	5.8	2.6	1.0	O142

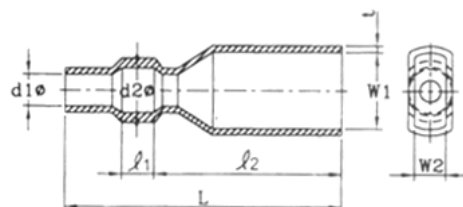


205直型母端套管

205 flat type sleeves



Item No.	$d_1 \phi$	$d_2 \phi$	ℓ_1	$\ell_2 \pm 0.5$	$L \pm 1.5$	W_1	W_2	$t \pm 0.2$	
S6520	2.0	2.8	2.8	14.0	24.0	6.5	3.0	1.0	O142
S6525	2.5	3.5	3.0	14.0	24.0	6.5	3.0	1.0	O142
S6530	3.0	4.1	3.0	14.0	24.0	6.5	3.1	1.0	O142
S205	3.5	4.4	3.0	14.0	24.0	6.5	3.0	1.0	
S6540	4.0	5.0	3.0	14.0	24.0	6.5	3.0	1.0	O142

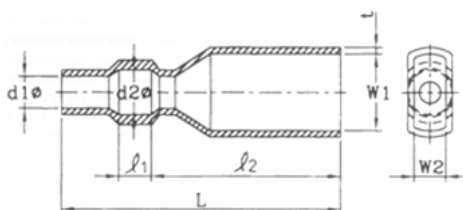


250直型母端套管

250 flat type sleeves



Item No.	$d_1 \phi$	$d_2 \phi$	ℓ_1	$\ell_2 \pm 0.5$	$L \pm 1.5$	W_1	W_2	$t \pm 0.2$	
S250	2.5	3.7	3.0	17.0	26.0	7.8	3.6	1.0	
S250-2.5-28	2.5	3.7	3.0	17.0	28.0	7.8	3.6	1.0	
S8028	2.8	4.0	3.0	17.0	26.0	7.8	3.6	1.0	O142
S250-3.0	3.0	4.1	3.2	17.0	26.0	7.8	3.6	1.0	
S250-3.0-28	3.0	4.1	3.2	17.0	28.0	7.8	3.6	1.0	
S250-3.5-UL	3.5	4.5	3.2	17.0	27.0	7.8	3.5	1.0	
S8038	3.8	5.0	3.0	17.0	26.0	7.9	3.5	1.0	O142
S250-4.0	4.1	5.1	3.2	17.0	27.0	8.0	3.6	1.0	
S8045	4.5	5.6	3.0	17.0	27.0	8.0	3.6	1.0	O142
S250-5.0	5.0	6.1	3.2	17.0	27.0	7.8	3.6	1.0	
S9038	3.8	4.8	3.3	23.5	35.3	9.0	3.7	1.0	O142
SE6206-2.5	2.5	-	-	-	36.5	7.8	5.8	1.0	

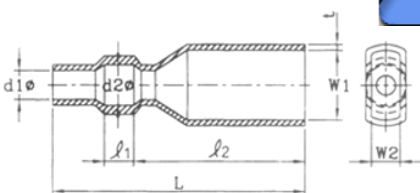


250直型公端套管

250 flat type sleeves(male)



Item No.	$d_1 \phi$	$d_2 \phi$	ℓ_1	$\ell_2 \pm 0.5$	$L \pm 1.5$	W_1	W_2	$t \pm 0.2$	
S9528	2.8	3.8	3.0	16.3	27.5	9.5	5.0	1.0	O142
S9535	3.5	4.6	3.0	16.0	26.0	9.5	5.0	1.0	O142
S9540	4.0	5.0	3.0	16.0	26.0	9.5	5.0	1.0	O142

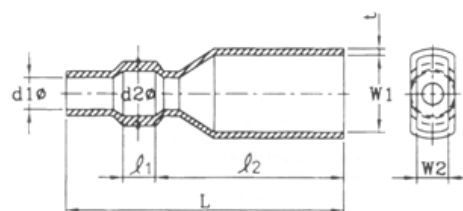

套管 SLEEVES

材質: 高級軟質PVC
依溫度姓可分為三級:
1.一般品:耐溫90℃以下
2.耐燃品(H):耐溫100℃以下
3.高級品(UL):耐溫105℃

Material: High quality soft P.V.C
According to the rating temperature we differentiate them into three categories :
1.Common products: rated temperature is under 90℃
2.Medium products: rated temperature is under 100℃
3.High level products: rated temperature is 105℃

形式 FORM


(尺寸 DIMENSION : mm)

直型倒穿式套管(型一)

Post Insertion type sleeves (Type1)



Item No.	A	B	C	D±1.5	E	F	G	H	I±0.1	t±0.2	
A110	4.0	6.3	6.0	21.0	1.1	2.0	2.0	4.0	1.4	1.0	O142
A187	5.8	6.8	6.5	23.0	1.35	2.8	2.8	5.8	1.8	1.0	O142
A205	6.3	7.4	7.2	22.0	1.3	2.6	2.6	6.3	1.5	1.0	O142
A250	7.6	9.5	8.7	26.0	1.2	3.2	3.2	7.6	2.0	1.0	O142

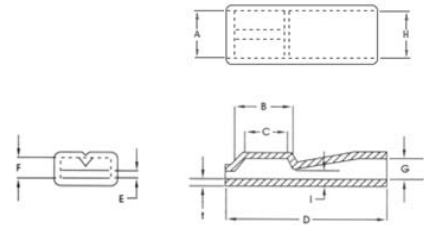


直型倒穿式套管(型二)

Post Insertion type sleeves (Type2)




Item No.	d ₁ φ	d ₂ φ	d ₃ φ	l ₁	l ₂ ±0.5	L±1.5	W ₁	W ₂	t±0.2	
S187-142	2.6	4.0	5.0	6.5	14.0	24.0	5.2	2.5	1.0	O142
S250-142	3.0	4.2	6.9	6.5	15.0	26.0	6.5	3.0	1.0	O142

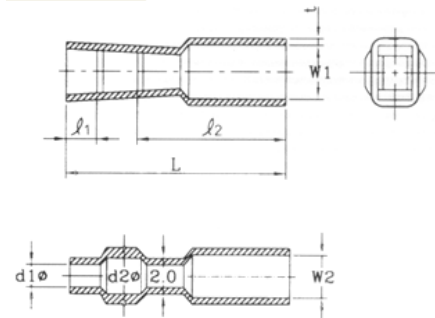

傳統式旗型套管

Conventional flag type sleeves

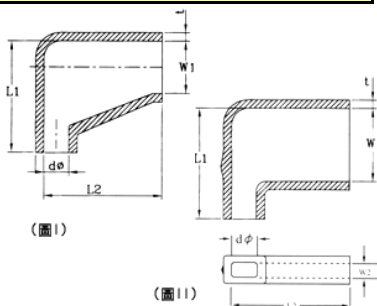


Item No.	dφ	L ₁ ±1.0	L ₂ ±1.0	W ₁	W ₂	t±0.2	Remark	
S187FLAG	3.0	12.0	13.0	6.2	3.0	1.0	187 type	
*S205FLAG	4.0	14.0	15.0	8.0	3.5	1.0	205 type	O142
*F8845	4.5	13.0	15.0	8.8	3.5	1.0	250 type	O142
F8532	3.2	16.4	17.5	8.4	3.2	1.0	250 type	O142
S250FLAG	4.0	18.0	18.0	9.5	4.0	1.0	250 type	
S250FLAG-UL	4.0	18.0	18.0	9.5	4.0	1.0	250 type	
F8550	5.0	18.0	18.0	9.2	4.4	1.0	250 type	O142

* Please refer to the picture(II)

倒穿式旗型套管

Post Insertion Flag type sleeves

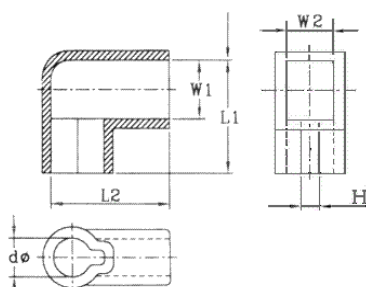

Item No.	dφ	L ₁ ±1.0	L ₂ ±1.0	W ₁	W ₂	t±0.2	H	
F110	2.8	12.0	14.0	4.0	2.8	1.0	1.0	O142
F187	3.0	12.0	13.0	6.4	3.0	1.0	1.0	O142
S205FLAG-H	3.3	13.0	14.0	7.0	3.0	1.0	1.0	
S250FLAG-H	4.0	13.0	16.0	8.2	4.0	1.0	1.0	
F250/18	4.0	16.0	18.0	9.0	4.0	1.0	1.0	O142

套管 SLEEVES

材質: 高級軟質PVC
依溫度姓可分為三級:
1.一般品:耐溫90℃以下
2.耐燃品(H):耐溫100℃以下
3.高級品(UL):耐溫105℃

Material: High quality soft P.V.C
According to the rating temperature we differentiate them into three categories :
1.Common products: rated temperature is under 90℃
2.Medium products: rated temperature is under 100℃
3.High level products: rated temperature is 105℃

形式 FORM


(尺寸 DIMENSION : mm)

其他套管

Other



Item No.	$d_1\phi$	$d_2\phi$	$d_3\phi$	ℓ_1	$\ell_2 \pm 0.5$	$L \pm 1.5$	W_1	W_2	$t \pm 0.2$
SE6118	3.1	5.8	-	21.0	-	13.0	-	-	1.0

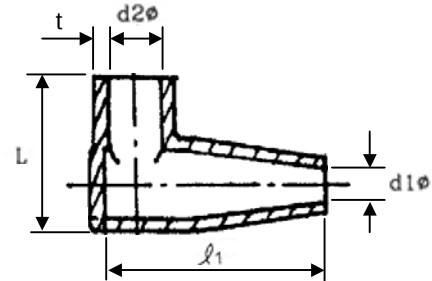


187 易扣型(型一)

187 One touch sleeves Type1



Item No.	H	W	L	E	Material	Class	
3PV-187	13.5	8.1	9.2	-	PA66	Housing	O3
6610901	2.35	5.6	10.0	6.4	Brass	Terminal	O3
6610911	2.6	5.6	10.0	6.4	Brass	Terminal	O3

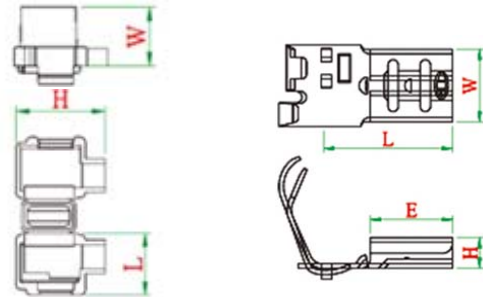


187 易扣型(型二)

187 One touch sleeves Type2



Item No.	H	W	L	E	Material	Class	
H187	4.0	8.8	31.3	-	PA66	Housing	K
T187	2.4	5.6	15.0	6.3	Brass	Terminal	

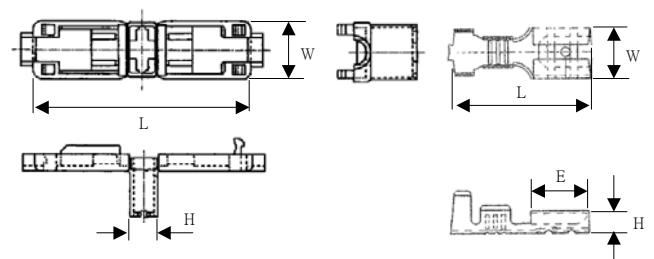


205 易扣型

205 One touch sleeves



Item No.	H	W	L	E	Material	Class	
3PF-103	9.8	4.6	15.2	-	PA66	Housing	O3
6610301	2.6	6.3	11.9	6.2	Brass	Terminal	O3

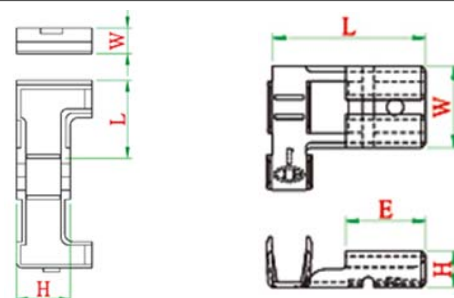

套管 SLEEVES

材質: 高級軟質PVC
依溫度姓可分為三級:
1.一般品:耐溫90℃以下
2.耐燃品(H):耐溫100℃以下
3.高級品(UL):耐溫105℃

Material: High quality soft P.V.C
According to the rating temperature we differentiate them into three categories :
1.Common products: rated temperature is under 90℃
2.Medium products: rated temperature is under 100℃
3.High level products: rated temperature is 105℃

形式 FORM


(尺寸 DIMENSION : mm)

250 易扣型(型一)

250 One touch sleeves Type1



Item No.	H	W	L	E	Material	Class	
3PF-102	5.5	6.3	44.8	-	PA66	Housing	O3
6610201	3.0	7.6	16.7	7.8	Brass	Terminal	O3

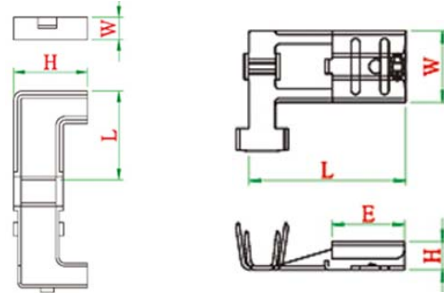



250 易扣型(型二)

250 One touch sleeves Type2




Item No.	H	W	L	E	Material	Class	
HFLAG250	16.0	5.1	25.2	3.0	PA66	Housing	K
SB:2	16.9	6.3	25.4	4.2	PA66	Housing	HP
H29	16.9	6.3	25.4	3.0	PA66	Housing	HP
T41802	-	8.0	16.7	7.6	Brass	Terminal	
*H26	17.2	5.4	30.2	3.5	PA66	Housing	HP
T175057-1	-	7.6	19.3	7.8	Brass	Terminal	K

* Please refer to the picture(II)

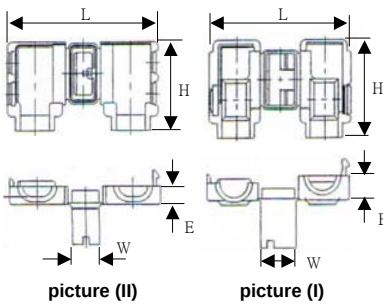



250 易扣型(型三)

250 One touch sleeves Type3

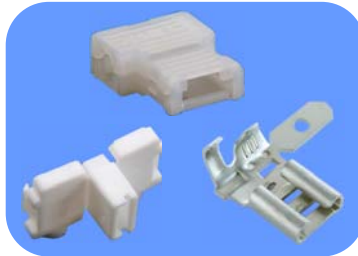

Item No.	H	W	L	E	Material	Class	
*3PF-108	15.6	6.7	17.7	-	PA66	Housing	O3
3PV-250	16.1	10.7	9.9	-	PA66	Housing	O3
6610801	3.1	8.0	12.0	7.8	Brass	Terminal	O3

* Please refer to the picture(II)

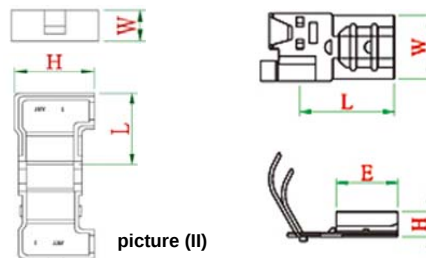

250 易扣型(型四)

250 One touch sleeves Type4



Item No.	H	W	L	E	Material	Class	
H250	4.7	9.8	36.8	-	PA66	Housing	K
TET250F-M	2.8	7.5	19.3	7.8	PA66	Terminal	

